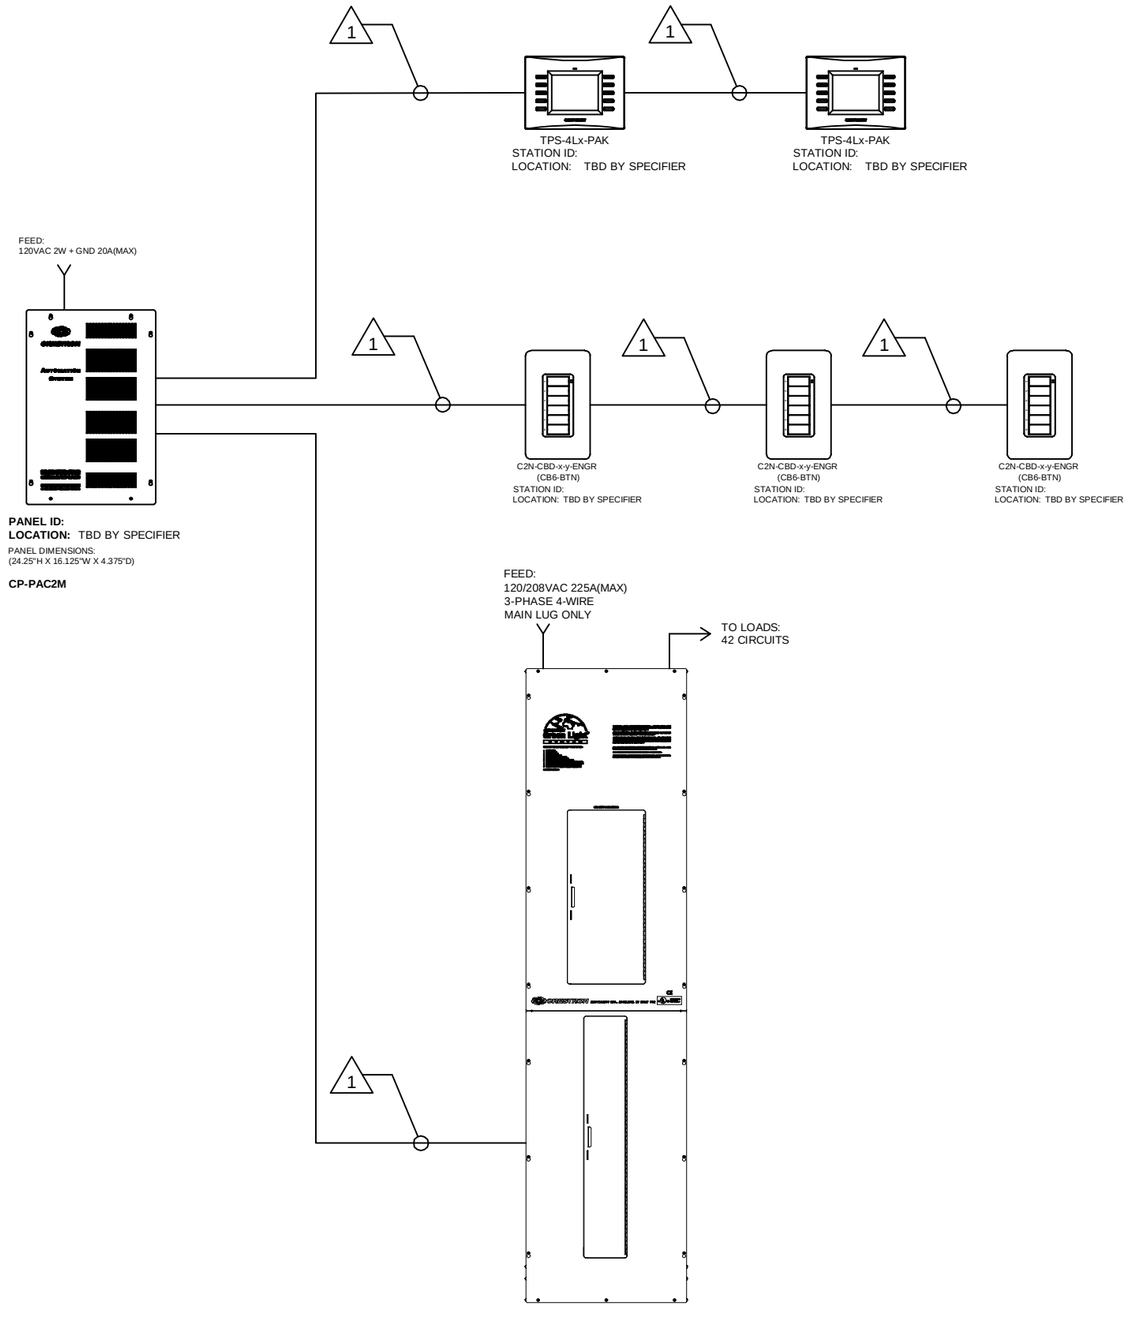

NOTES:

1. "CRESNET" CABLE:
   (1) PAIR #18AWG,
   (1) TWISTED PAIR 22AWG
   W/SHIELD (BY E.C.)
   NON-PLENUM PN: CRESNET-NP-TL
   PLENUM PN: CRESNET-P-TL
2. RS-232 CABLE:
   (1) TWISTED PAIR 22AWG
   (1) SHIELD
   DB-9 CONNECTOR
   (BY E.C.)
3. CABLE:
   (1) TWISTED PAIR 18AWG
   (1) SHIELD
   (BY E.C.)
4. CABLE:
   CAT5E ETHERNET

***ALL PHYSICAL DEVICE LOCATIONS TO BE COORDINATED WITH ARCHITECT.

CRESNET WIRING RUNS SHOWN AS HOME RUN TO EACH DEVICE FOR OPTIMAL PERFORMANCE. DAISY CHAIN AND OR STAR TOPOLOGIES ARE PERMITTED TO SUIT INSTALLATION NEEDS. TOTAL END TO END WIRE LENGTH NOT TO EXCEED 500'.

REVISIONS	DATE	BY
00	12-03-08	VB

PROJECT: 120V 42-CKT SWITCHING SYSTEM

LOCATION:

QUOTE #:

SALES REP:

DISTRIBUTOR:

PO #:

CRESTRON
15 Volvo Drive
Rockleigh NJ 07647
Tel: 888-273-7876
Fax: 201-767-6011
www.crestron.com

TITLE:

ONE-LINE
RISER
(FOR INFORMATION ONLY)

DRAWING:

1.0