

# UC-BRKT-100-Z-ASSY

## UC Engine Assembly

The UC-BRKT-100-Z-ASSY simplifies installation of a Crestron® Flex UC conference system, providing all the necessary components connected and mounted on a single VESA® compliant mounting bracket. The bracket mounts behind a display device in a conference room or directly to drywall using the included anchors. The UC-BRKT-100-Z-ASSY is intended for use with the M-Series, B-Series, and C-Series of Crestron Flex conference systems. For more information, visit [www.crestron.com/flex](http://www.crestron.com/flex).

### Check the Box

Item	Qty
Anchor, Drywall, Plastic, 3/8 in. x 1/2 in. (P/N 2052565)	2
Key, Anchor (P/N 4529654)	1
Bit, Spanner, #6 (P/N 2052847)	1
Screw, 6-32 x 3/8 in., Undercut Head, Spanner (P/N 2052846)	2
Screw, 8-AB x 1-1/2 in., Pan Head, Combo (P/N 2052567)	2
Power Cord (P/N 2053985)	1
Tie Wrap (P/N 2047935)	4


### Install the Wall Bracket Assembly

The wall bracket can be mounted to VESA compliant display devices or building structure. Anchors and screws are also supplied for installation on walls 3/8 in. to 3/4 in. thickness.


#### NOTES:

- The integrated cable tie wraps are reusable. Take care to avoid damage to the cable tie wraps.
- The wall bracket assembly includes an opening and pass through screw holes for placement over a single gang US electrical wall box that can be covered by a decorative wall plate. If the wall plate opening will be positioned over an electrical wall box, longer screws will be needed to secure the decorative wall plate to the electrical box. Do not attempt to secure the wall bracket assembly with the wall plate opening screws.

#### UC-BRKT-100-Z-ASSY (connecting cables not shown)

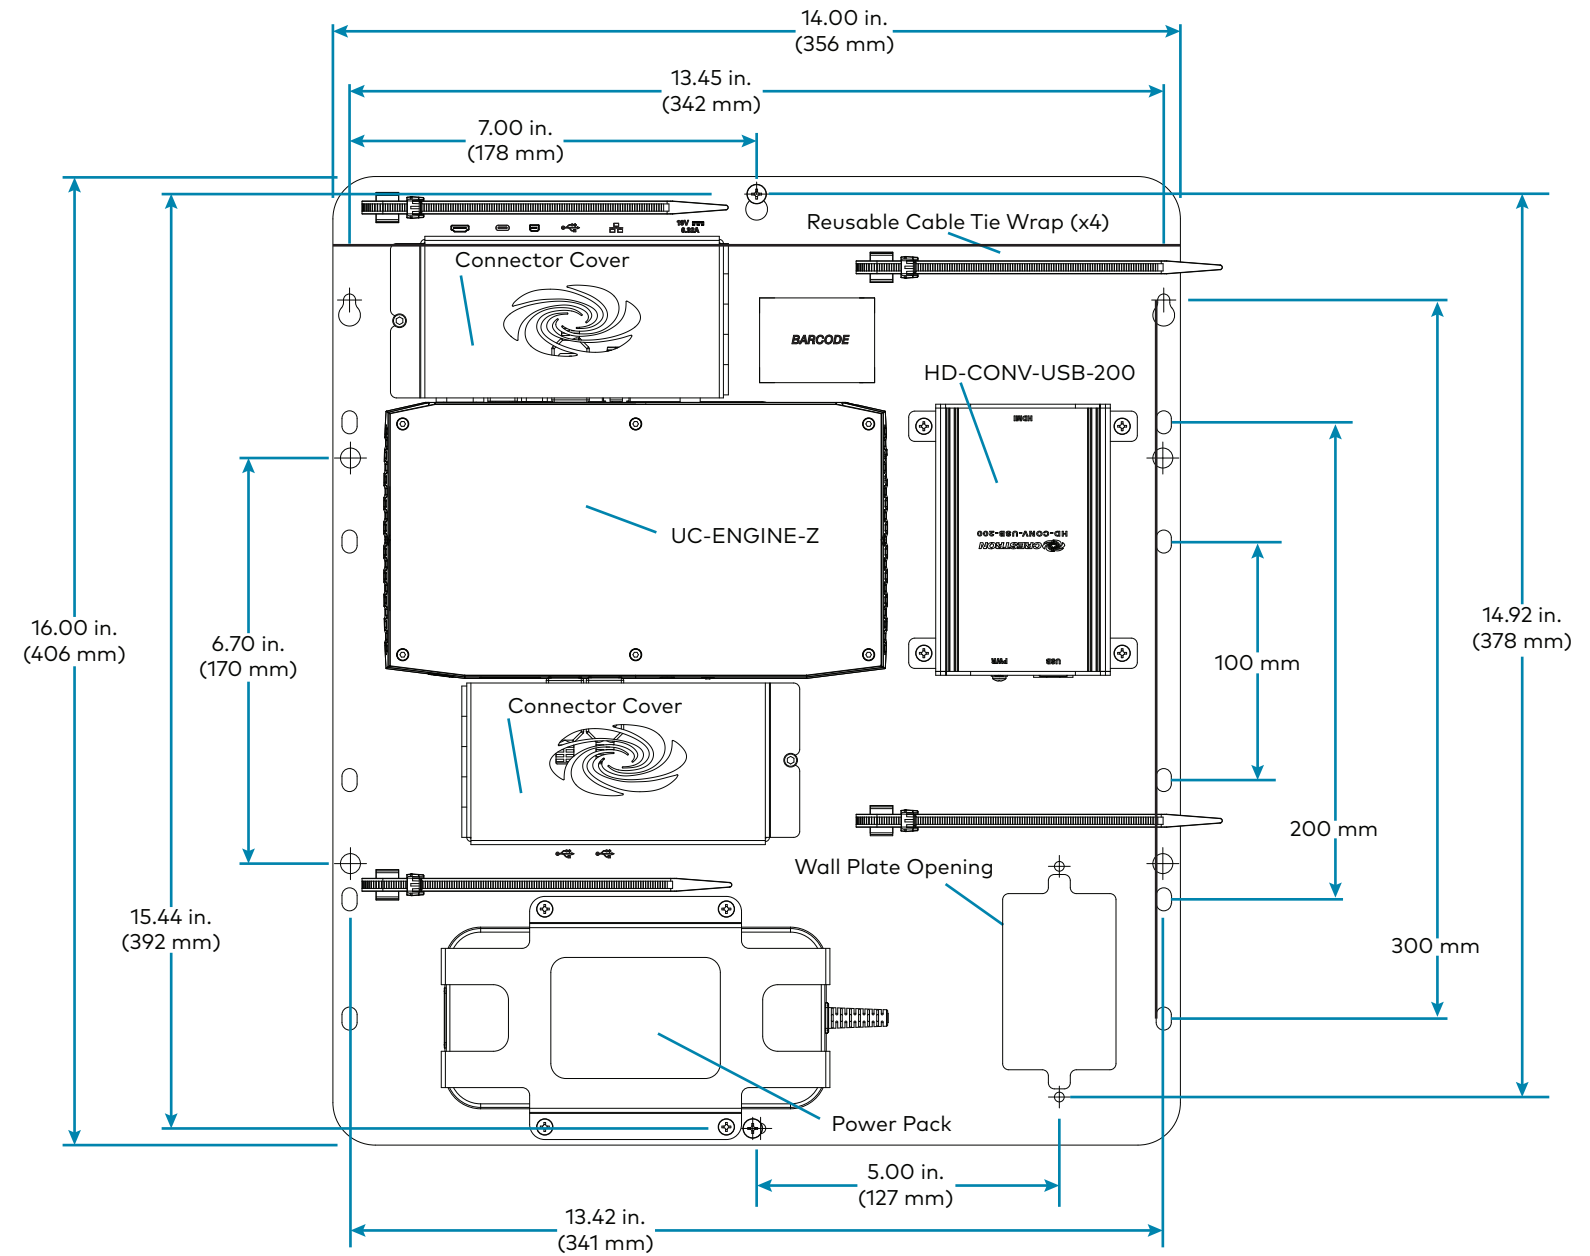

## »» Open the Connector Covers

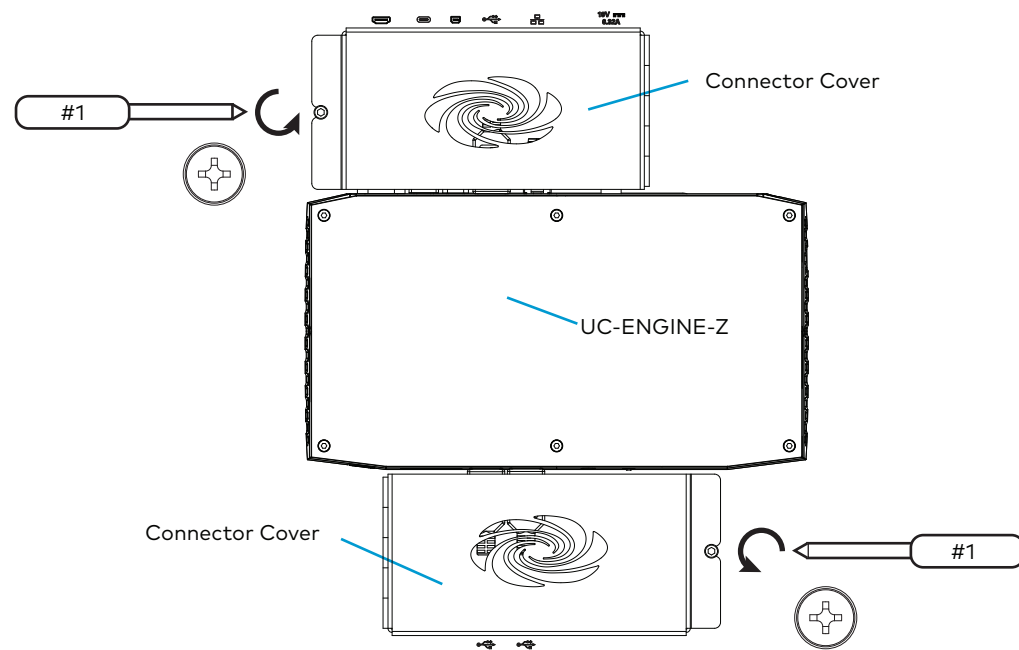


## »» Connect Devices

Connect touch screens, conference systems, display devices, network cables, and peripherals to components on the UC-BRKT-100-Z-ASSY. Refer to the quick start guide included with the Crestron Flex UC System.

**CAUTION:** The bracket assembly has cables and devices that are connected at the factory. **DO NOT DISCONNECT ANY DEVICES OR CABLES THAT ARE ALREADY CONNECTED.**

## »» Secure Connector Covers

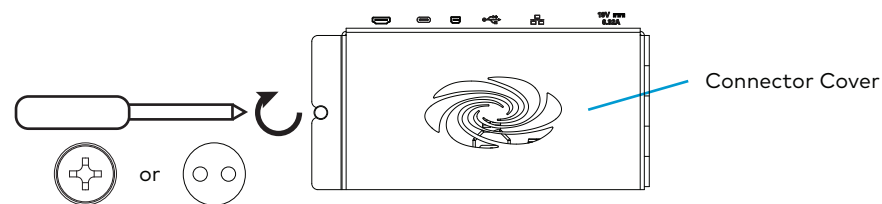

**NOTE:** For additional security, replace the screws with the included spanner screws. A 1/4 in. driver bit is supplied to install the spanner screws.

## »» For Additional Information

Scan or click the QR codes below for detailed product information.



UC-BRKT-100-Z-ASSY Flex Solutions

## Compliance and Legal

**Original Instructions:** The U.S. English version of this document is the original instructions. All other languages are a translation of the original instructions.

The product warranty can be found at [www.crestron.com/warranty](http://www.crestron.com/warranty).

The specific patents that cover Crestron products are listed at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/opensource](http://www.crestron.com/opensource).

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

©2019 Crestron Electronics, Inc.

**Crestron Electronics, Inc.**  
15 Volvo Drive, Rockleigh, NJ 07647  
Tel: 888.CRESTRON  
Fax: 201.767.7576  
[www.crestron.com](http://www.crestron.com)

**Quick Start - Doc. 8500B**  
(2054243)  
09/26/19  
Specifications subject to  
change without notice.