



View this document in HTML
crestron.com/docs/9552



Product Manual

TSS-880 and TSS-1080

8.1 in. and 10.1 in. Room Scheduling
Touch Screens

Have feedback on this document? Contact docfeedback@crestron.com.

The original language version of this document is U.S. English.
All other languages are a translation of the original document.

Regulatory Model: M202404001 and M202404002

This product is licensed under the Crestron Software End-User License Agreement, available at www.crestron.com/Legal/software-license-agreement/Crestron-Software-End-User-License-Agreement.

Crestron product development software is licensed to Crestron dealers and Crestron Service Providers (CSPs) under a limited nonexclusive, nontransferable Software Development Tools License Agreement. Crestron product operating system software is licensed to Crestron dealers, CSPs, and end-users under a separate End-User License Agreement. Both of these Agreements can be found on the Crestron website at www.crestron.com/legal/software_license_agreement.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed online at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Certain Crestron products collect information that may include personal data. For further details regarding those Crestron products that collect, process, and transmit information directly to Crestron via the internet, refer to the Crestron Privacy Statement Regarding Internet Data Collection, located at www.crestron.com/legal-data-collection-privacy.

Crestron, the Crestron logo, and XiO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Ad Astra is either a trademark or a registered trademark of Ad Astra Information Systems, LLC in the United States and/or other countries. Bluetooth is either a trademark or registered trademark of Bluetooth SIG, Inc. in the United States and/or other countries. CollegeNET and 25Live are either trademarks or registered trademarks of CollegeNET, Inc. in the United States and/or other countries. G Suite and Google Calendar are either trademarks or registered trademarks of Google, Inc. in the United States and/or other countries. Microsoft, Active Directory, Azure, Microsoft Exchange Server, Microsoft 365, and Outlook are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. UL is either a trademark or a registered trademark of Underwriters Laboratories, Inc. in the United States and/or other countries. Wi-Fi is either a trademark or registered trademark of Wi-Fi Alliance in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

©2026 Crestron Electronics, Inc.

Contents

TSS-880 and TSS-1080	6
Features	7
TSS-880 Features	8
TSS-880-GV-B Features	12
TSS-1080 Features	16
TSS-1080-GV-B Features	20
TSS-80 Physical Description	24
Rear	24
Specifications	25
TSS-880 Specifications	26
Product Specifications	26
Dimension Drawings	29
TSS-880-GV-B Specifications	31
Product Specifications	31
Dimension Drawings	34
TSS-1080 Specifications	36
Product Specifications	36
Dimension Drawings	39
TSS-1080-GV-B Specifications	41
Product Specifications	41
Dimension Drawings	44
Getting Started	46
Installation	46
Initial Setup	46
Web Configuration	46
Local Configuration	46
Installation	47
TSS-80 Installation	48
In the Box	48
Install the Mounting Bracket	48
Electrical Box Mounting	49
Drywall Mounting	50
Connect the Touch Screen	51
Mount the Touch Screen	52
TSW-880-1080-MSMK-ANG Installation	53
In the Box	53
TSW-880/1080-MSMK-ANG Mounting Instructions	53
TSW-880/1080-MSMK Installation	61
In the Box	61

TSW-880-1080-MSMK Mounting Instructions	61
TSW-880-1080-MUMK Installation	67
In the Box	67
TSW-880/1080-MUMK Side Mounting Configuration	68
TSW-880/1080-MUMK Front Mounting Configuration	73
Connect the Touch Screen	76
TSW-UMB-80 Installation	77
In the Box	77
TSW-UMB-80 Mounting Instructions	77
TSW-UMB-80-BBI Installation	81
In the Box	81
TSW-UMB-80-BBI Mounting Instructions	81
TSW-UMB-U-PMK Installation	85
In the Box	85
TSW-UMB-U-PMK Mounting Instructions	85
TSW-RMB Installation	87
In the Box	87
TSW-RMB Mounting Instructions	87
Install with a Back Box	88
Install without a Back Box	88
TSW-RMK Installation	90
In the Box	90
TSW-RMK Mounting Instructions	90
Configuration	92
Initial Setup	93
Complete the Setup Wizard	93
Access the Device Settings Screens	99
Access the Web Configuration Interface	99
Web Configuration	101
Action Menu	103
Status	106
Settings	114
Local Configuration	146
Access the Settings Screens	146
Accessibility	147
Network Settings	148
Bluetooth	151
Display	155
System	157
Microsoft	158
About	159
Admin	160
Application Selection	161
Operation	162

Resources163

 Crestron Support and Training163

 Programmer and Developer Resources163

 Product Certificates163

 Related Documentation163

TSS-880 and TSS-1080

Crestron TSS-80 series touch screens are designed to enhance and simplify room scheduling across an enterprise. The touch screens install near a meeting room or huddle space to provide a clear indication of its availability and scheduling and integrates seamlessly with a variety of popular scheduling services.

This manual covers the TSS-880 and TSS-1080.

For TS-80 Series touch screens, refer to the [TS-880 and TS-1080 Product Manual](#).

For TSW-80 Series touch screens, refer to the [TSW-880 and TSW-1080 Product Manual](#).

For Unified Communications (UC) variant touch screens, refer to the [TS-1080-UC and TSW-1080-UC Product Manual](#).

Refer to [Getting Started on page 46](#) for important information on using your product and this document.

This section provides the following information:

- [Features](#)
- [TSS-80 Physical Description](#)

Features

This section provides the following information:

- [TSS-880 Features](#)
- [TSS-880-GV-B Features](#)
- [TSS-1080 Features](#)
- [TSS-1080-GV-B Features](#)

TSS-880 Features

Key features include:

- Next generation Crestron touch screen designed for enterprise room scheduling applications
- 8.1 in. (204 mm) widescreen active-matrix color display and 1280 x 800 WXGA display resolution
- Integrates directly with various room scheduling services
- Integrated light bar for at-a-glance indication of room availability
- Standard U.S., U.K., and European electrical box installation with additional mounting options available
- Single wire Ethernet connection with PoE or PoE+ power
- Wi-Fi® network connectivity
- USB-C 2.0 port for room availability accessories
- Enterprise grade security and authentication
- Available in white or black finish



Crestron Room Scheduling App

As part of a complete enterprise solution, the TSS-880 serves as a room booking interface through the Crestron Room Scheduling app. If desired, a room can be reserved on the spot for an ad hoc meeting. A [CEN-ODT-C-POE](#) occupancy sensor can also be paired to the touch screen, allowing for occupancy status to be reported instantly to the scheduling app for no shows and unscheduled room usage.^{2,3}

Running the Crestron Scheduling App, the TSS-880 integrates directly with Microsoft Exchange Server® software (for users of Outlook® software and Microsoft 365® software), the Google Calendar™ calendaring app (including G Suite™ software), CollegeNET® 25Live® scheduling software, or Ad Astra™ software.

Third-Party Scheduling Apps

The TSS-880 also includes support for various third-party scheduling applications. New providers are made available via firmware or over the air updates. Whatever provider you choose, setup is as simple as connecting the touch screen to the network and choosing an app from the built-in setup screens. The selected app downloads from the cloud and installs on the touch screen without any programming or control system required.^{4,5}

Built for Enterprise Scheduling Applications

The TSS-880 is an enterprise-grade device engineered to meet all the demands of a corporate office, conference center, or higher education environment. Its 8.1 in. (201 mm) capacitive display provides an intuitive user interface dedicated for scheduling rooms and viewing essential meeting details. The UI can be customized and branded with your choice of background images and logos. A larger 10.1 in. (257 mm) version ([TSS-1080](#) series) is also available.¹

- **Functional:** The TSS-880 provides everything needed for scheduling applications in one compact unit that mounts over a standard electrical box or cutout. The touch screen offers Gigabit Ethernet and PoE/PoE+ connectivity, or, for deployments without access to Ethernet, it can be connected to the network over Wi-Fi® communications via a local wireless access point (WAP).
- **Versatile:** Crestron offers a variety of options for mounting the TSS-880 to drywall, masonry, glass, mullions, and other surfaces. Optional hallway sign accessories are available [here](#) to increase the visibility of the room availability status.
- **Reliable:** Consumer tablets are meant for mobile handheld use and not permanent installs. By contrast, Crestron touch screens are purpose-built for permanent installation and years of reliable 24/7 operation in a commercial environment. To ensure the touch screen is using the latest features, the TSS-880 checks nightly for app updates and loads the latest version automatically.
- **Secure:** Crestron touch screens run Microsoft® Device Ecosystem Platform (MDEP) and employ enterprise-grade networking with robust security features such as 802.1X authentication, TLS encryption, HTTPS connectivity, and Active Directory® service integration. These features protect your network against service interruptions and malicious intrusions and ensure compliance with your organization's network policies.
- **Manageable:** Crestron touch screens feature cloud-based management to streamline the process of configuring and monitoring every touch screen on the network and keeping them updated. They also support Simple Network Management Protocol (SNMP), so they can be monitored by your IT administrator alongside every other device on the network.
- **Cost-Effective:** Crestron touch screens offer clear advantages over other alternatives, but that doesn't mean they cost more. The TSS-880 delivers a comparable or lower cost solution compared to buying tablets with all the extra peripherals and maintenance they require.

Integrated Light Bars

The TSS panels include integrated light bars on either side that provide users with an at-a-glance indication of room availability from both the sides and front. The light bars default to displaying red when a room is occupied and green when it is available, but can also be configured to display a full range of RGB colors.

Power over Ethernet

Using PoE technology, the TSS-880 gets its operating power directly through the network cable. PoE (Power over Ethernet) eliminates the need for a local power supply or any dedicated power wiring. Crestron PoE switches offer a total networking solution with built in PoE for multiple touch screens. Refer to the full list of supported PoE switches [here](#).

NOTE: Refer to the Power specifications for more details.

XiO Cloud Service

The TSS-880 is compatible with the XiO Cloud® service, which is an IoT (Internet of Things) based platform for remotely monitoring and managing Crestron devices across an enterprise or an entire client base. Built on the Microsoft® Azure® software platform and utilizing Microsoft's industry leading Azure IoT Hub technology, XiO Cloud enables installers and IT managers to deploy and manage thousands of devices simultaneously. Unlike other virtual machine based cloud solutions, Azure services provide unlimited scalability to suit the ever growing needs of an enterprise. For more information, visit the [XiO Cloud](#) page.

Proximity Sensor and Brightness Controls

The TSS-880 provides a built-in proximity sensor that wakes the screen without requiring any user interaction, and automatic brightness controls ensure optimal visibility under varying lighting conditions.

Room Scheduling Accessories

The TSS-880 provides a USB-C port for connecting supported Crestron room scheduling accessories to the touch screen.²

Wall Mount Options

Using the bracket provided, the TSS-880 is easily installed over a 2-gang or 3-gang US electrical box, or a 2-gang European or UK electrical box. A security latch option is included to deter unauthorized removal of the touch screen.

Additional wall mounting options are afforded using the optional [TSW-UMB-80](#) universal mounting bracket, [TSW-UMB-80-PMK](#) preconstruction mounting kit, and [TSW-UMB-80-BBI](#) back box (sold separately).

Optional Mounting Accessories

The TSS-880 supports numerous optional mounting accessories that allow the touch screen to be installed in all kinds of installations.

- The [TSW-880/1080-MSMK](#) multisurface mount kit allows a touch screen to be mounted directly to virtually any flat surface, which is ideal for mounting at the entrance to a meeting space for room scheduling applications.²
- The [TSW-880/1080-MUMK](#) allows the touch screen to be attached to the mullion of an interior glass wall, window, or partition.²
- The [TSW-880/1080-MSMK-ANG](#) multisurface mount kit allows a touch screen to be mounted directly to virtually any flat surface while displaying at an angle for easier viewing.

The TSS-880 is also compatible with Wall-Smart® flush wall mount products via a partnership with Crestron. Refer to [Wall-Smart](#) for more information on supported hardware.

Notes:

1. Web browsing, weather information, and certain other functions require an internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. Room scheduling mode requires the TSS-880 to be designated exclusively for room scheduling use, which precludes use of certain features and functions described in this spec sheet. Additionally, CollegeNET® 25Live® scheduling software and Ad Astra™ software do not support scheduling ad hoc meetings from the touch screen. For design assistance, contact the Crestron True Blue support team at www.crestron.com/support.
4. Refer to the firmware release notes for a list of all scheduling apps that are supported by that firmware release.
5. Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services. Third party apps typically run on the TSS-880 as they do on a tablet device. The TSS-880 runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron can run on the TSS-880.

TSS-880-GV-B Features

Key features include:

- Next generation Crestron touch screen designed for enterprise room scheduling applications
- 8.1 in. (204 mm) widescreen active-matrix color display and 1280 x 800 WXGA display resolution
- Integrates directly with various room scheduling services
- Native apps for various room scheduling services
- Integrated light bar for at-a-glance indication of room availability
- Standard U.S., U.K., and European electrical box installation with additional mounting options available
- Single wire Ethernet connection with PoE or PoE+ power
- USB-C 2.0 port for room availability accessories
- Enterprise grade security and authentication
- Eliminates the TSS-80 Series microphone, Bluetooth®, proximity sensor, and Wi-Fi® to comply with government security standards



Crestron Room Scheduling App

As part of a complete enterprise solution, the TSS-880-GV serves as a room booking interface through the Crestron Room Scheduling app. If desired, a room can be reserved on the spot for an ad hoc meeting. A [CEN-ODT-C-POE](#) occupancy sensor can also be paired to the touch screen, allowing for occupancy status to be reported instantly to the scheduling app for no shows and unscheduled room usage.^{2,3}

Running the Crestron Scheduling App, the TSS-880-GV integrates directly with Microsoft Exchange Server® software (for users of Outlook® software and Microsoft 365® software), the Google Calendar™ calendaring app (including G Suite™ software), CollegeNET® 25Live® scheduling software, or Ad Astra™ software.

Third-Party Scheduling Apps

The TSS-880-GV also includes support for various third-party scheduling applications. New providers are made available via firmware or over the air updates. Whatever provider you choose, setup is as simple as connecting the touch screen to the network and choosing an app from the built-in setup screens. The selected app downloads from the cloud and installs on the touch screen without any programming or control system required.^{4,5}

Built for Enterprise Scheduling Applications

The TSS-880-GV is an enterprise-grade device engineered to meet all the demands of a corporate office, conference center, or higher education environment. Its 8.1 in. (201 mm) capacitive display provides an intuitive user interface dedicated for scheduling rooms and viewing essential meeting details. The UI can be customized and branded with your choice of background images and logos. A larger 10.1 in. (257 mm) version ([TSS-1080](#) series) is also available.¹

- **Functional:** The TSS-880-GV provides everything needed for scheduling applications in one compact unit that mounts over a standard electrical box or cutout. The touch screen offers Gigabit Ethernet and PoE/PoE+ connectivity, or, for deployments without access to Ethernet, it can be connected to the network over Wi-Fi® communications via a local wireless access point (WAP).
- **Versatile:** Crestron offers a variety of options for mounting the TSS-880-GV to drywall, masonry, glass, mullions, and other surfaces. Optional hallway sign accessories are available [here](#) to increase the visibility of the room availability status.
- **Reliable:** Consumer tablets are meant for mobile handheld use and not permanent installs. By contrast, Crestron touch screens are purpose-built for permanent installation and years of reliable 24/7 operation in a commercial environment. To ensure the touch screen is using the latest features, the TSS-880-GV checks nightly for app updates and loads the latest version automatically.
- **Secure:** Crestron touch screens run Microsoft® Device Ecosystem Platform (MDEP) and employ enterprise-grade networking with robust security features such as 802.1X authentication, TLS encryption, HTTPS connectivity, and Active Directory® service integration. These features protect your network against service interruptions and malicious intrusions and ensure compliance with your organization's network policies.
- **Manageable:** Crestron touch screens feature cloud-based management to streamline the process of configuring and monitoring every touch screen on the network and keeping them updated. They also support Simple Network Management Protocol (SNMP), so they can be monitored by your IT administrator alongside every other device on the network.
- **Cost-Effective:** Crestron touch screens offer clear advantages over other alternatives, but that doesn't mean they cost more. The TSS-880-GV delivers a comparable or lower cost solution compared to buying tablets with all the extra peripherals and maintenance they require.

Integrated Light Bars

The TSS panels include integrated light bars on either side that provide users with an at-a-glance indication of room availability from both the sides and front. The light bars default to displaying red when a room is occupied and green when it is available, but can also be configured to display a full range of RGB colors.

Power over Ethernet

Using PoE technology, the TSS-880-GV gets its operating power directly through the network cable. PoE (Power over Ethernet) eliminates the need for a local power supply or any dedicated power wiring. Crestron PoE switches offer a total networking solution with built in PoE for multiple touch screens. Refer to the full list of supported PoE switches [here](#).

NOTE: Refer to the Power specifications for more details.

XiO Cloud Service

The TSS-880-GV is compatible with the XiO Cloud® service, which is an IoT (Internet of Things) based platform for remotely monitoring and managing Crestron devices across an enterprise or an entire client base. Built on the Microsoft® Azure® software platform and utilizing Microsoft's industry leading Azure IoT Hub technology, XiO Cloud enables installers and IT managers to deploy and manage thousands of devices simultaneously. Unlike other virtual machine based cloud solutions, Azure services provide unlimited scalability to suit the ever growing needs of an enterprise. For more information, visit the [XiO Cloud](#) page.

Proximity Sensor and Brightness Controls

The TSS-880-GV provides a built-in proximity sensor that wakes the screen without requiring any user interaction, and automatic brightness controls ensure optimal visibility under varying lighting conditions.

Room Scheduling Accessories

The TSS-880-GV provides a USB-C port for connecting supported Crestron room scheduling accessories to the touch screen.²

Wall Mount Options

Using the bracket provided, the TSS-880-GV is easily installed over a 2-gang or 3-gang US electrical box, or a 2-gang European or UK electrical box. A security latch option is included to deter unauthorized removal of the touch screen.

Additional wall mounting options are afforded using the optional [TSW-UMB-80](#) universal mounting bracket, [TSW-UMB-80-PMK](#) preconstruction mounting kit, and [TSW-UMB-80-BBI](#) back box (sold separately).

Optional Mounting Accessories

The TSS-880-GV supports numerous optional mounting accessories that allow the touch screen to be installed in all kinds of installations.

- The [TSW-880/1080-MSMK](#) multisurface mount kit allows a touch screen to be mounted directly to virtually any flat surface, which is ideal for mounting at the entrance to a meeting space for room scheduling applications.²
- The [TSW-880/1080-MUMK](#) allows the touch screen to be attached to the mullion of an interior glass wall, window, or partition.²
- The [TSW-880/1080-MSMK-ANG](#) multisurface mount kit allows a touch screen to be mounted directly to virtually any flat surface while displaying at an angle for easier viewing.

The TSS-880-GV is also compatible with Wall-Smart® flush wall mount products via a partnership with Crestron. Refer to [Wall-Smart](#) for more information on supported hardware.

Notes:

1. Web browsing, weather information, and certain other functions require an internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. Room scheduling mode requires the TSS-880-GV to be designated exclusively for room scheduling use, which precludes use of certain features and functions described in this spec sheet. Additionally, CollegeNET® 25Live® scheduling software and Ad Astra™ software do not support scheduling ad hoc meetings from the touch screen. For design assistance, contact the Crestron True Blue support team at www.crestron.com/support.
4. Refer to the firmware release notes for a list of all scheduling apps that are supported by that firmware release.
5. Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services. Third party apps typically run on the TSS-880-GV as they do on a tablet device. The TSS-880-GV runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron can run on the TSS-880-GV.

TSS-1080 Features

Key features include:

- Next generation Crestron touch screen designed for enterprise room scheduling applications
- 10.1 in. (257 mm) widescreen active-matrix color display and 1920x1200 WUXGA display resolution
- Integrates directly with various room scheduling services
- Integrated light bar for at-a-glance indication of room availability
- Standard U.S., U.K., and European electrical box installation with additional mounting options available
- Single wire Ethernet connection with PoE or PoE+ power
- Wi-Fi® network connectivity
- USB-C 2.0 port for room availability accessories
- Enterprise grade security and authentication
- Available in white or black finish



Crestron Room Scheduling App

As part of a complete enterprise solution, the TSS-1080 serves as a room booking interface through the Crestron Room Scheduling app. If desired, a room can be reserved on the spot for an ad hoc meeting. A [CEN-ODT-C-POE](#) occupancy sensor can also be paired to the touch screen, allowing for occupancy status to be reported instantly to the scheduling app for no shows and unscheduled room usage.^{2,3}

Running the Crestron Scheduling App, the TSS-1080 integrates directly with Microsoft Exchange Server® software (for users of Outlook® software and Microsoft 365® software), the Google Calendar™ calendaring app (including G Suite™ software), CollegeNET® 25Live® scheduling software, or Ad Astra™ software.

Third-Party Scheduling Apps

The TSS-1080 also includes support for various third-party scheduling applications. New providers are made available via firmware or over the air updates. Whatever provider you choose, setup is as simple as connecting the touch screen to the network and choosing an app from the built-in setup screens. The selected app downloads from the cloud and installs on the touch screen without any programming or control system required.^{4,5}

Built for Enterprise Scheduling Applications

The TSS-1080 is an enterprise-grade device engineered to meet all the demands of a corporate office, conference center, or higher education environment. Its 10.1 in. (257 mm) capacitive display provides an intuitive user interface dedicated for scheduling rooms and viewing essential meeting details. The UI can be customized and branded with your choice of background images and logos.

- **Functional:** The TSS-1080 provides everything needed for scheduling applications in one compact unit that mounts over a standard electrical box or cutout. The touch screen offers Gigabit Ethernet and PoE/PoE+ connectivity, or, for deployments without access to Ethernet, it can be connected to the network over Wi-Fi® communications via a local wireless access point (WAP).
- **Versatile:** Crestron offers a variety of options for mounting the TSS-1080 to drywall, masonry, glass, mullions, and other surfaces. Optional hallway sign accessories are available [here](#) to increase the visibility of the room availability status.
- **Reliable:** Consumer tablets are meant for mobile handheld use and not permanent installs. By contrast, Crestron touch screens are purpose-built for permanent installation and years of reliable 24/7 operation in a commercial environment. To ensure the touch screen is using the latest features, the TSS-1080 checks nightly for app updates and loads the latest version automatically.
- **Secure:** Crestron touch screens run Microsoft® Device Ecosystem Platform (MDEP) and employ enterprise-grade networking with robust security features such as 802.1X authentication, TLS encryption, HTTPS connectivity, and Active Directory® service integration. These features protect your network against service interruptions and malicious intrusions and ensure compliance with your organization's network policies.
- **Manageable:** Crestron touch screens feature cloud-based management to streamline the process of configuring and monitoring every touch screen on the network and keeping them updated. They also support Simple Network Management Protocol (SNMP), so they can be monitored by your IT administrator alongside every other device on the network.
- **Cost-Effective:** Crestron touch screens offer clear advantages over other alternatives, but that doesn't mean they cost more. The TSS-1080 delivers a comparable or lower cost solution compared to buying tablets with all the extra peripherals and maintenance they require.

Integrated Light Bars

The TSS panels include integrated light bars on either side that provide users with an at-a-glance indication of room availability from both the sides and front. The light bars default to displaying red when a room is occupied and green when it is available, but can also be configured to display a full range of RGB colors.

Power over Ethernet

Using PoE technology, the TSS-1080 gets its operating power directly through the network cable. PoE (Power over Ethernet) eliminates the need for a local power supply or any dedicated power wiring.

Crestron PoE switches offer a total networking solution with built in PoE for multiple touch screens. Refer to the full list of supported PoE switches [here](#).

NOTE: Refer to the Power specifications for more details.

XiO Cloud Service

The TSS-1080 is compatible with the XiO Cloud® service, which is an IoT (Internet of Things) based platform for remotely monitoring and managing Crestron devices across an enterprise or an entire client base. Built on the Microsoft® Azure® software platform and utilizing Microsoft's industry leading Azure IoT Hub technology, XiO Cloud enables installers and IT managers to deploy and manage thousands of devices simultaneously. Unlike other virtual machine based cloud solutions, Azure services provide unlimited scalability to suit the ever growing needs of an enterprise. For more information, visit the [XiO Cloud](#) page.

Proximity Sensor and Brightness Controls

The TSS-1080 provides a built-in proximity sensor that wakes the screen without requiring any user interaction, and automatic brightness controls ensure optimal visibility under varying lighting conditions.

Room Scheduling Accessories

The TSS-1080 provides a USB-C port for connecting supported Crestron room scheduling accessories to the touch screen.²

Wall Mount Options

Using the bracket provided, the TSS-1080 is easily installed over a 2-gang or 3-gang US electrical box, or a 2-gang European or UK electrical box. A security latch option is included to deter unauthorized removal of the touch screen.

Additional wall mounting options are afforded using the optional [TSW-UMB-80](#) universal mounting bracket, [TSW-UMB-80-PMK](#) preconstruction mounting kit, and [TSW-UMB-80-BBI](#) back box (sold separately).

Optional Mounting Accessories

The TSS-1080 supports numerous optional mounting accessories that allow the touch screen to be installed in all kinds of installations.

- The [TSW-880/1080-MSMK](#) multisurface mount kit allows a touch screen to be mounted directly to virtually any flat surface, which is ideal for mounting at the entrance to a meeting space for room scheduling applications.²
- The [TSW-880/1080-MUMK](#) allows the touch screen to be attached to the mullion of an interior glass wall, window, or partition.²
- The [TSW-880/1080-MSMK-ANG](#) multisurface mount kit allows a touch screen to be mounted directly to virtually any flat surface while displaying at an angle for easier viewing.

The TSS-1080 is also compatible with Wall-Smart® flush wall mount products via a partnership with Crestron. Refer to [Wall-Smart](#) for more information on supported hardware.

Notes:

1. Web browsing, weather information, and certain other functions require an internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. Room scheduling mode requires the TSS-1080 to be designated exclusively for room scheduling use, which precludes use of certain features and functions described in this spec sheet. Additionally, CollegeNET® 25Live® scheduling software and Ad Astra™ software do not support scheduling ad hoc meetings from the touch screen. For design assistance, contact the Crestron True Blue support team at www.crestron.com/support.
4. Refer to the firmware release notes for a list of all scheduling apps that are supported by that firmware release.
5. Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services. Third party apps typically run on the TSS-1080 as they do on a tablet device. The TSS-1080 runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron can run on the TSS-1080.

TSS-1080-GV-B Features

Key features include:

- Next generation Crestron touch screen designed for enterprise room scheduling applications
- 10.1 in. (257 mm) widescreen active-matrix color display and 1920x1200 WUXGA display resolution
- Integrates directly with various room scheduling services
- Native apps for various room scheduling services
- Integrated light bar for at-a-glance indication of room availability
- Standard U.S., U.K., and European electrical box installation with additional mounting options available
- Single wire Ethernet connection with PoE or PoE+ power
- USB-C 2.0 port for room availability accessories
- Enterprise grade security and authentication
- Eliminates the TSS-80 Series microphone, Bluetooth®, proximity sensor, and Wi-Fi® to comply with government security standards



Crestron Room Scheduling App

As part of a complete enterprise solution, the TSS-1080-GV serves as a room booking interface through the Crestron Room Scheduling app. If desired, a room can be reserved on the spot for an ad hoc meeting. A [CEN-ODT-C-POE](#) occupancy sensor can also be paired to the touch screen, allowing for occupancy status to be reported instantly to the scheduling app for no shows and unscheduled room usage.^{2,3}

Running the Crestron Scheduling App, the TSS-1080-GV integrates directly with Microsoft Exchange Server® software (for users of Outlook® software and Microsoft 365® software), the Google Calendar™ calendaring app (including G Suite™ software), CollegeNET® 25Live® scheduling software, or Ad Astra™ software.

Third-Party Scheduling Apps

The TSS-1080-GV also includes support for various third-party scheduling applications. New providers are made available via firmware or over the air updates. Whatever provider you choose, setup is as simple as connecting the touch screen to the network and choosing an app from the built-in setup screens. The selected app downloads from the cloud and installs on the touch screen without any programming or control system required.^{4,5}

Built for Enterprise Scheduling Applications

The TSS-1080-GV is an enterprise-grade device engineered to meet all the demands of a corporate office, conference center, or higher education environment. Its 10.1 in. (257 mm) capacitive display provides an intuitive user interface dedicated for scheduling rooms and viewing essential meeting details. The UI can be customized and branded with your choice of background images and logos.

- **Functional:** The TSS-1080-GV provides everything needed for scheduling applications in one compact unit that mounts over a standard electrical box or cutout. The touch screen offers Gigabit Ethernet and PoE/PoE+ connectivity, or, for deployments without access to Ethernet, it can be connected to the network over Wi-Fi® communications via a local wireless access point (WAP).
- **Versatile:** Crestron offers a variety of options for mounting the TSS-1080-GV to drywall, masonry, glass, mullions, and other surfaces. Optional hallway sign accessories are available [here](#) to increase the visibility of the room availability status.
- **Reliable:** Consumer tablets are meant for mobile handheld use and not permanent installs. By contrast, Crestron touch screens are purpose-built for permanent installation and years of reliable 24/7 operation in a commercial environment. To ensure the touch screen is using the latest features, the TSS-1080-GV checks nightly for app updates and loads the latest version automatically.
- **Secure:** Crestron touch screens run Microsoft® Device Ecosystem Platform (MDEP) and employ enterprise-grade networking with robust security features such as 802.1X authentication, TLS encryption, HTTPS connectivity, and Active Directory® service integration. These features protect your network against service interruptions and malicious intrusions and ensure compliance with your organization's network policies.
- **Manageable:** Crestron touch screens feature cloud-based management to streamline the process of configuring and monitoring every touch screen on the network and keeping them updated. They also support Simple Network Management Protocol (SNMP), so they can be monitored by your IT administrator alongside every other device on the network.
- **Cost-Effective:** Crestron touch screens offer clear advantages over other alternatives, but that doesn't mean they cost more. The TSS-1080-GV delivers a comparable or lower cost solution compared to buying tablets with all the extra peripherals and maintenance they require.

Integrated Light Bars

The TSS panels include integrated light bars on either side that provide users with an at-a-glance indication of room availability from both the sides and front. The light bars default to displaying red

when a room is occupied and green when it is available, but can also be configured to display a full range of RGB colors.

Power over Ethernet

Using PoE technology, the TSS-1080-GV gets its operating power directly through the network cable. PoE (Power over Ethernet) eliminates the need for a local power supply or any dedicated power wiring. Crestron PoE switches offer a total networking solution with built in PoE for multiple touch screens. Refer to the full list of supported PoE switches [here](#).

NOTE: Refer to the Power specifications for more details.

XiO Cloud Service

The TSS-1080-GV is compatible with the XiO Cloud® service, which is an IoT (Internet of Things) based platform for remotely monitoring and managing Crestron devices across an enterprise or an entire client base. Built on the Microsoft® Azure® software platform and utilizing Microsoft's industry leading Azure IoT Hub technology, XiO Cloud enables installers and IT managers to deploy and manage thousands of devices simultaneously. Unlike other virtual machine based cloud solutions, Azure services provide unlimited scalability to suit the ever growing needs of an enterprise. For more information, visit the [XiO Cloud](#) page.

Proximity Sensor and Brightness Controls

The TSS-1080-GV provides a built-in proximity sensor that wakes the screen without requiring any user interaction, and automatic brightness controls ensure optimal visibility under varying lighting conditions.

Room Scheduling Accessories

The TSS-1080-GV provides a USB-C port for connecting supported Crestron room scheduling accessories to the touch screen.²

Wall Mount Options

Using the bracket provided, the TSS-1080-GV is easily installed over a 2-gang or 3-gang US electrical box, or a 2-gang European or UK electrical box. A security latch option is included to deter unauthorized removal of the touch screen.

Additional wall mounting options are afforded using the optional [TSW-UMB-80](#) universal mounting bracket, [TSW-UMB-80-PMK](#) preconstruction mounting kit, and [TSW-UMB-80-BBI](#) back box (sold separately).

Optional Mounting Accessories

The TSS-1080-GV supports numerous optional mounting accessories that allow the touch screen to be installed in all kinds of installations.

- The [TSW-880/1080-MSMK](#) multisurface mount kit allows a touch screen to be mounted directly to virtually any flat surface, which is ideal for mounting at the entrance to a meeting space for room scheduling applications.²
- The [TSW-880/1080-MUMK](#) allows the touch screen to be attached to the mullion of an interior glass wall, window, or partition.²

- The [TSW-880/1080-MSMK-ANG](#) multisurface mount kit allows a touch screen to be mounted directly to virtually any flat surface while displaying at an angle for easier viewing.

The TSS-1080-GV is also compatible with Wall-Smart® flush wall mount products via a partnership with Crestron. Refer to [Wall-Smart](#) for more information on supported hardware.

Notes:


1. Web browsing, weather information, and certain other functions require an internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. Room scheduling mode requires the TSS-1080-GV to be designated exclusively for room scheduling use, which precludes use of certain features and functions described in this spec sheet. Additionally, CollegeNET® 25Live® scheduling software and Ad Astra™ software do not support scheduling ad hoc meetings from the touch screen. For design assistance, contact the Crestron True Blue support team at www.crestron.com/support.
4. Refer to the firmware release notes for a list of all scheduling apps that are supported by that firmware release.
5. Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services. Third party apps typically run on the TSS-1080-GV as they do on a tablet device. The TSS-1080-GV runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron can run on the TSS-1080-GV.

TSS-80 Physical Description

The TSS-880 and TSS-1080 provide the following connectors, controls, and indicators.

Rear

The following illustration shows the rear of the touch screen.

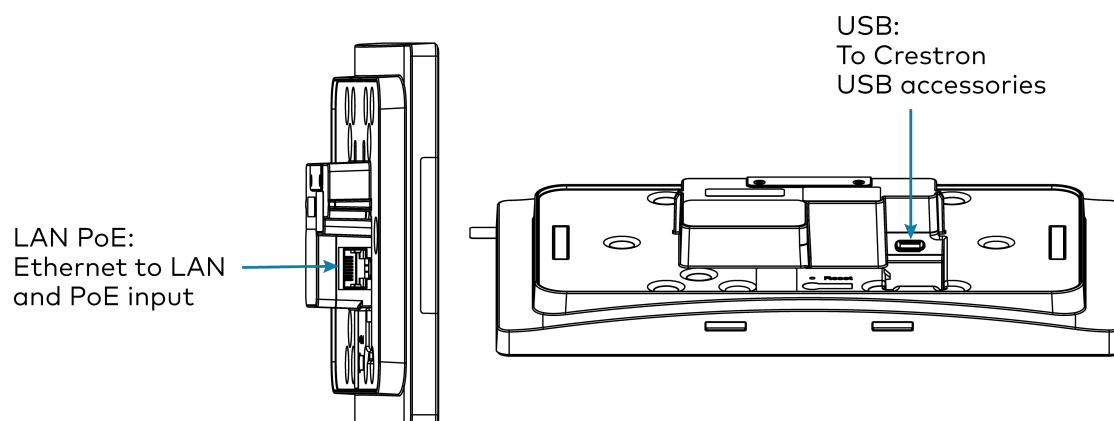

- ① **LAN PoE:** (1) 8-pin RJ-45 connector, female, with 2 LED indicators;
1000BASE-TX Ethernet port;
PoE+ PD port;
Green and yellow LEDs indicate Ethernet port status
- ② **USB:** (1) USB Type C connector, female;
USB 2.0 host port

Specifications

This section provides the following information:

- [TSS-880 Specifications](#)
- [TSS-880-GV-B Specifications](#)
- [TSS-1080 Specifications](#)
- [TSS-1080-GV-B Specifications](#)

TSS-880 Specifications

Product specifications for the TSS-880 are provided below.

Product Specifications

Touch Screen Display

Display Type	TFT active matrix color LCD
Size	8.1 in. (204 mm) diagonal
Aspect Ratio	16:10 WXGA
Resolution	1280 x 800 pixels
Brightness	Minimum: 350 nits (cd/m ²) Maximum: 400 nits (cd/m ²)
Contrast	1000:1
Color Depth	24 bit, 16.7M colors
Illumination	Edgelit LED with auto brightness control
Viewing Angle	±80° horizontal, ±80° vertical
Touch Screen	Projected capacitive, 5 point multitouch capable

Buttons

Virtual Buttons	(6) Virtual buttons in collapsible universal tool bar, per button show/hide, preconfigured with icons for Power, Home, Lights, Up, Down, and Microphone
Reset	(1) Pin hole on bottom for hardware reset

Room Scheduling Support

Crestron Scheduling App	Microsoft Exchange Server® and Microsoft 365® software, Google Calendar™ calendaring app and G Suite™ software, CollegeNET® 25Live® software, and Ad Astra™ software
Third-Party Apps	Includes support for various third-party scheduling applications. ^{3,4,5}

Memory

RAM	8GB LPDDR4
Storage	40GB eMMC pSLC
Maximum Project Size	1000 MB

Wired Communications

Ethernet	1000Mbps, autoswitching, autonegotiating, autodiscovery, full/half duplex, TCP/IP, UDP/IP, CIP, DHCP, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1X, SNMP, IPv4 or IPv6, Active Directory® service authentication, HTTPS web browser setup, XiO Cloud® client, IEEE 802.3 at compliant
USB	USB 2.0 host for room scheduling accessories

Wireless Communications

Transceiver	IEEE 802.11a/b/g/n/ac/ax Wi-Fi 6E (2.4, 5 GHz and 6GHz) 2x2 MIMO, static IP or dynamic IP via DHCP
Security	64 and 128-bit WEP, WPA, WPA2, WPA3, WPA Enterprise and WPA2 Enterprise
Range	Up to 50 ft (15 m), subject to site-specific conditions
Bluetooth® Hardware	Crestron Bluetooth beacon
Radio Frequency (RF) signals	Proximity sensor (Japan): 60.5 to 61 GHz Proximity sensor (Worldwide): 61 to 61.5 GHz

Streaming Decoder

Video Formats	H.265, H.264, MJPEG
Audio Formats	AAC Stereo
Bitrates	Up to 25 Mbps (20 Mbps maximum recommended)
Input Resolutions	Up to 3840x2160@30fps
Protocol	RTSP

Audio

Features	Built-in speakers
-----------------	-------------------

Connectors

LAN PoE	(1) 8-pin RJ-45 connector, female, with 2 LED indicators; 1000BASE-TX Ethernet port; PoE+ PD port; Green and yellow LEDs indicate Ethernet port status
USB	(1) USB Type C connector, female; USB 2.0 host port

Power

PoE (Power over Ethernet)	IEEE 802.3at Type 2 compliant PoE+ PD (Powered Device); Requests 30 W (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP; Requests 15.4 W (PoE Class 0) from an 802.3af (or 802.3at Type 1)
----------------------------------	---

NOTE: Enabling the USB port requires use of an 802.3 at Type 2 PoE+ PSE.

Environmental

Temperature	32 to 104°F (0 to 40°C)
Humidity	10% to 95% RH (noncondensing)
Heat Dissipation	44 BTU/hr

Construction

Housing	ABS plastic housing, smooth black or white finish, glass with black or white surround
Mounting	Surface mount over a 2 or 3-gang US electrical box, 2-gang European (DIN 49073) electrical box, or 2-gang UK (BS 4662) electrical box; Lectern mount over a 2 in. H x 3-3/4 in. W (51 mm H x 96 mm W) cutout; 1-3/8 in. (35 mm) minimum mounting depth; Wall mount, surface mount, and rack options available separately

Dimensions

Height	4.88 in. (124 mm)
Width	7.93 in. (201 mm)
Depth	1.18 in. (30 mm)

Weight

14.6 oz (415 g)

Compliance

Regulatory Model: M202404001


FCC Part 15 Class B, IC Class B, CE, UL® Listed for US and Canada/Intertek®


Notes:

1. Web browsing, weather information, and certain other functions require an internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. Room scheduling mode requires the TSS-880 to be designated exclusively for room scheduling use, which precludes use of certain features and functions described in this spec sheet. Additionally, CollegeNET® 25Live® scheduling software and Ad Astra™ software do not support scheduling ad hoc meetings from the touch screen. For design assistance, contact the Crestron True Blue support team at www.crestron.com/support.
4. Refer to the firmware release notes for a list of all scheduling apps that are supported by that firmware release.

5. Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services. Third party apps typically run on the TSS-880 as they do on a tablet device. The TSS-880 runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron can run on the TSS-880.

Dimension Drawings

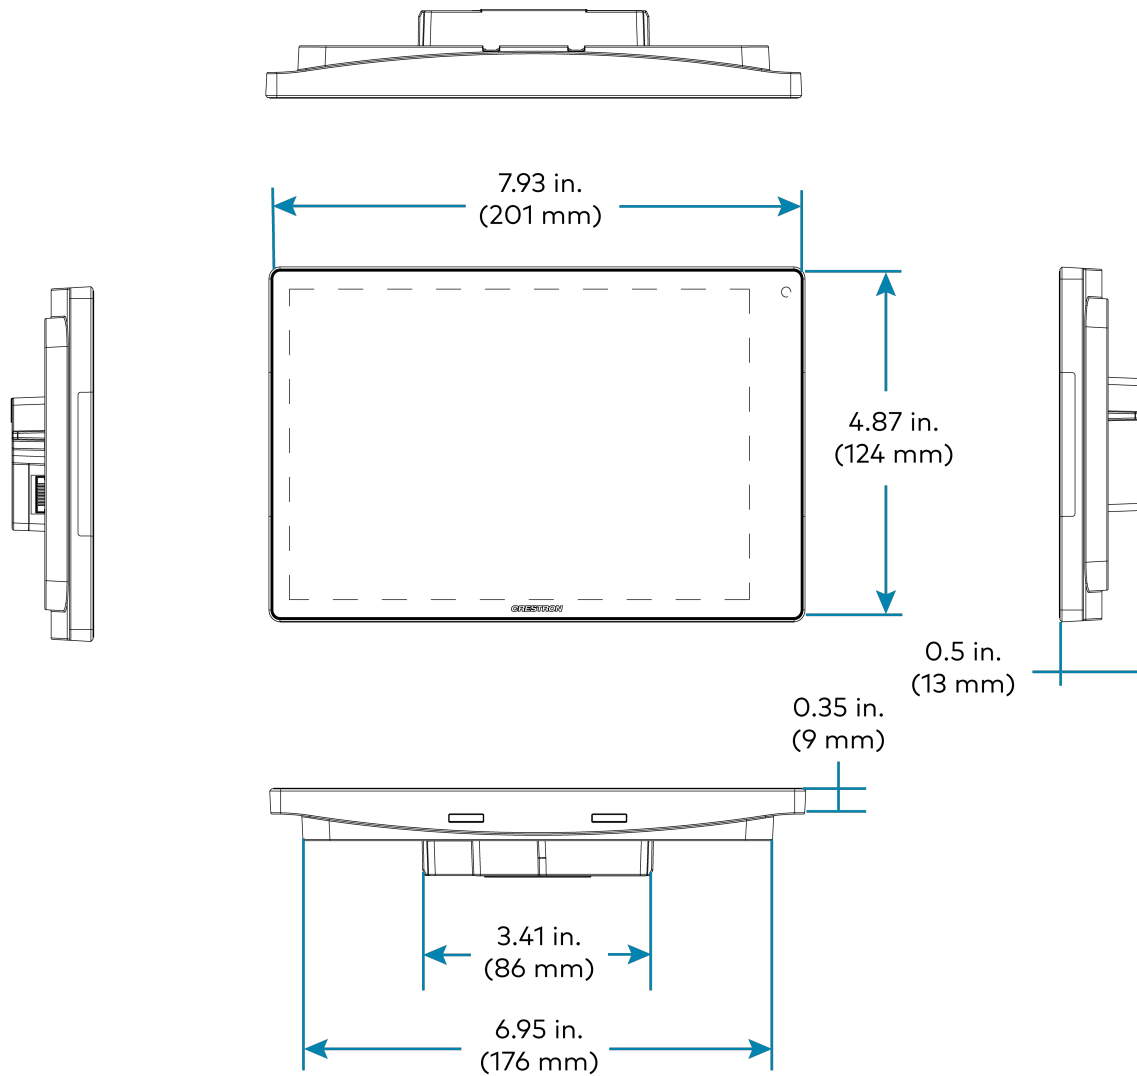

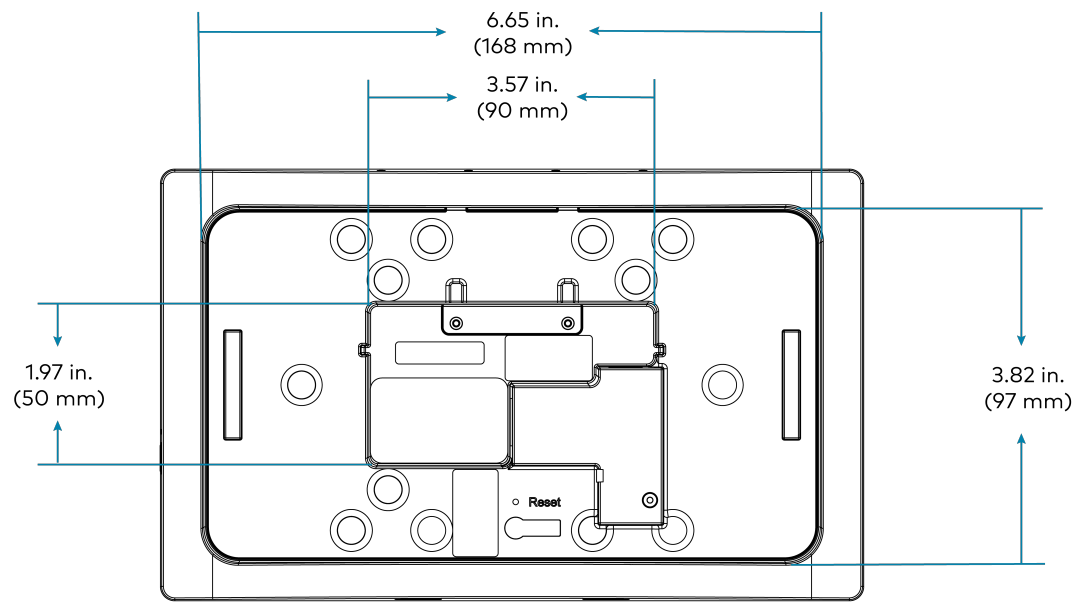

TSS-880-GV-B Specifications

Product specifications for the TSS-880-GV-B are provided below.

Product Specifications

Touch Screen Display

Display Type	TFT active matrix color LCD
Size	8.1 in. (204 mm) diagonal
Aspect Ratio	16:10 WXGA
Resolution	1280 x 800 pixels
Brightness	Minimum: 350 nits (cd/m ²) Maximum: 400 nits (cd/m ²)
Contrast	1000:1
Color Depth	24 bit, 16.7M colors
Illumination	Edgelit LED with auto brightness control
Viewing Angle	±80° horizontal, ±80° vertical
Touch Screen	Projected capacitive, 5 point multitouch capable

Buttons

Virtual Buttons	(6) Virtual buttons in collapsible universal tool bar, per button show/hide, preconfigured with icons for Power, Home, Lights, Up, Down, and Microphone
Reset	(1) Pin hole on bottom for hardware reset

Room Scheduling Support

Crestron Scheduling App	Microsoft Exchange Server® and Microsoft 365® software, Google Calendar™ calendaring app and G Suite™ software, CollegeNET® 25Live® software, and Ad Astra™ software
Third-Party Apps	Includes support for various third-party scheduling applications. ^{3,4,5}

Memory

RAM	8GB LPDDR4
Storage	40GB eMMC pSLC
Maximum Project Size	1000 MB

Wired Communications

Ethernet	1000Mbps, autoswitching, autonegotiating, autodiscovery, full/half duplex, TCP/IP, UDP/IP, CIP, DHCP, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1X, SNMP, IPv4 or IPv6, Active Directory® service authentication, HTTPS web browser setup, XiO Cloud® client, IEEE 802.3 at compliant
USB	USB 2.0 host for room scheduling accessories

Streaming Decoder

Video Formats	H.265, H.264, MJPEG
Audio Formats	AAC Stereo
Bitrates	Up to 25 Mbps (20 Mbps maximum recommended)
Input Resolutions	Up to 3840x2160@30fps
Protocol	RTSP

Audio

Features	Built-in speakers
-----------------	-------------------

Connectors

LAN PoE	(1) 8-pin RJ-45 connector, female, with 2 LED indicators; 1000BASE-TX Ethernet port; PoE+ PD port; Green and yellow LEDs indicate Ethernet port status
USB	(1) USB Type C connector, female; USB 2.0 host port

Power

PoE (Power over Ethernet)	IEEE 802.3at Type 2 compliant PoE+ PD (Powered Device); Requests 30 W (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP; Requests 15.4 W (PoE Class 0) from an 802.3af (or 802.3at Type 1)
----------------------------------	---

NOTE: Enabling the USB port requires use of an 802.3 at Type 2 PoE+ PSE.

Environmental

Temperature	32 to 104°F (0 to 40°C)
Humidity	10% to 95% RH (noncondensing)
Heat Dissipation	44 BTU/hr

Construction

Housing	ABS plastic housing, smooth black or white finish, glass with black or white surround
Mounting	Surface mount over a 2 or 3-gang US electrical box, 2-gang European (DIN 49073) electrical box, or 2-gang UK (BS 4662) electrical box; Lectern mount over a 2 in. H x 3-3/4 in. W (51 mm H x 96 mm W) cutout; 1-3/8 in. (35 mm) minimum mounting depth; Wall mount, surface mount, and rack options available separately

Dimensions

Height	4.88 in. (124 mm)
Width	7.93 in. (201 mm)
Depth	1.18 in. (30 mm)

Weight

14.6 oz (415 g)

Compliance


Regulatory Model: M202404001


FCC Part 15 Class B, IC Class B, CE, UL® Listed for US and Canada/Intertek®

Notes:

1. Web browsing, weather information, and certain other functions require an internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. Room scheduling mode requires the TSS-880-GV to be designated exclusively for room scheduling use, which precludes use of certain features and functions described in this spec sheet. Additionally, CollegeNET® 25Live® scheduling software and Ad Astra™ software do not support scheduling ad hoc meetings from the touch screen. For design assistance, contact the Crestron True Blue support team at www.crestron.com/support.
4. Refer to the firmware release notes for a list of all scheduling apps that are supported by that firmware release.
5. Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services. Third party apps typically run on the TSS-880-GV as they do on a tablet device. The TSS-880-GV runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron can run on the TSS-880-GV.

Dimension Drawings

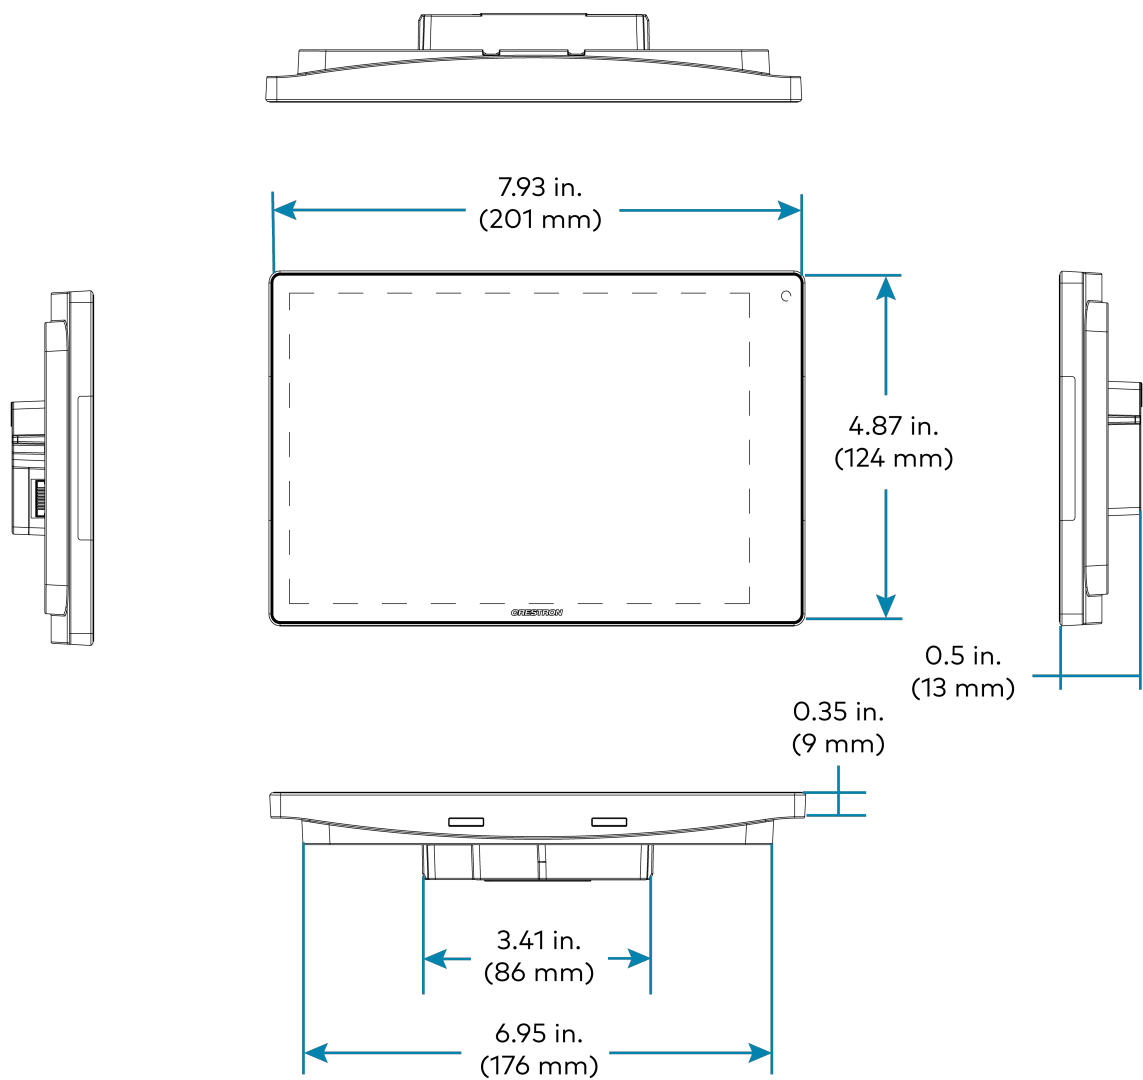

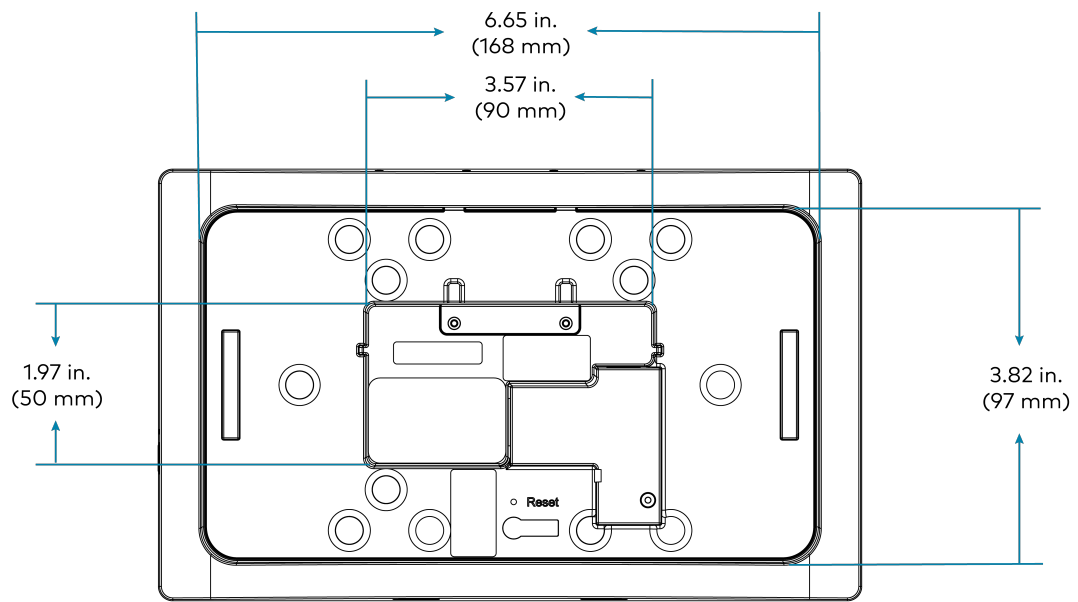

TSS-1080 Specifications

Product specifications for the TSS-1080 are provided below.

Product Specifications

Touch Screen Display

Display Type	TFT active matrix color LCD
Size	10.1 in. (257 mm) diagonal
Aspect Ratio	16:10 WXGA
Resolution	1920 x 1200 pixels
Brightness	Minimum: 350 nits (cd/m ²) Maximum: 400 nits (cd/m ²)
Contrast	1000:1
Color Depth	24 bit, 16.7M colors
Illumination	Edgelit LED with auto brightness control
Viewing Angle	±80° horizontal, ±80° vertical
Touch Screen	Projected capacitive, 5 point multitouch capable

Buttons

Virtual Buttons	(6) Virtual buttons in collapsible universal tool bar, per button show/hide, preconfigured with icons for Power, Home, Lights, Up, Down, and Microphone
Reset	(1) Pin hole on bottom for hardware reset

Room Scheduling Support

Crestron Scheduling App	Microsoft Exchange Server® and Microsoft 365® software, Google Calendar™ calendaring app and G Suite™ software, CollegeNET® 25Live® software, and Ad Astra™ software
Third-Party Apps	Includes support for various third-party scheduling applications. ^{3,4,5}

Memory

RAM	8GB LPDDR4
Storage	40GB eMMC pSLC
Maximum Project Size	1000 MB

Wired Communications

Ethernet	1000Mbps, autoswitching, autonegotiating, autodiscovery, full/half duplex, TCP/IP, UDP/IP, CIP, DHCP, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1X, SNMP, IPv4 or IPv6, Active Directory® service authentication, HTTPS web browser setup, XiO Cloud® client, IEEE 802.3 at compliant
USB	USB 2.0 host for room scheduling accessories

Wireless Communications

Transceiver	IEEE 802.11a/b/g/n/ac/ax Wi-Fi 6E (2.4, 5 GHz and 6GHz) 2x2 MIMO, static IP or dynamic IP via DHCP
Security	64 and 128-bit WEP, WPA, WPA2, WPA3, WPA Enterprise and WPA2 Enterprise
Range	Up to 50 ft (15 m), subject to site-specific conditions
Bluetooth® Hardware	Crestron Bluetooth beacon
Radio Frequency (RF) signals	Proximity sensor (Japan): 60.5 to 61 GHz Proximity sensor (Worldwide): 61 to 61.5 GHz

Streaming Decoder

Video Formats	H.265, H.264, MJPEG
Audio Formats	AAC Stereo
Bitrates	Up to 25 Mbps (20 Mbps maximum recommended)
Input Resolutions	Up to 3840x2160@30fps
Protocol	RTSP

Audio

Features	Built-in speakers
-----------------	-------------------

Connectors

LAN PoE	(1) 8-pin RJ-45 connector, female, with 2 LED indicators; 1000BASE-TX Ethernet port; PoE+ PD port; Green and yellow LEDs indicate Ethernet port status
USB	(1) USB Type C connector, female; USB 2.0 host port

Power

PoE (Power over Ethernet)	IEEE 802.3at Type 2 compliant PoE+ PD (Powered Device); Requests 30 W (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP; Requests 15.4 W (PoE Class 0) from an 802.3af (or 802.3at Type 1)
----------------------------------	---

NOTE: Enabling the USB port requires use of an 802.3 at Type 2 PoE+ PSE.

Environmental

Temperature	32 to 104°F (0 to 40°C)
Humidity	10% to 95% RH (noncondensing)
Heat Dissipation	44 BTU/hr

Construction

Housing	ABS plastic housing, smooth black or white finish, glass with black or white surround
Mounting	Surface mount over a 2 or 3-gang US electrical box, 2-gang European (DIN 49073) electrical box, or 2-gang UK (BS 4662) electrical box; Lectern mount over a 2 in. H x 3-3/4 in. W (51 mm H x 96 mm W) cutout; 1-3/8 in. (35 mm) minimum mounting depth; Wall mount, surface mount, and rack options available separately

Dimensions

Height	5.96 in. (151 mm)
Width	9.68 in. (245 mm)
Depth	1.18 in. (30 mm)

Weight

1.27 lb (20.45 oz)

Compliance

Regulatory Model: M202404002


FCC Part 15 Class B, IC Class B, CE, UL® Listed for US and Canada/Intertek®


Notes:

1. Web browsing, weather information, and certain other functions require an internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. Room scheduling mode requires the TSS-1080 to be designated exclusively for room scheduling use, which precludes use of certain features and functions described in this spec sheet. Additionally, CollegeNET® 25Live® scheduling software and Ad Astra™ software do not support scheduling ad hoc meetings from the touch screen. For design assistance, contact the Crestron True Blue support team at www.crestron.com/support.
4. Refer to the firmware release notes for a list of all scheduling apps that are supported by that firmware release.

5. Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services. Third party apps typically run on the TSS-1080 as they do on a tablet device. The TSS-1080 runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron can run on the TSS-1080.

Dimension Drawings

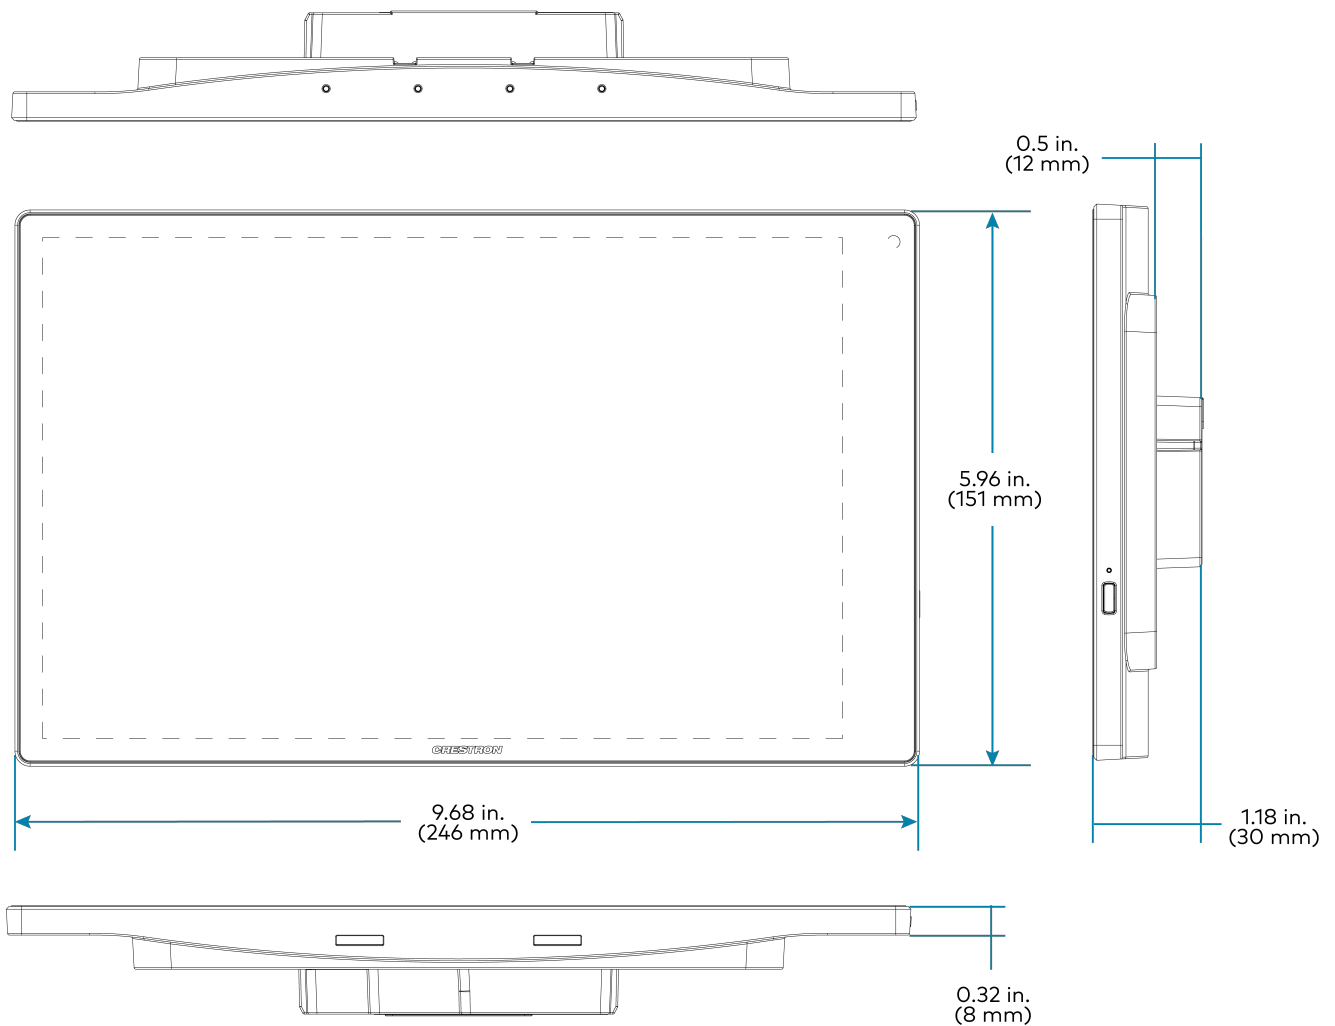

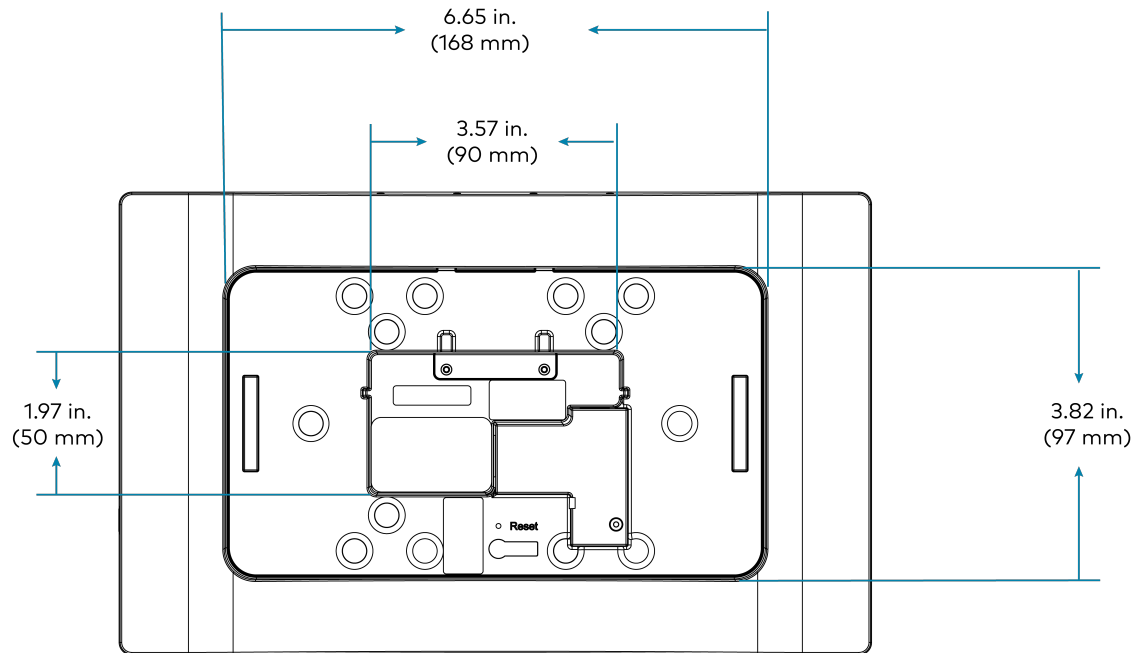

TSS-1080-GV-B Specifications

Product specifications for the TSS-1080-GV-B are provided below.

Product Specifications

Touch Screen Display

Display Type	TFT active matrix color LCD
Size	10.1 in. (257 mm) diagonal
Aspect Ratio	16:10 WXGA
Resolution	1920 x 1200 pixels
Brightness	Minimum: 350 nits (cd/m ²) Maximum: 400 nits (cd/m ²)
Contrast	1000:1
Color Depth	24 bit, 16.7M colors
Illumination	Edgelit LED with auto brightness control
Viewing Angle	±80° horizontal, ±80° vertical
Touch Screen	Projected capacitive, 5 point multitouch capable

Buttons

Virtual Buttons	(6) Virtual buttons in collapsible universal tool bar, per button show/hide, preconfigured with icons for Power, Home, Lights, Up, Down, and Microphone
Reset	(1) Pin hole on bottom for hardware reset

Room Scheduling Support

Crestron Scheduling App	Microsoft Exchange Server® and Microsoft 365® software, Google Calendar™ calendaring app and G Suite™ software, CollegeNET® 25Live® software, and Ad Astra™ software
Third-Party Apps	Includes support for various third-party scheduling applications. ^{3,4,5}

Memory

RAM	8GB LPDDR4
Storage	40GB eMMC pSLC
Maximum Project Size	1000 MB

Wired Communications

Ethernet	1000Mbps, autoswitching, autonegotiating, autodiscovery, full/half duplex, TCP/IP, UDP/IP, CIP, DHCP, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1X, SNMP, IPv4 or IPv6, Active Directory® service authentication, HTTPS web browser setup, XiO Cloud® client, IEEE 802.3 at compliant
USB	USB 2.0 host for room scheduling accessories

Streaming Decoder

Video Formats	H.265, H.264, MJPEG
Audio Formats	AAC Stereo
Bitrates	Up to 25 Mbps (20 Mbps maximum recommended)
Input Resolutions	Up to 3840x2160@30fps
Protocol	RTSP

Audio

Features	Built-in speakers
-----------------	-------------------

Connectors

LAN PoE	(1) 8-pin RJ-45 connector, female, with 2 LED indicators; 1000BASE-TX Ethernet port; PoE+ PD port; Green and yellow LEDs indicate Ethernet port status
USB	(1) USB Type C connector, female; USB 2.0 host port

Power

PoE (Power over Ethernet)	IEEE 802.3at Type 2 compliant PoE+ PD (Powered Device); Requests 30 W (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP; Requests 15.4 W (PoE Class 0) from an 802.3af (or 802.3at Type 1)
----------------------------------	---

NOTE: Enabling the USB port requires use of an 802.3 at Type 2 PoE+ PSE.

Environmental

Temperature	32 to 104°F (0 to 40°C)
Humidity	10% to 95% RH (noncondensing)
Heat Dissipation	44 BTU/hr

Construction

Housing	ABS plastic housing, smooth black or white finish, glass with black or white surround
Mounting	Surface mount over a 2 or 3-gang US electrical box, 2-gang European (DIN 49073) electrical box, or 2-gang UK (BS 4662) electrical box; Lectern mount over a 2 in. H x 3-3/4 in. W (51 mm H x 96 mm W) cutout; 1-3/8 in. (35 mm) minimum mounting depth; Wall mount, surface mount, and rack options available separately

Dimensions

Height	5.96 in. (151 mm)
Width	9.68 in. (245 mm)
Depth	1.18 in. (30 mm)

Weight

1.27 lb (20.45 oz)

Compliance


Regulatory Model: M202404002


FCC Part 15 Class B, IC Class B, CE, UL® Listed for US and Canada/Intertek®

Notes:

1. Web browsing, weather information, and certain other functions require an internet connection.
2. Item(s) sold separately. Refer to each product's spec sheet for complete information.
3. Room scheduling mode requires the TSS-1080-GV to be designated exclusively for room scheduling use, which precludes use of certain features and functions described in this spec sheet. Additionally, CollegeNET® 25Live® scheduling software and Ad Astra™ software do not support scheduling ad hoc meetings from the touch screen. For design assistance, contact the Crestron True Blue support team at www.crestron.com/support.
4. Refer to the firmware release notes for a list of all scheduling apps that are supported by that firmware release.
5. Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services. Third party apps typically run on the TSS-1080-GV as they do on a tablet device. The TSS-1080-GV runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron can run on the TSS-1080-GV.

Dimension Drawings

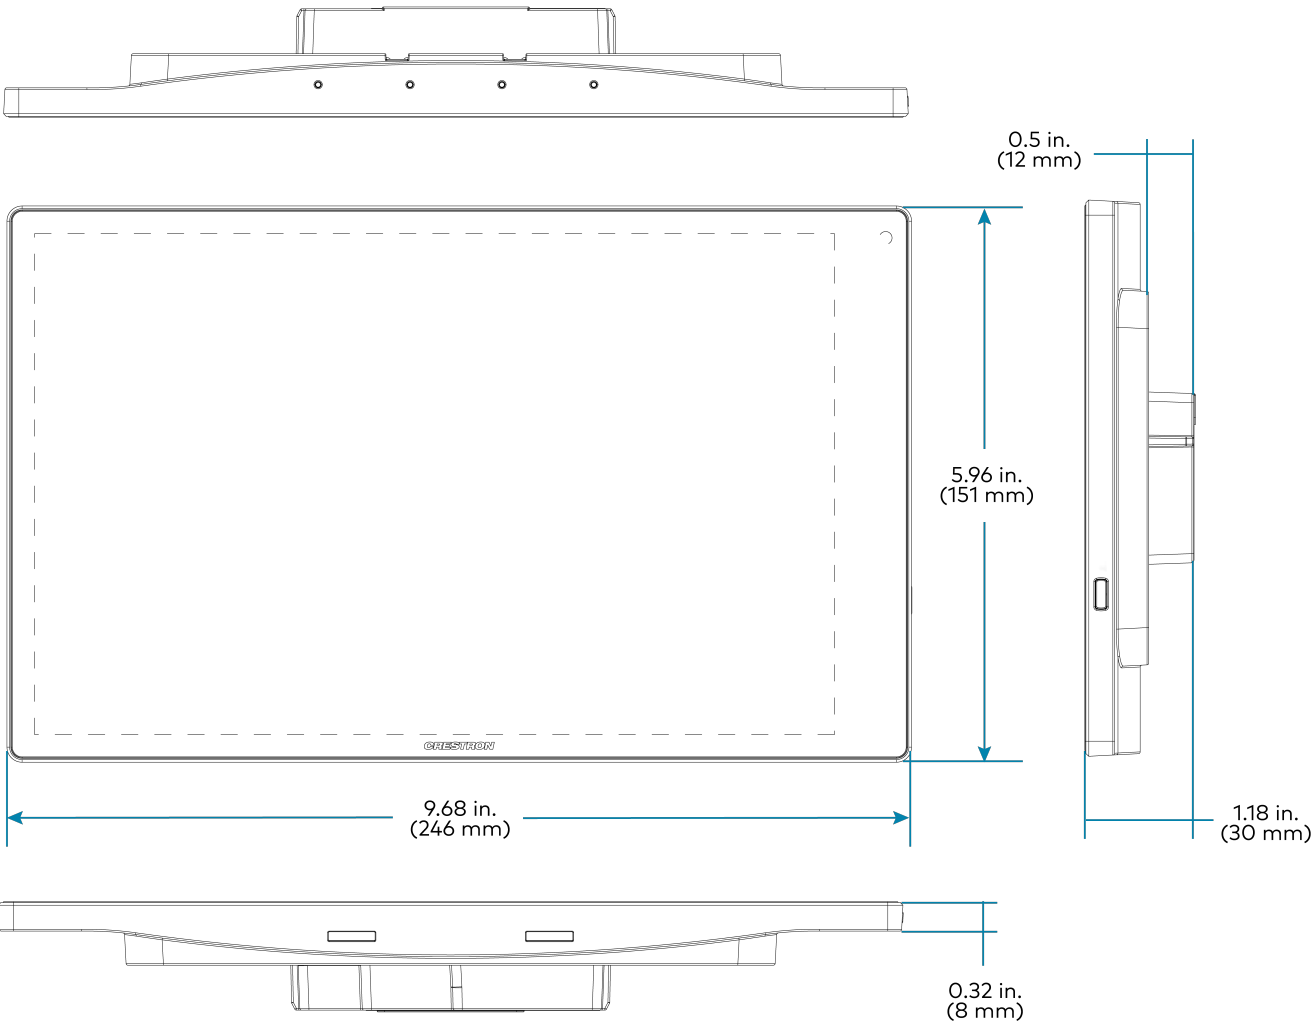

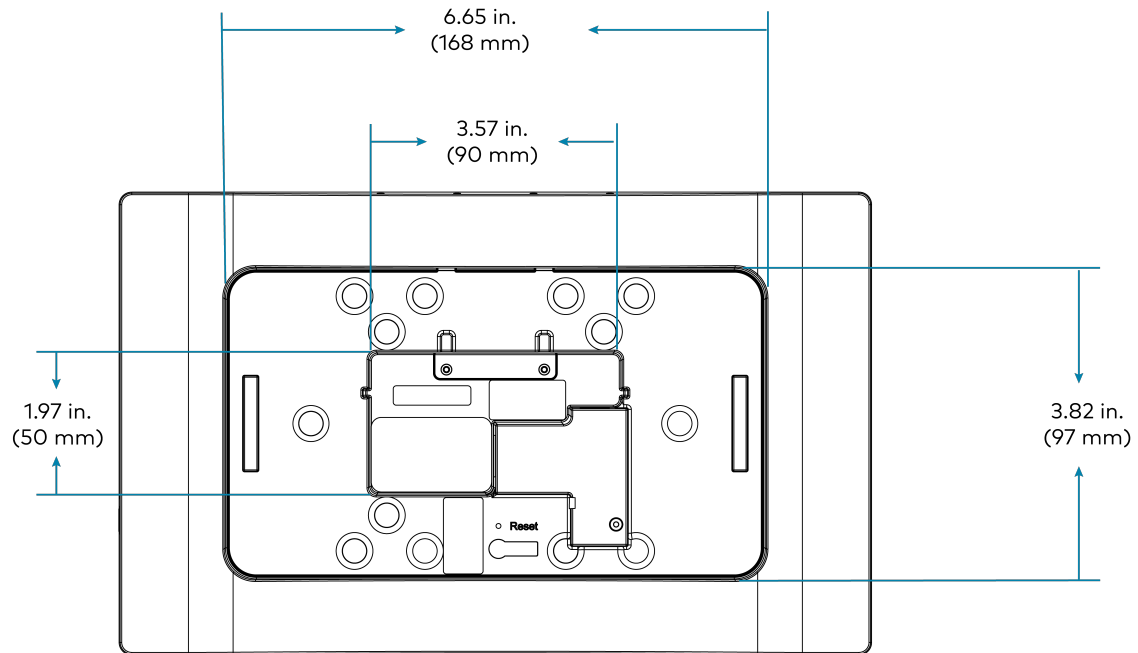

Getting Started

This section provides structured entry points for initial use of the touch screen. Refer to the below sections for more information on out of the box set up, installation, or web and local configuration.

Installation

For information on installing the touch screen and its mounting accessories, refer to [Installation on page 47](#).

Initial Setup

For information on setting up the touch screen before use, refer to [Initial Setup on page 93](#).

Web Configuration

For information on configuring the touch screen via its web configuration interface, refer to [Web Configuration on page 101](#).

Local Configuration

For information on configurations using the touch screen display, refer to [Local Configuration on page 146](#).

Installation

This section provides the following information:

- [TSS-80 Installation](#)
- [TSW-880-1080-MSMK-ANG Installation](#)
- [TSW-880/1080-MSMK Installation](#)
- [TSW-880-1080-MUMK Installation](#)
- [TSW-UMB-80 Installation](#)
- [TSW-UMB-80-BBI Installation](#)
- [TSW-UMB-U-PMK Installation](#)
- [TSW-RMB Installation](#)
- [TSW-RMK Installation](#)

TSS-80 Installation

Use the following procedures to install the TSS-80 and TSS-1080.

In the Box

Qty.	Description
1	TSS-880 or TSS-1080, Room Scheduling Touch Screens
Additional Items	
1	Wall Mounting Bracket, Metal, 880/1080 (2063955)
1	Security Bracket, Metal, x80 Series (2063966)
1	Security Bracket Key, Metal, x80 Series (2063967)
2	Screw, M2 x 0.4, 4 mm (2055454)
2	Screw, Flat, M3.5 x 25 mm (2023756)
4	Screw, Phillips, 3 x 16 mm (2013788)
4	Screw, Flat, 6-32 x 3/4 in. (2033247)
4	Drywall Anchor, Plastic (2035879)
4	Screw, Flat Head, 6-AB, 1 in. (2056874)

Install the Mounting Bracket

The TSS-80 touch screens install over a standard 2-gang or 3-gang U.S. electrical box, a 2-gang European electrical box, or a 2-gang U.K. electrical box. The touch screen also installs into drywall.

Notes:


- Additional mounting options are possible using the following mounting accessories. For more information, refer to the product pages at www.crestron.com.
 - [TSW-UMB-80](#) universal mounting bracket
 - [TSW-UMB-U-PMK](#) preconstruction mounting kit
 - [TSW-UMB-80-BBI](#) wall mount back box
 - [TSW-880/1080-MSMK](#) series multisurface mounting kits
 - [TSW-880/1080-MSMK-ANG](#) series angled multisurface mount kits
 - [TSW-880/1080-MUMK](#) mullion mounting kit
- Installing the mounting bracket to an electrical box is required only if one of the mounting solutions above is not used.

Electrical Box Mounting


To mount the touch screen into an electrical box, use the appropriate screws (four 6-32 x 3/4 in. screws, four M3 x 16 mm screws, or two M3.5 x 25 mm screws) to attach the mounting bracket to the electrical box.

Note: For U.S. installations, use a #2 Phillips screwdriver. For European or U.K. installations, use a #1 Phillips screwdriver.

For U.S. installations, use the four 6-32 x 3/4 in. screws:

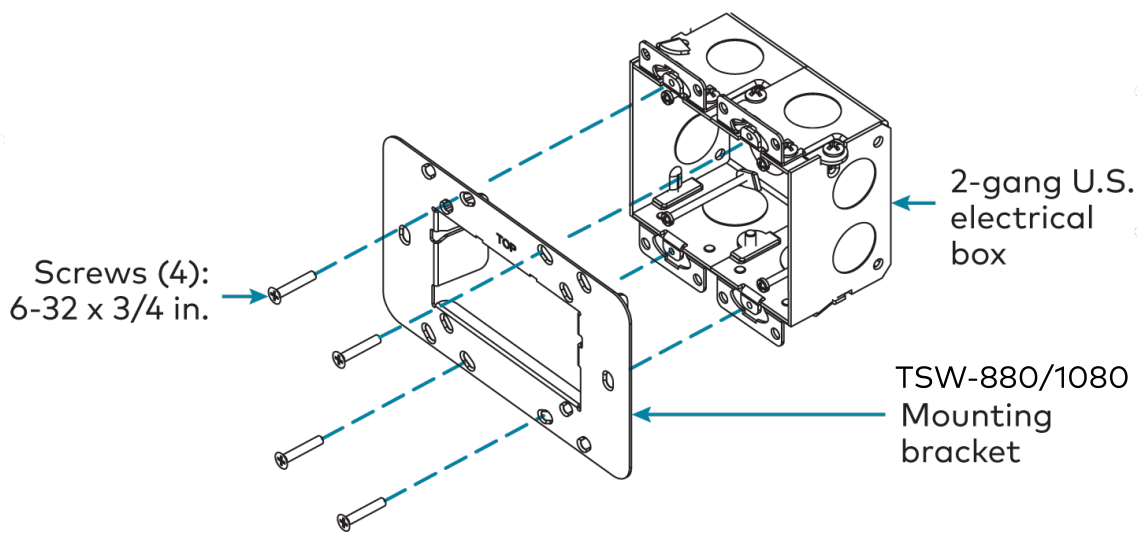

For European installations, use the four M3 x 16 mm screws:

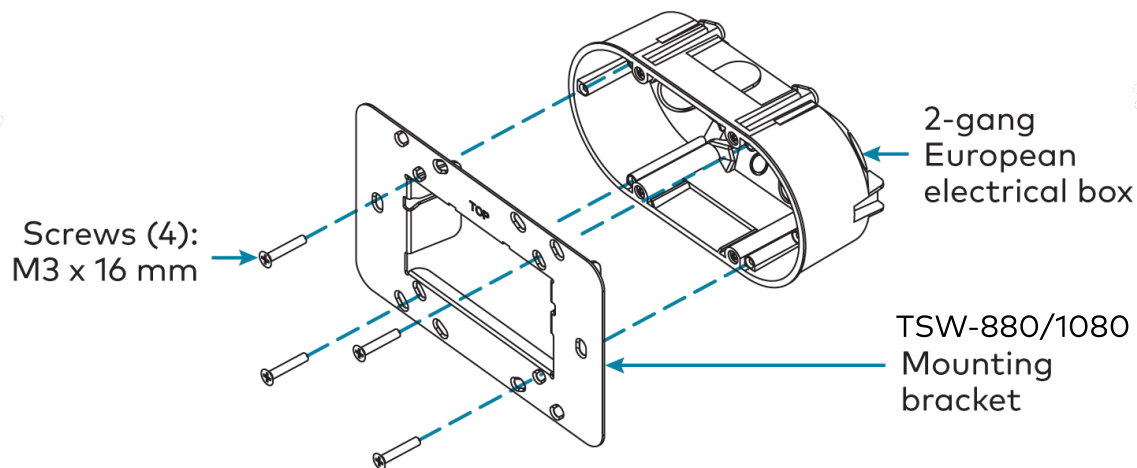


For U.K. installations, use the two M3.5 x 25 mm screws to attach the mounting bracket to the electrical box. Insert the screws through the center openings in the left and right sides of the mounting bracket.

Drywall Mounting

Mounting hardware is provided with the touch screen for drywall installations without an electrical box. Using this hardware will ensure that the bracket is completely flush with the touch screen to provide maximum magnetic force.


To install the mounting bracket into drywall:

1. Using the inside of the mounting bracket as a template, cut a 2-1/8 x 3-5/8 in. (54 x 92 mm) hole into the drywall. Ensure the template is level prior to cutting the hole.
2. Align the mounting bracket with the cutout and ensure it is level.
3. Use one of the anchors to make a center mark in the drywall through the four 2-gang openings in the template. Refer to the image below for the required mounting holes.
4. Screw the four anchors into the drywall using the center marks as a reference.
5. Attach the mounting bracket to the anchors using the four 6-AB x 1 in. screws as shown in the image below.

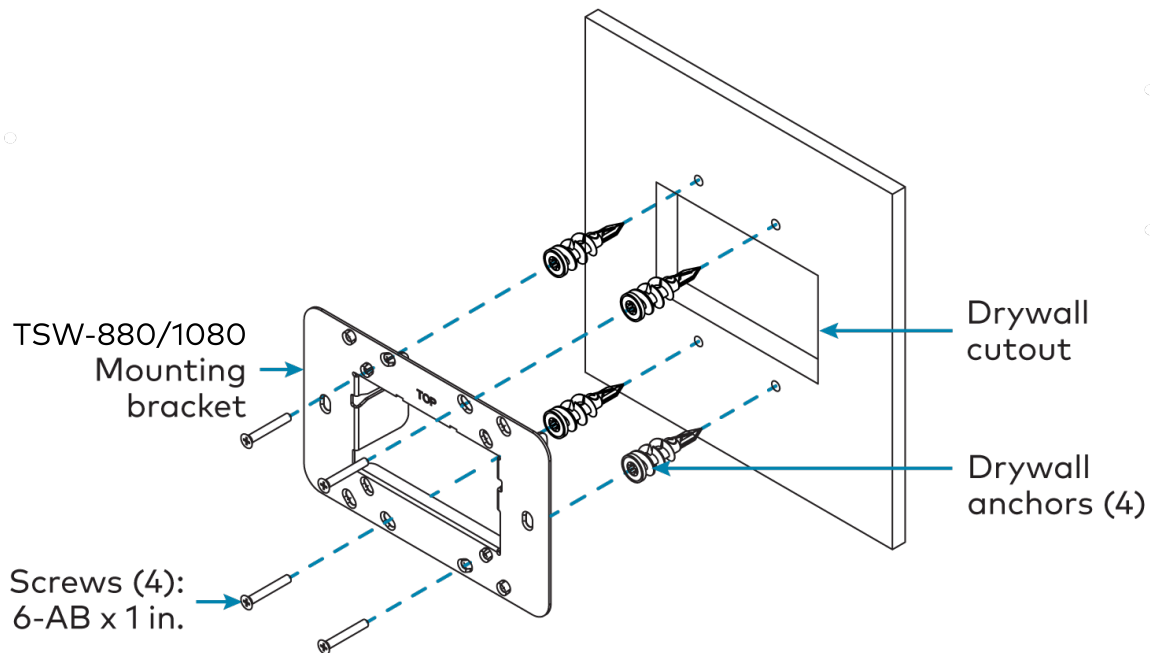

Connect the Touch Screen

Route all necessary cables through the rear of the mounting bracket, and then make connections to the side of the touch screen rear housing.

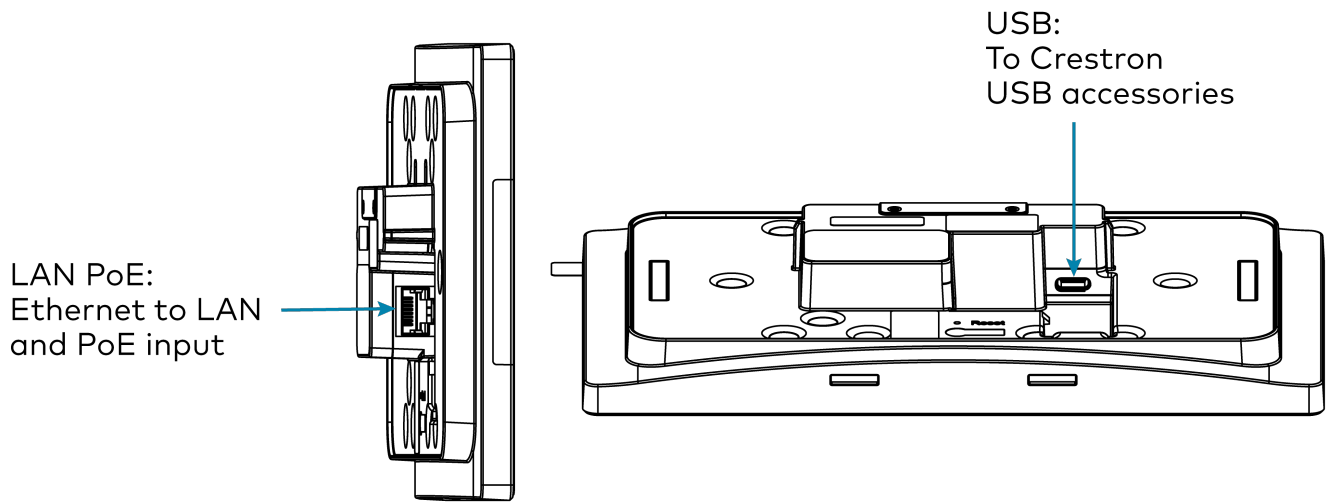

Observe the following when connecting the touch screen:


- Power and data connection is provided to the touch screen by a single Ethernet cable. A Crestron PoE (Power over Ethernet) power supply or a PoE-capable network switch is recommended (neither included). Refer to the full list of supported PoE switches [here](#).
- The USB ports are used to connect compatible Crestron LED accessories to the touch screen.

NOTE: Enabling the USB port requires use of an 802.3 at Type 2 PoE+ PSE.

- Apply power after all connections have been made.

Mount the Touch Screen

After all connections have been made, push the touch screen gently into the mounting bracket so that its rear housing is secured within the center opening of the mounting bracket.

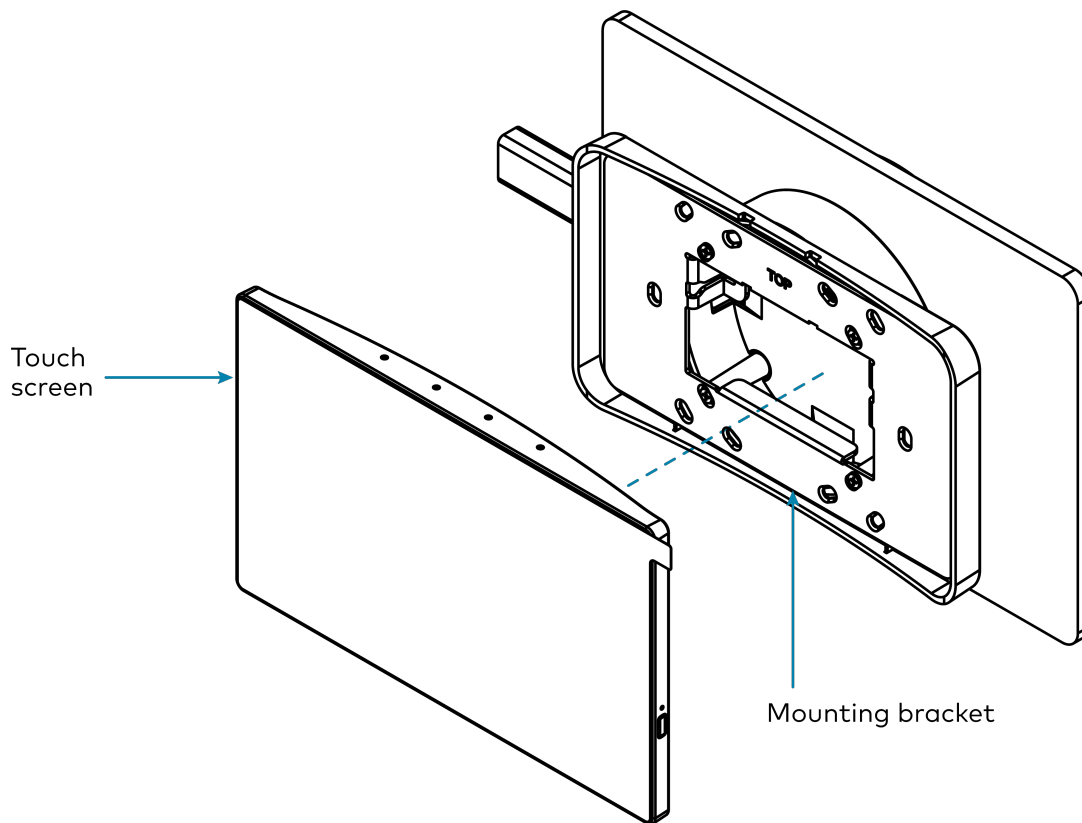

If the touch screen is not level after installation, pull it out of the mounting bracket and loosen the screws holding the bracket into place. This procedure allows the mounting bracket to be rotated slightly. Once the mounting bracket has been repositioned, tighten the screws, reinstall the touch screen into the bracket, and ensure that the touch screen is now level.

NOTE: To clean or disinfect a touch screen display, use a soft, clean, damp (not wet) cloth with any commercially available non-ammonia glass cleaner or disinfectant cleaner. Bezels do not provide a complete watertight seal, so apply cleaning solution to the cloth rather than the surface of the touch screen. Wipe the touch screen clean and avoid ingress of moisture beneath the bezels.

TSW-880-1080-MSMK-ANG Installation

The TSW-880/1080-MSMK-ANG provides the touch screen with the capability to be mounted directly to glass, granite, marble, wood paneling, plaster, smooth masonry, or virtually any other flat surface.

In the Box

Qty.	Description
1	TSW-880/1080-MSMK-ANG, Angled Multisurface Mount Kit for TSW-880 and TSW-1080 Series
Additional Items	
1	Angled Bracket, Plastic Assembly (4537760)
2	Screw, 6-32 x 3/8 in. (2013475)
2	Screw, 6-32 x 3/4 in. (2033247)
4	Screw, 6-32 x 1 in. (2007251)
6	Screw, 6-32 x 1/2 in. (2007240)
4	Screw, M3 x 25 mm (2049589)
2	Screw, M3.5 x 25 mm (2049591)
4	Washer, #6 (2007663)


TSW-880/1080-MSMK-ANG Mounting Instructions

The TSW-880/1080-MSMK-ANG can be installed over an electrical box, into drywall, or onto a flat, smooth surface. Procedures for each installation are provided in the sections that follow.

Drywall Mounting


1. Choose a mounting location that is free of any wiring, studs, or other obstructions. Make a small hole in the surface near the center of the chosen location to verify that it is suitable for mounting.
2. Create a cutout in the drywall where the touch screen will be installed for routing cables.
3. Route all necessary cables through the drywall cutout.
4. Attach the MSMK-ANG to the drywall surface using four standard dry wall anchors and 6-AB x 1 in. drywall screws (not included).

5. Attach the TSW-80 mounting bracket (provided with the touch screen) to the angled bracket using the two provided 6-32 x 3/8 in. screws. Ensure the bracket is level after installation. Refer to [TSW-880 and TSW-1080 Installation](#) for more information.

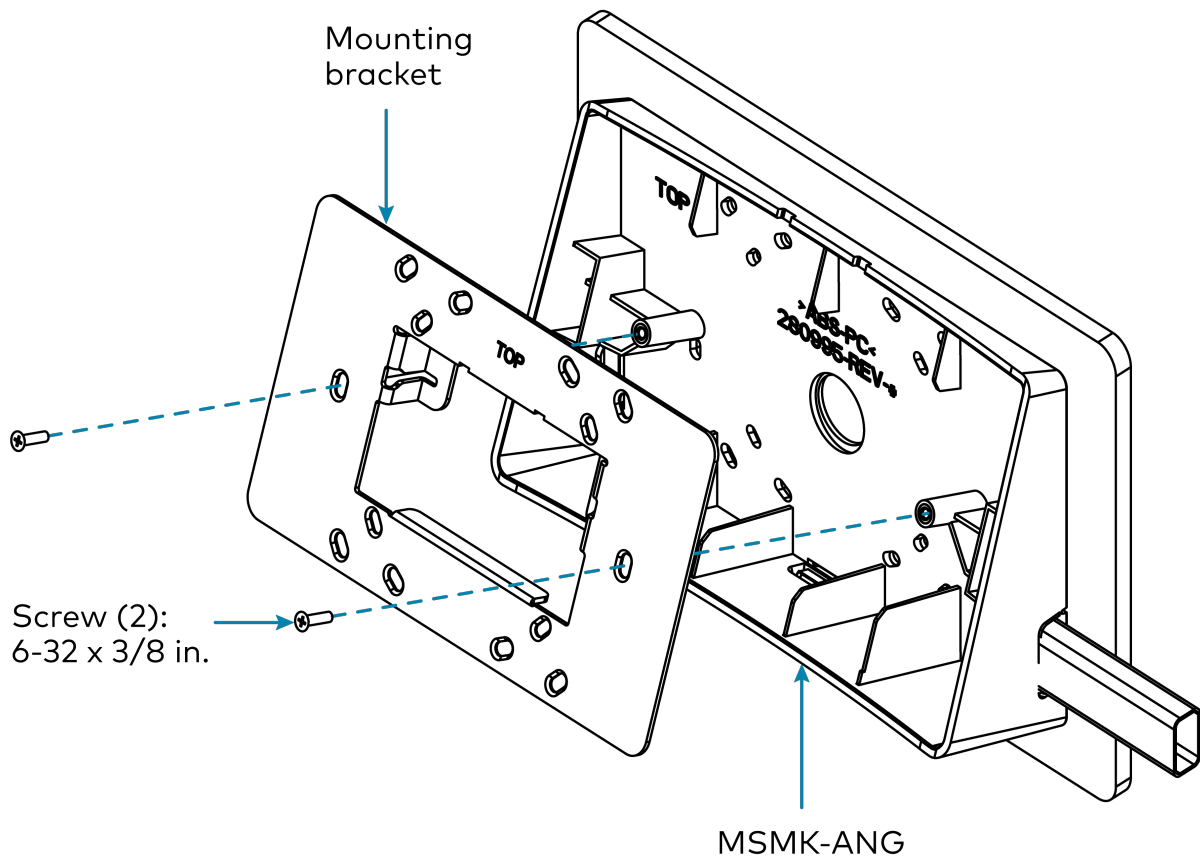

6. Route all cables out of the center opening in the angled bracket and connect them to the rear of the touch screen.

7. After all connections have been made, hold the touch screen over the mounting plate and place it gently in position so that it attaches securely to the plate.

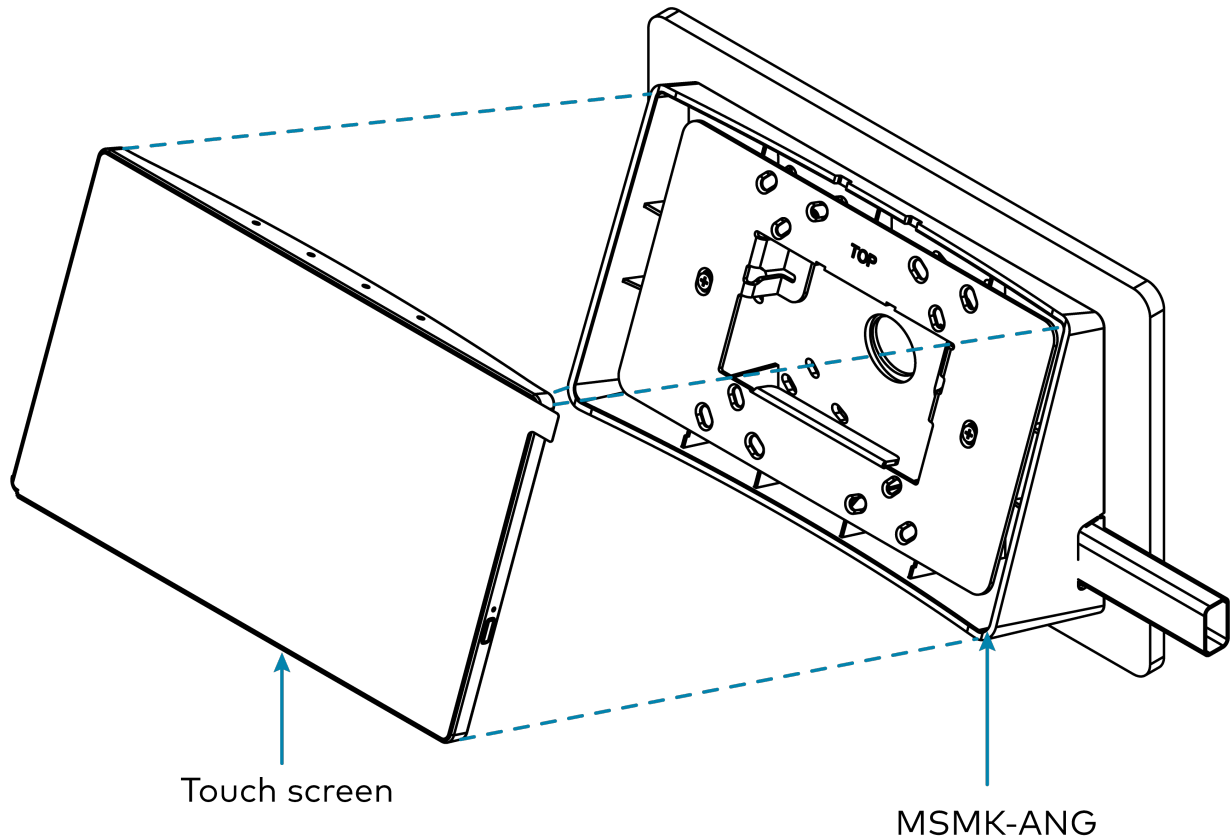

Surface Mounting

Use the following procedures to mount the MSMK onto a flat pane of glass or a similar smooth surface (such as granite, marble, plaster, or smooth stone and masonry).

CAUTION: Observe the following points to ensure the MSMK-ANG properly bonds to the mounting surface. Failure to properly bond the MSMK-ANG to the mounting surface could cause it to detach after installation.

- Use isopropyl alcohol (minimum 70%) to clean the mounting surface. Other surface cleaning products can leave a film that will prevent the adhesive from properly bonding to the mounting surface.
- Use a new, clean nonlinting cloth to apply the isopropyl alcohol. The cloth should not have been used with any other cleaning product to ensure that it does not leave a film on the mounting surface.
- Allow the isopropyl alcohol to air dry on the mounting surface for at least one minute before applying adhesive. Do not dry the surface with a cloth prior to applying adhesive.
- Do not apply adhesive to the mounting surface in temperatures below 65°F (19°C).

- When mounting on glass surface, make sure the glass does not have any coating or film application.


NOTE: The following is not included and required for this installation: a level, masking tape, a Phillips screwdriver, and isoprophyl alcohol.

1. Select a mounting location for the MSMK and determine whether the raceway (not included) will be entering the MSMK from the top, bottom, left, or right cutout.
2. Use pliers (or a similar tool) to break away the appropriate knockout on the left, right, or bottom of the angled bracket for running cables to the touch screen.
3. Clean and dry the mounting surface thoroughly.
4. Using the level, tape a horizontal reference line on the glass surface that aligns with the lower edge of the angled bracket. Ensure the reference line is level before proceeding.
5. Remove the protective backing from the adhesive pad attached to the angled bracket.
6. Hold the angled bracket at a 45-degree angle to the glass surface, and then align the lower edge of the bracket with the taped reference line. Do not allow the adhesive to come in contact with the glass surface yet.

7. Once the angled bracket is level and aligned with the taped reference line, press the bracket to the mounting surface firmly to ensure proper adhesion and to eliminate any trapped air bubbles. Press and hold the outer edges and interior surfaces of the bracket against the surface for at least 30 seconds to ensure the adhesive bonds to the surface.

CAUTION: Allow a minimum of one hour (or up to 24 hours for maximum hold) for the adhesive to cure to the bracket and surface before installing the touch screen. Failure to properly cure the bracket to the mounting surface could cause the MSMK-ANG to detach after installation.

NOTE: All air bubbles must be smoothed out and eliminated to ensure a complete bond to the surface.

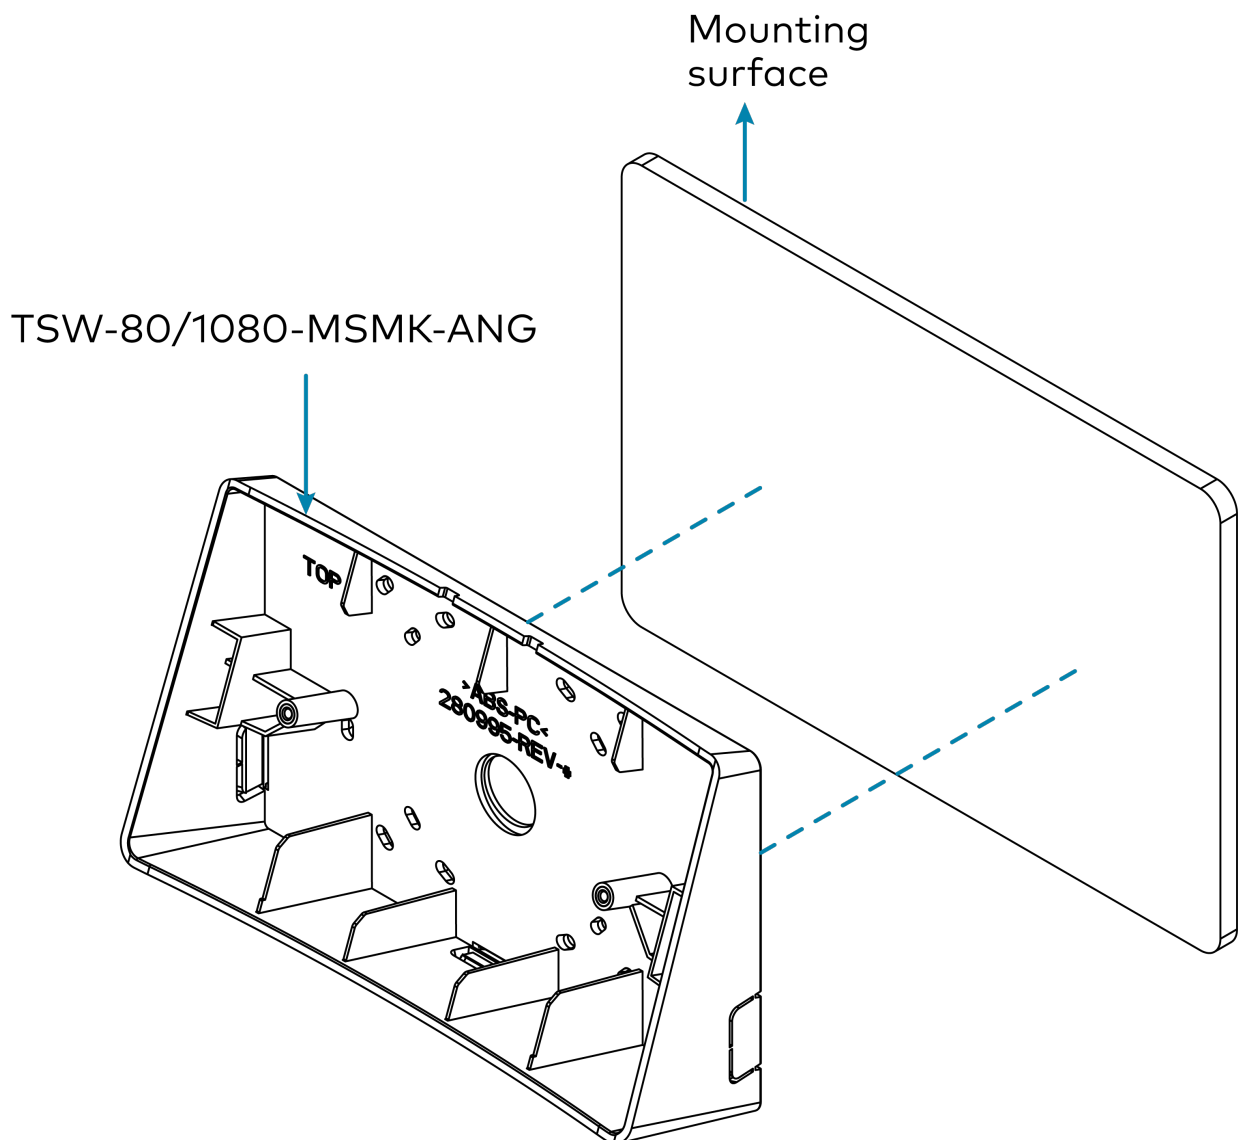


Attach the Touch Screen

1. Remove any existing tape guides and install any raceways (not included) to conceal cables running to the desired knockout on the angled bracket.


NOTE: To ensure the raceway fits into the knockout, Crestron recommends using raceway with the following dimensions: 0.45 H x 0.77 in. W (11 x 20 mm).

2. Attach the mounting bracket to the angled bracket using the two provided 6-32 x 3/8 in. screws. Ensure the bracket is level after installation.

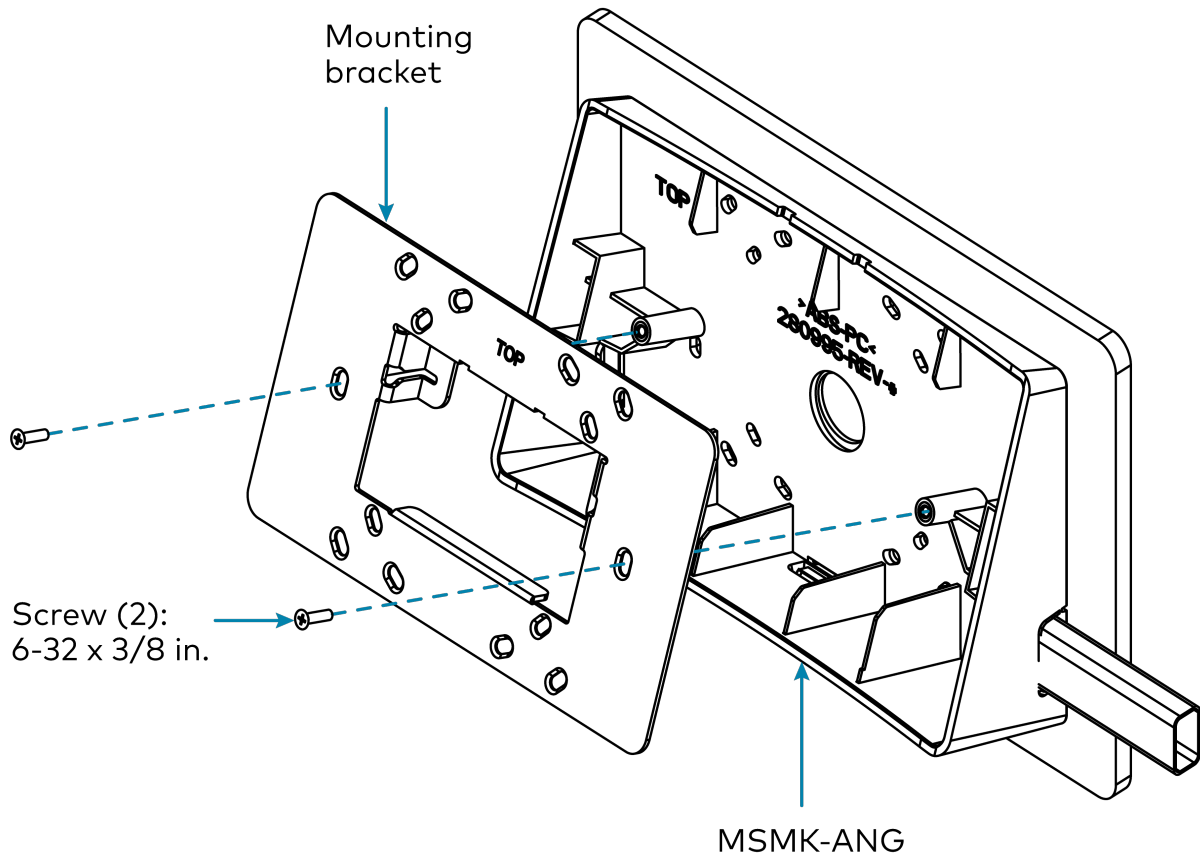

3. Route all cables through the chosen knockout and out of the center opening in the angled bracket, and then connect them to the rear of the touch screen.

4. After all connections have been made, hold the touch screen over the mounting plate and place it gently in position so that it attaches securely to the plate.

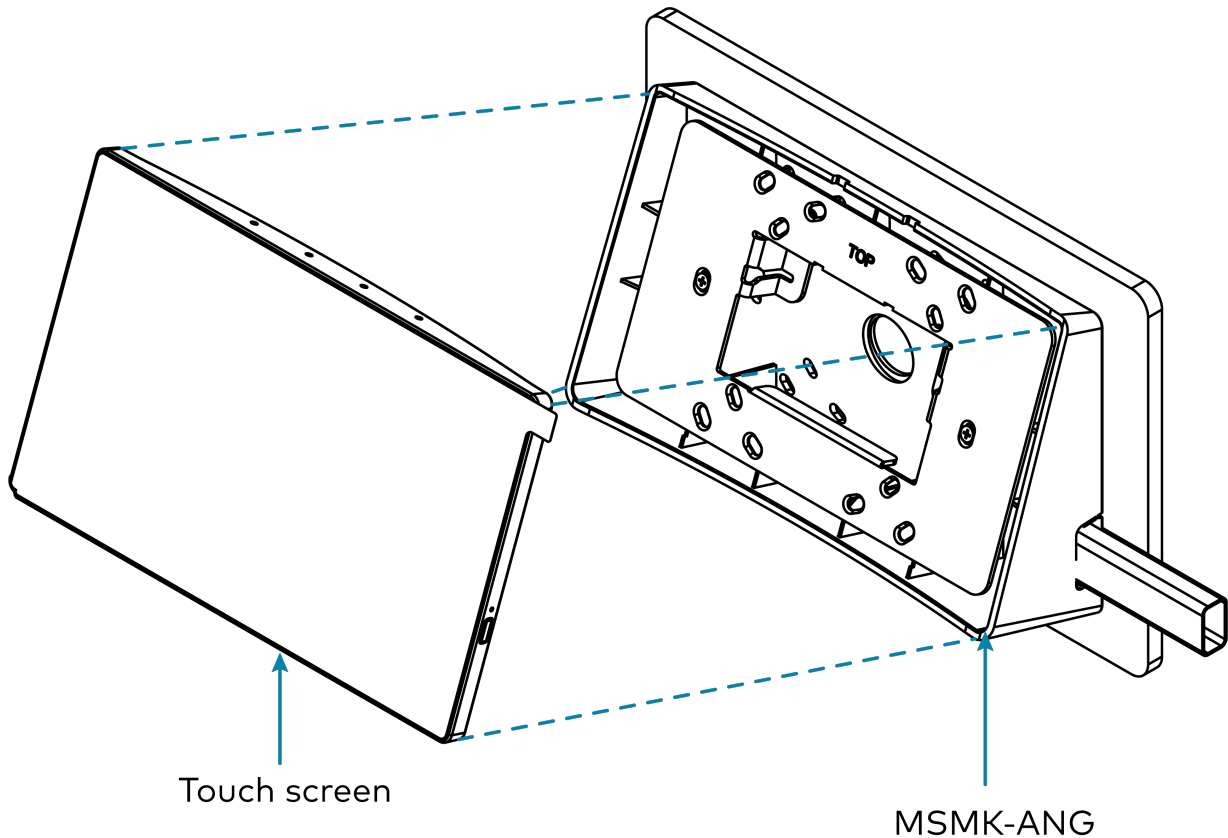

Attach the Label (Optional)

To provide a finished appearance for installations on glass or other transparent surfaces, install the included polycarbonate label on the opposite side of the surface behind the MSMK.


To install the label:

1. Clean and dry the rear of the mounting surface thoroughly. Refer to the caution statements at the beginning of the "Surface Mounting" section for important cleaning and drying notes.
2. Using the level, tape a horizontal reference line on the glass surface that aligns with the lower edge of the angled bracket on the opposite side. Ensure the reference line is level before proceeding.
3. Remove the protective liner from the rear of the label.

CAUTION: The adhesive on the rear of the label is high-strength bond. Once the adhesive comes in contact with a surface, it cannot be removed easily.

4. Hold the label at a 45-degree angle to the angled bracket, and then align the lower edge of the label with the lower edge of the bracket. Do not allow the label adhesive to come in contact with the surface.
5. Once the label is level and aligned with the angled bracket, attach the label to the mounting surface carefully. Press and hold the label against the surface for at least 30 seconds to ensure the adhesive bonds to the surface.

NOTE: All air bubbles must be smoothed out and eliminated to ensure a complete bond to the surface.

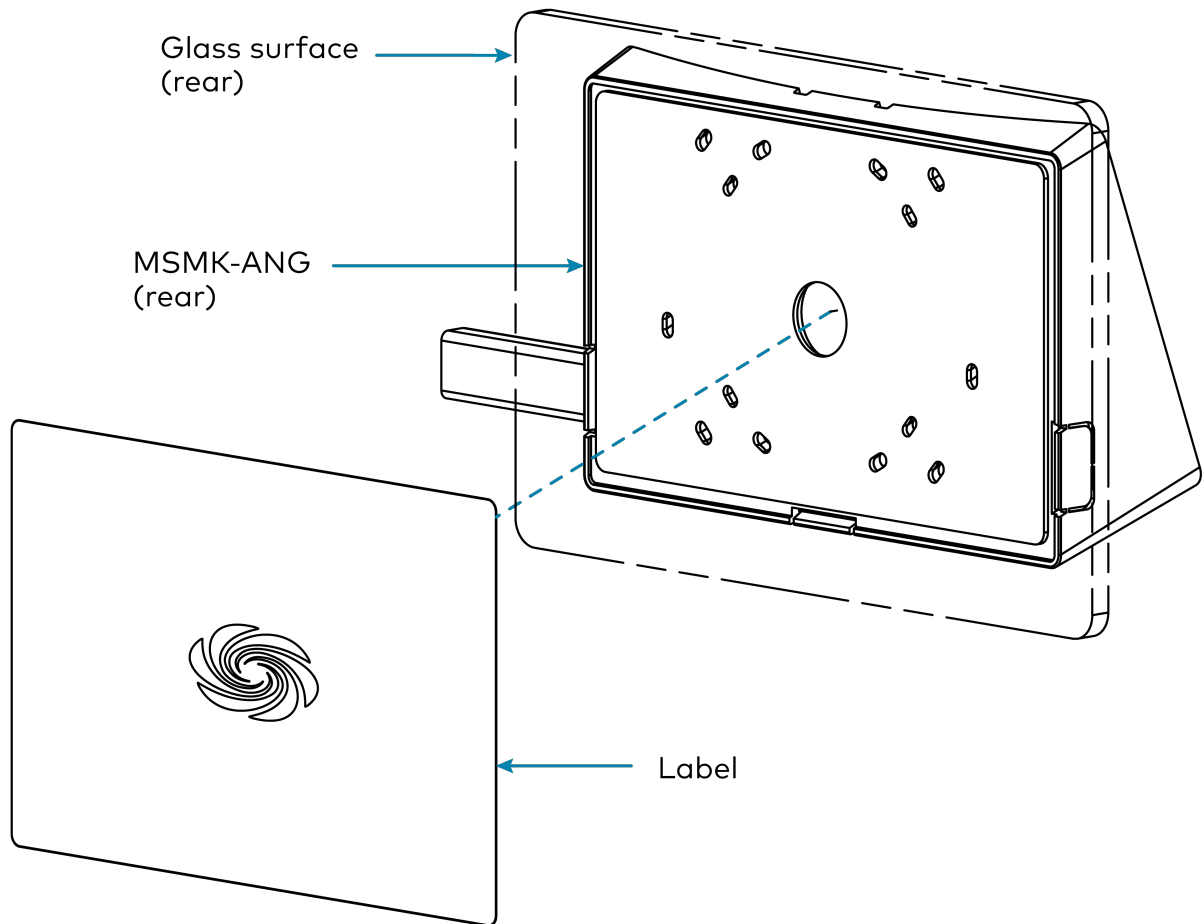

TSW-880/1080-MSMK Installation

The TSW-880/1080-MSMK provides the touch screen with the capability to be mounted directly to glass, granite, marble, wood paneling, plaster, smooth masonry, or virtually any other flat surface.

In the Box

Qty.	Description
1	TSW-880/1080-MSMK, Multisurface Mount Kit for TSW-880 and TSW-1080 Series
Additional Items	
1	Bracket, Plastic Assembly (4538485)
1	Cover, Black Plastic (2063176)
1	Plastic Cap (4538557)
4	Screw, 6-32 x 3/8 in. (2013475)
2	Template, Mounting Overlay (4530855)

TSW-880-1080-MSMK Mounting Instructions

Use the following procedures to mount the TSW-880/1080-MSMK onto a flat surface:

CAUTION: Observe the following points to ensure the TSW-880/1080-MSMK properly bonds to the mounting surface. Failure to properly bond the TSW-880/1080-MSMK to the mounting surface could cause it to detach after installation.

- Use isopropyl alcohol (minimum 70%) to clean the mounting surface. Other surface cleaning products can leave a film that will prevent the adhesive from properly bonding to the mounting surface.
- Use a new, clean nonlinting cloth to apply the isopropyl alcohol. The cloth should not have been used with any other cleaning product to ensure that it does not leave a film on the mounting surface.
- Allow the isopropyl alcohol to air dry on the mounting surface for at least one minute before applying adhesive. Do not dry the surface with a cloth prior to applying adhesive.
- Do not apply adhesive to the mounting surface in temperatures below 65°F (19°C).
- When mounting on glass surface, make sure the glass does not have any coating or film application.

NOTE: The following is not included and required for this installation: a level, masking tape, a Phillips screwdriver, and isopropyl alcohol.

Position the Template

An overlay template is provided to help ensure that it remains level during installation. To position the template:


1. Clean and dry the mounting surface thoroughly as per the caution statement above.
2. Use a level and masking tape to attach the included rear housing template to the chosen mounting surface. Ensure that the template is level before proceeding.

Attach the Housing

To attach the TSW-880/1080-MSMK rear housing to the mounting surface:

1. Place the included plastic cover into the center cutout of the rear housing template. Ensure that the opening in the cover is facing toward the mounting surface.
2. While holding the cover in place, tape the outer ring of the cover to the template.

NOTE: The tape must not be attached to the inner ring or the flat front surface of the plastic cover, as it cannot be removed easily once the rear housing is installed.

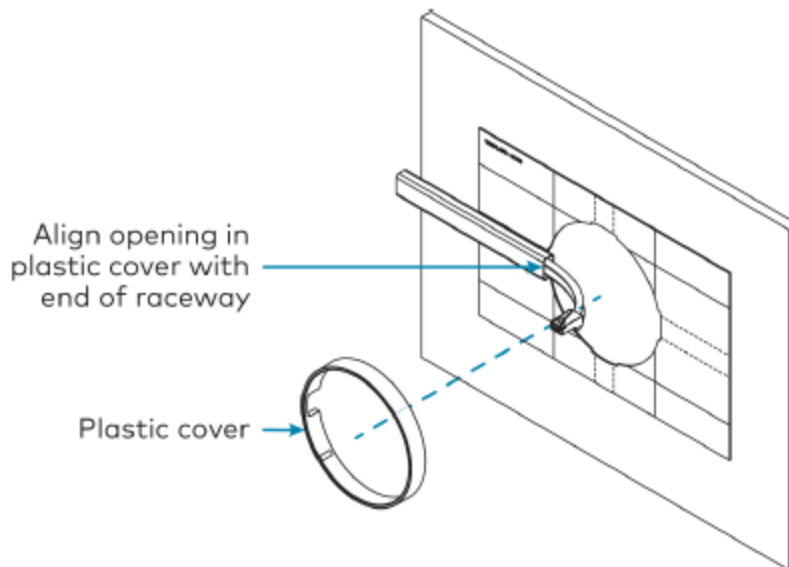

3. Route the cables loosely from the MSMK through the opening in the plastic cover and out of the appropriate cutout (top, bottom, left, or right) of the housing.
4. Remove the protective liner from the back of the housing.
5. Hold the housing at an angle so that the short, straight edge mates with the end of the cutout. Do not allow the adhesive to come in contact with the mounting surface.
6. Slide the circular base of the housing into the plastic cover without allowing the adhesive to come in contact with the surface. Two detents in the plastic cover help to lock the housing into the cover while providing some room for leveling.
7. Place a level on top of the housing.

8. After confirming that the housing is level, press its circular base to the mounting surface firmly for at least 30 seconds to ensure the adhesive bonds to the surface.

CAUTION: Allow a minimum of one hour (or up to 24 hours for maximum hold) for the adhesive to cure to the bracket and surface before installing the touch screen. Failure to properly cure the bracket to the mounting surface could cause the MSMK to detach after installation.


NOTE: All air bubbles must be smoothed out and eliminated to ensure a complete bond to the surface.

Attach the Touch Screen

Attach the TSS-80 or TSW-80 touch screen to the TSW-880/1080-MSMK:


1. Cut the template off of the surface and remove any existing tape guides.
2. Use the included 4-40 x 5/8 in. screws to attach the touch screen to the four screw holes in the rear housing.

NOTE: Use a level to adjust the mounting bracket position to ensure it is centered and level.

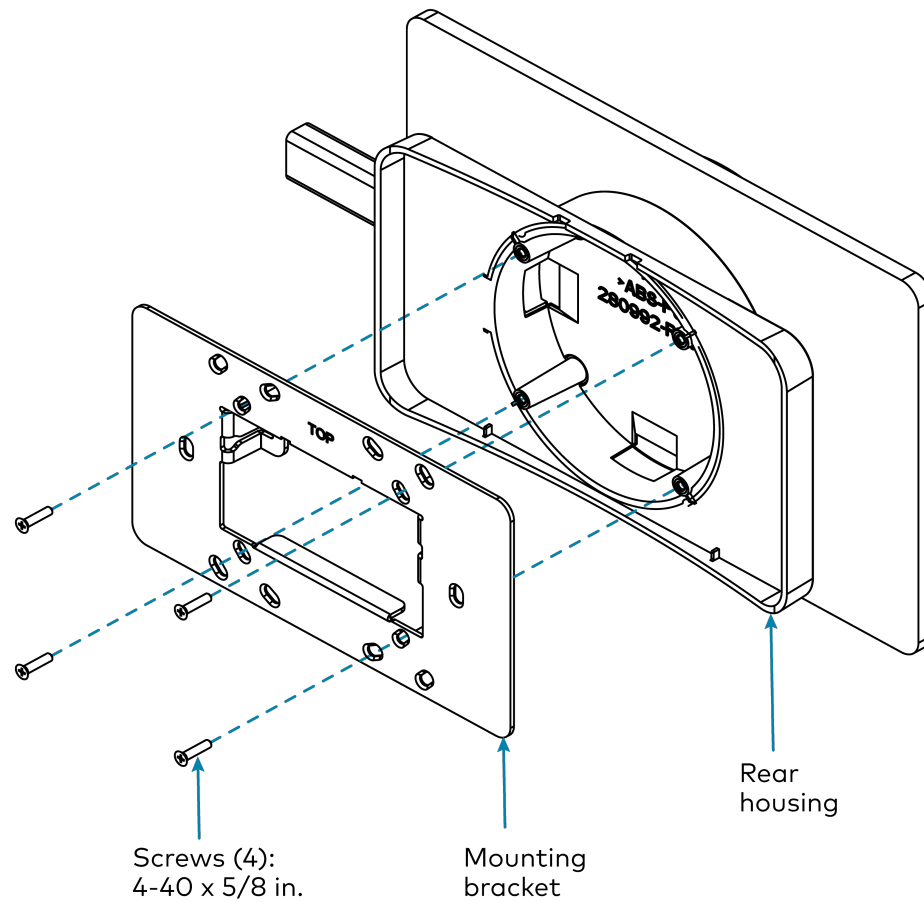

3. Connect all cables to the rear of the touch screen.

4. Push the touch screen gently into the TSW-880/1080-MSMK until the rear of the touch screen snaps into place inside the mounting bracket.

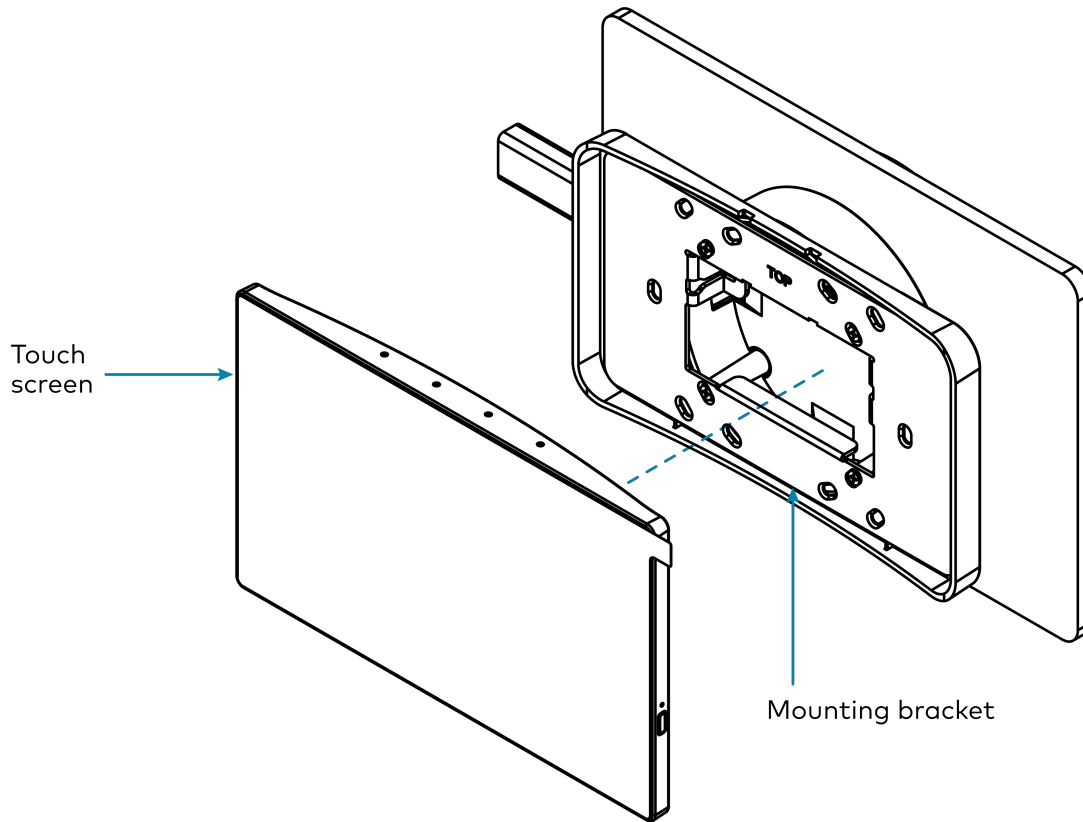

Attach the Plastic Cap (Optional)

To provide a finished appearance for installations on glass or other transparent surfaces, install the included molded plastic cap on the opposite side of the surface behind the MSMK:


1. Clean and dry the rear of the mounting surface thoroughly.
2. Use a level to align the included plastic cap template with the circular base of the mounting bracket on the opposite side of the surface.
3. Tape the plastic cap template to the mounting surface.
4. Remove the protective liner from the rear of the plastic cap.

CAUTION: The adhesive on the rear of the plastic cap is high-strength bond. Once the adhesive comes in contact with a surface, it cannot be removed easily. If the logo on the plastic cap is crooked after installation, it cannot be rotated.

5. Using the overlay template as a guide, hold the plastic cap over the center of the rear housing's circular base, and then align the four dots on the plastic cap with the four lines on the template. Do not allow the adhesive to come in contact with the surface.

6. Attach the plastic cap to the surface, starting with the bottom edge. Press the plastic cap to the surface firmly for at least 30 seconds to ensure the adhesive bonds to the surface.

NOTE: All air bubbles must be smoothed out and eliminated to ensure a complete bond to the surface.

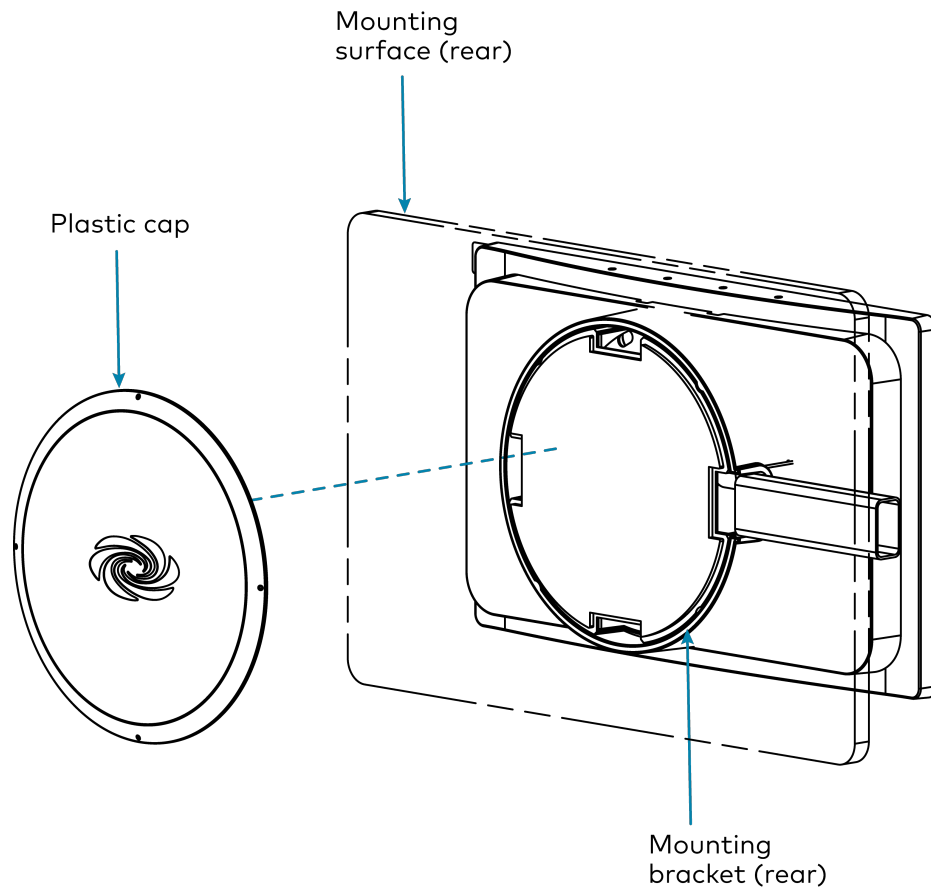

TSW-880-1080-MUMK Installation

The TSW-880/1080-MUMK enables a TSW-80 series touch screen to be attached to the mullion of an interior glass wall, window, or partition.

Refer to the following sections for information on mounting the TSW-880/1080-MUMK.

In the Box

Qty.	Description
1	TSW-880/1080-MUMK, Mullion Mount Kit for TSW-880 and TSW-1080 Series
Additional Items	
1	Extrusion Assembly, Mullion Mount (4537717)
1	Panel Cover, Mullion, Plastic (2063165)
1	Front Mount, Mullion, Painted Plastic (4538480)
1	Bracket, Mullion, Side Mount, Carbon Steel (2053274)
1	Bracket, Mullion, Front Mount, Galvanized Metal (2053273)
2	Jackscrew, Metal (2053371)
2	Spacer, 3/16 in. (2007095)
4	Screw, 6-32 x 1/2 in. (2007238)
2	Screw, 6-32 x 1/2 in. (2007241)
1	Allen Wrench, 7/64 in. (2021068)
1	Jacknut Wrench, 4 in. (2053373)
1	Template, Mullion Cutout (4538422)
2	Screw, 6-32 x 7/16 in. (2007236)
2	Screw, 6-32 x 1/2 in. (2007240)
1	Screw, 6-32 x 1 in. (2054883)
4	Screw, 4-40 x 1/2 in. (2007174)
2	Screw, 6-32 x 3/8 in. (2007230)
2	Screw, 4-20 x 1/4 in. (2014382)

TSW-880/1080-MUMK Side Mounting Configuration

To install the TSW-880/1080-MUMK in a side mount configuration:

1. Drill two 1/3 in. (8.4 mm) holes and one 1/2 in. (13 mm) center hole in the desired location on the mullion using the included cutout template.


NOTES:

- For a completely flush installation, align the front edge of the mullion mount with the front of the mullion as a reference.
- The mullion must have a minimum mounting depth of 3/4 in. (19 mm). If the mullion has a shallower depth, contact [Crestron True Blue Support](#).
- The chosen mounting location must provide sufficient length to run the cables from their sources through the mullion and up to the touch screen.

2. Thread the 6-32 x 1 in. truss head screw through the opening in the included jacknut wrench and into one of the jacknuts, then align the jacknut with one of the 1/3 in. (8.4 mm) holes drilled into the mullion.


NOTE: Ensure that the jacknut wrench is oriented correctly.

3. Rotate the jacknut wrench clockwise until the jacknut is secured to the mullion.
4. Remove the screw and wrench from the installed jacknut and repeat steps 2 and 3 for the other jacknut.

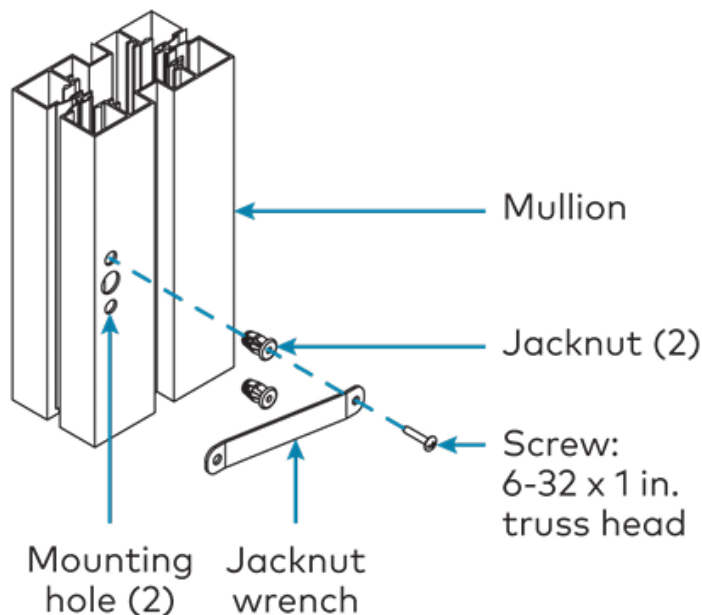


5. Run the Ethernet and any other cables up through the mullion and out of the center routing hole.

6. Attach the bracket to the jacknuts using the included 6-32 x 1/2 in. flat head screws.

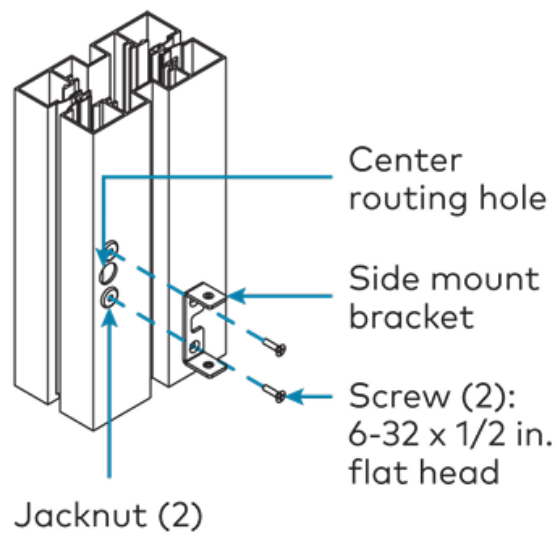


7. Install the mullion mount:

- a. Pull the two cover plates gently off of the top and bottom of the mullion mount to break the magnetic hold. Refer to the illustration below step 9 for cover plate locations.
- b. Slide the mullion mount over the side mount bracket and route any cables out of the center hole in the mount.
- c. Secure the mullion mount to the bracket using the included Allen wrench and the two 6-32 x 3/8 in. socket

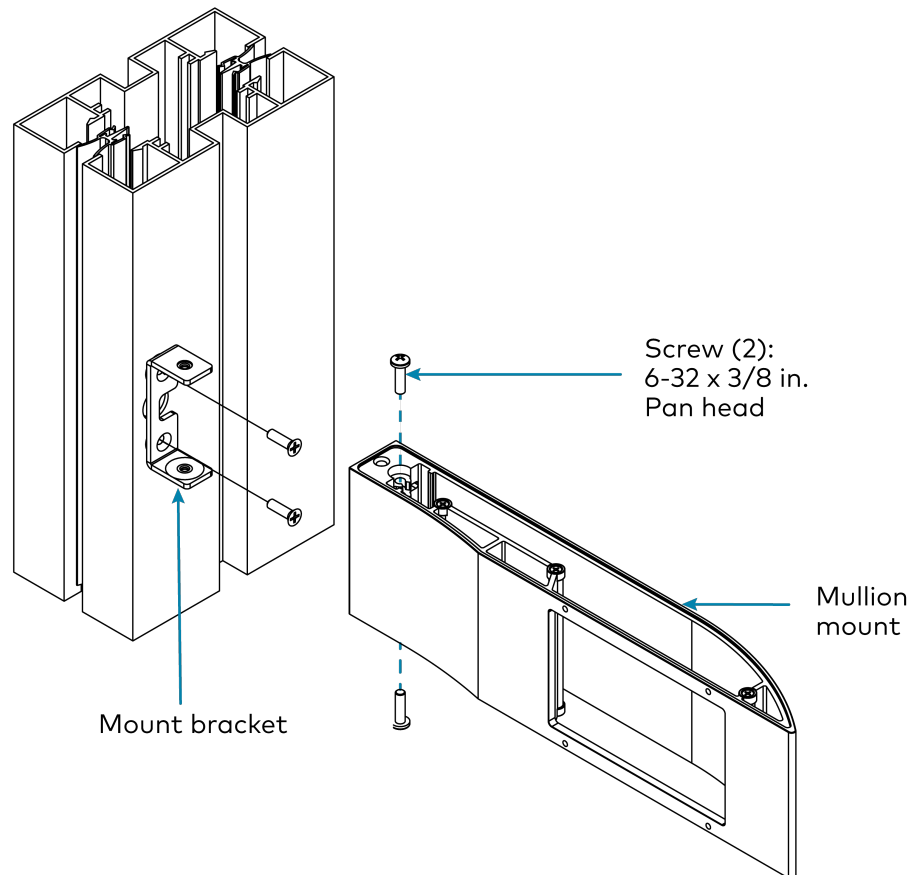


8. Align the panel cover as shown in the illustration below and secure it to the mullion mount with the four 4-40 x 1/2 in. undercut head screws.

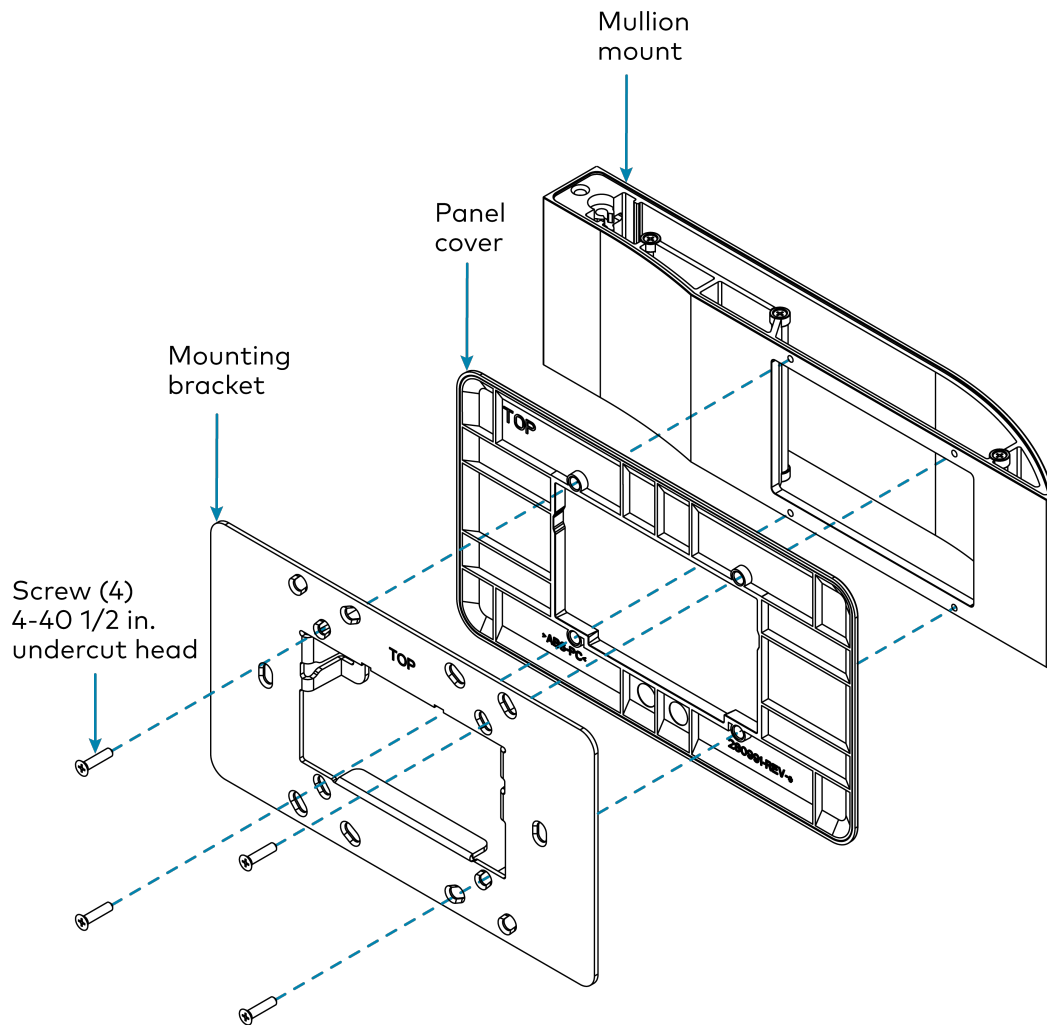

9. Reattach the two fitted cover plates on the top and bottom of the mullion mount so that the cover plates magnetically snap into place against the exposed screws.

NOTE: Ensure the cover plates are seated flush once installed in the mullion mount.

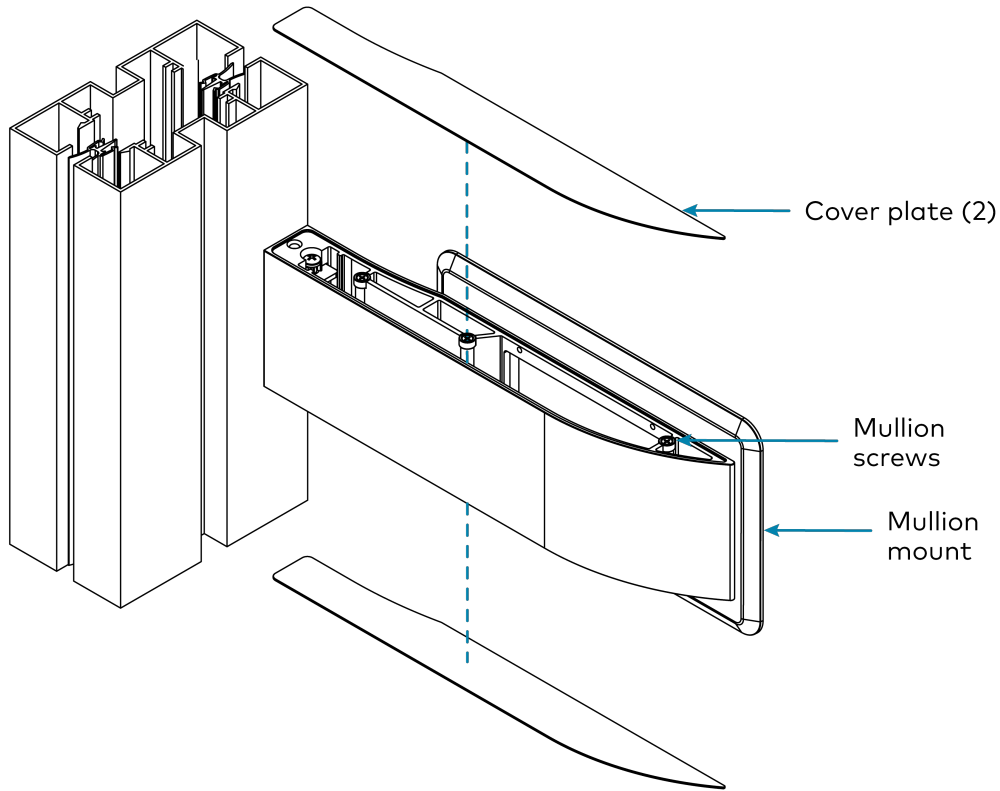

10. Route all necessary cables through the mounting bracket and connect to the touch screen. Apply power after all connections have been made.

TSW-880/1080-MUMK Front Mounting Configuration

To install the TSW-880/1080-MUMK in a front mount configuration:

1. Drill two 1/3 in. (8.4 mm) holes and one 1/2 in. (13 mm) center hole in the desired location on the mullion using the included cutout template.


NOTES:

- The mullion must have a minimum mounting depth of 3/4 in. (19 mm). If the mullion has a shallower depth, contact [Crestron True Blue Support](#).
- The chosen mounting location must provide sufficient length to run the cables from their sources through the mullion and up to the touch screen.

2. Thread the 6-32 x 1 in. truss head screw through the opening in the included jacknut wrench and into one of the jacknuts, then align the jacknut with one of the 1/3 in. (8.4 mm) holes drilled into the mullion.

NOTE: Ensure that the jacknut wrench is oriented correctly.


3. Rotate the jacknut wrench clockwise until the jacknut is secured to the mullion.
4. Remove the screw and wrench from the installed jacknut and repeat steps 2 and 3 for the other jacknut.

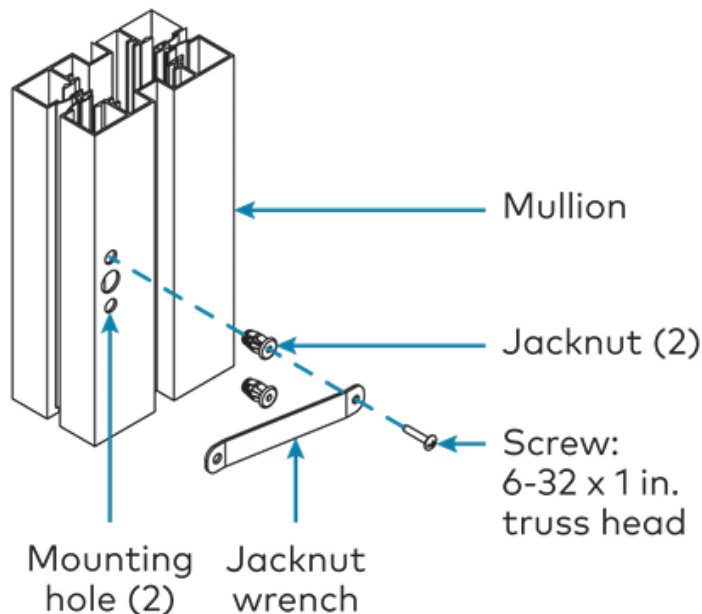


5. Run the Ethernet cable and USB cables (if used) up through the mullion and out of the center routing hole.
6. Attach the front mount bracket to the jacknuts using the included 6-32 x 1/2 in. pan head screws.

7. Install the mullion mount:

- a. Pull the two cover plates gently off of the top and bottom of the mullion mount to break the magnetic hold. Refer to the illustration below step 10 for cover plate locations.
- b. Route any cables out of the center hole in the mount.
- c. Secure the mullion mount to the bracket using the included the two 6-32 x 7/16 in. pan head screws with the two #06 spacers.

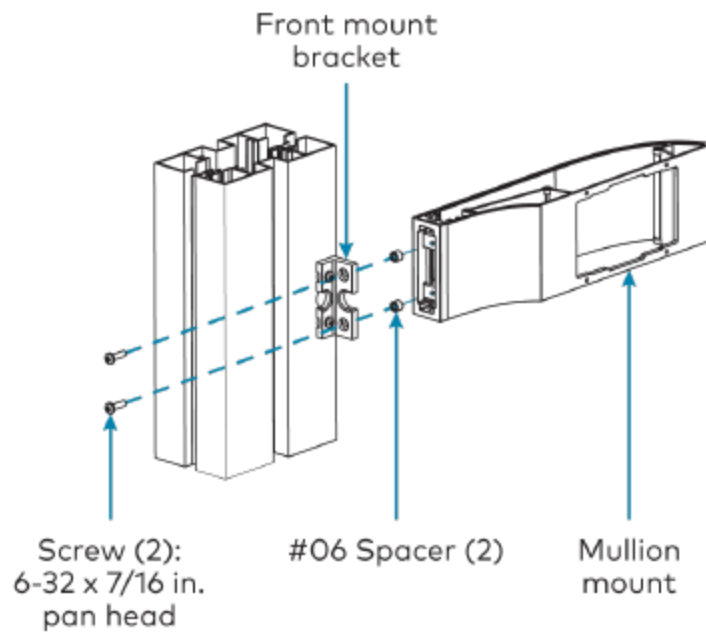


8. Align the panel cover as shown in the illustration below and secure it to the mullion mount with the four 4-40 x 1/2 in. undercut head screws.

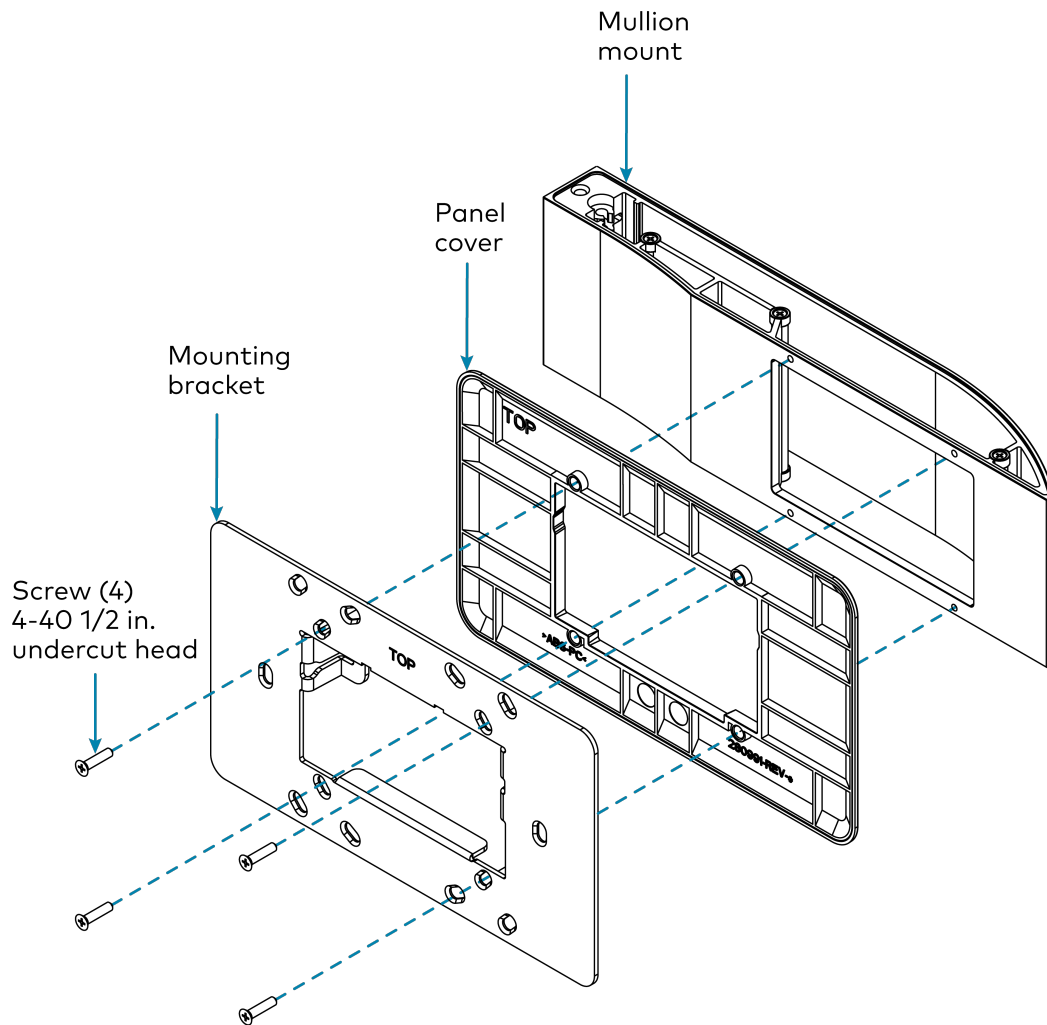


9. Slide the front corner cap over the exposed edges of the front mount bracket as shown in the illustration below, and secure it to the mullion using the two 4-40 x 1/4 in. flat head screws.

10. Reattach the two fitted cover plates on the top and bottom of the mullion mount so that the cover plates magnetically snap into place against the exposed screws.

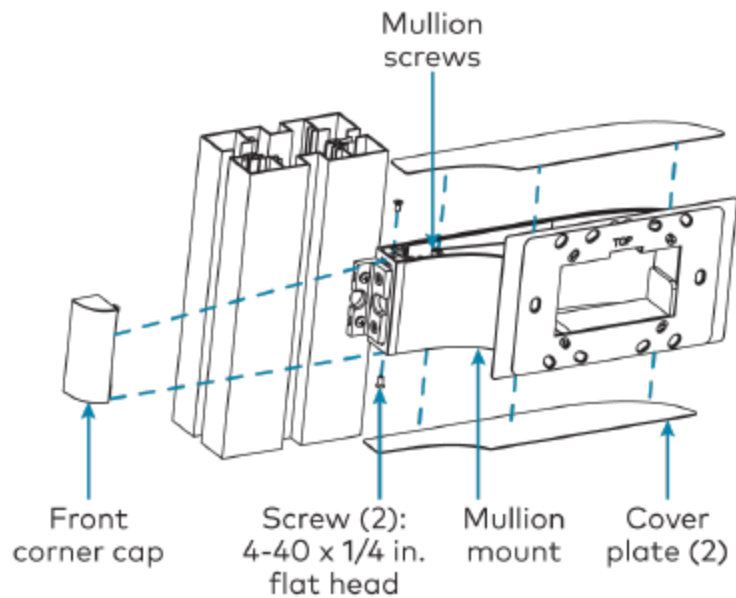

Connect the Touch Screen

After all connections have been made, push the touch screen gently into the mounting bracket so the rear housing is secured within the center opening of the mounting bracket.

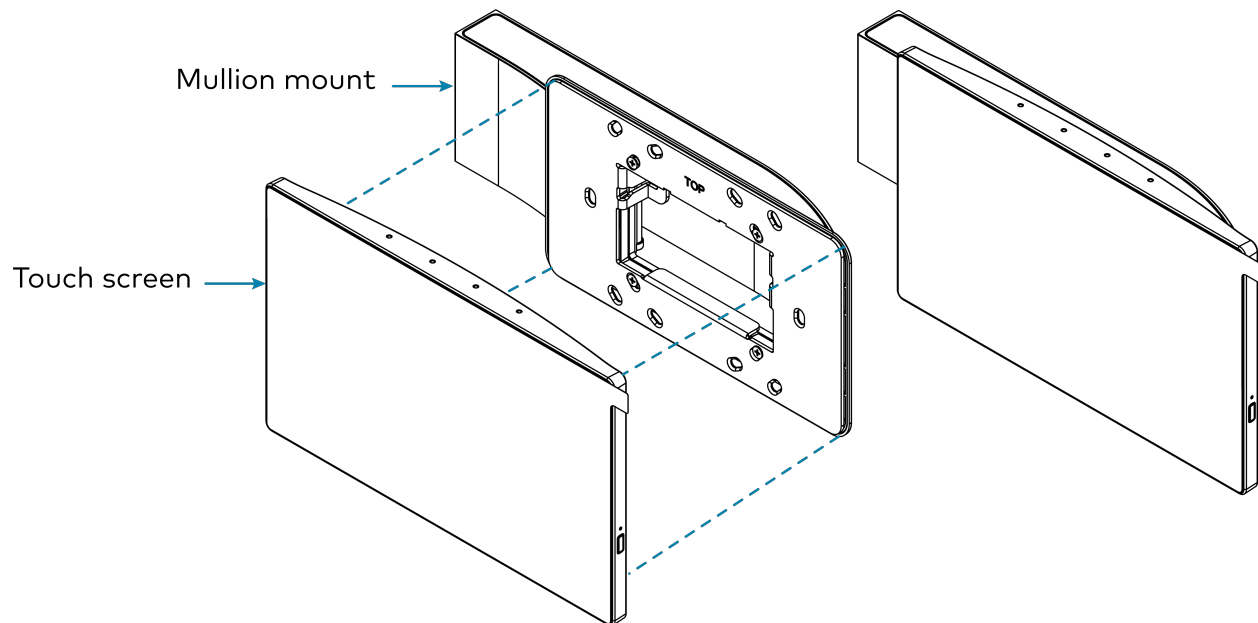

TSW-UMB-80 Installation

The TSW-UMB-80 provides an in-wall mounting solution for the TSS-80 and TSW-80 series touch screens. For preconstruction wall mounting applications, the TSW-UMB-80 can be used along with the [TSW-UMB-80-PMK](#) mounting kit. The [TSW-UMB-80-BBI](#) wall mount back box can be used for masonry and concrete installations. Refer to [TSW-UMB-U-PMK Installation on page 85](#) and [TSW-UMB-80-BBI Installation on page 81](#) for more information.

In the Box

Qty.	Description
1	TSW-UMB-80, Universal Mounting Bracket for TSW-80 Series
Additional Items	
2	Screw, 6-32 x 1/2 in. (2007240)
1	Template (4538516)


TSW-UMB-80 Mounting Instructions

Use the following procedure to install the TSW-UMB-80:

NOTE: If installing the TSW-UMB-80 into a wall with a shallow mounting depth, remove the two 1 in. screws that hold the two halves of the bracket together and replace them with the included 6-32 x 1/2 in. screws.


1. Choose a mounting location that is free of any wiring, studs, or other obstructions. Make a small hole in the surface near the center of the chosen location to verify that it is suitable for mounting.

2. Place the included [cutout template](#) in the desired location on the mounting surface and confirm it is level.

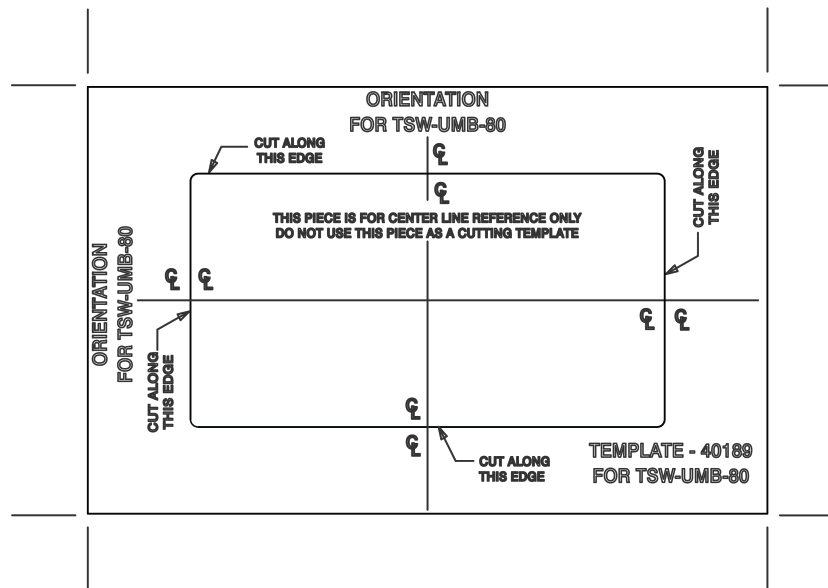


3. Trace an outline around the center cutout of the template.
4. Use the outline to cut an opening into the surface using an appropriate drywall saw.
5. Loosen the two screws on the TSW-UMB-80 assembly, but do not remove them.


6. Install the assembly into the opening, bottom first.

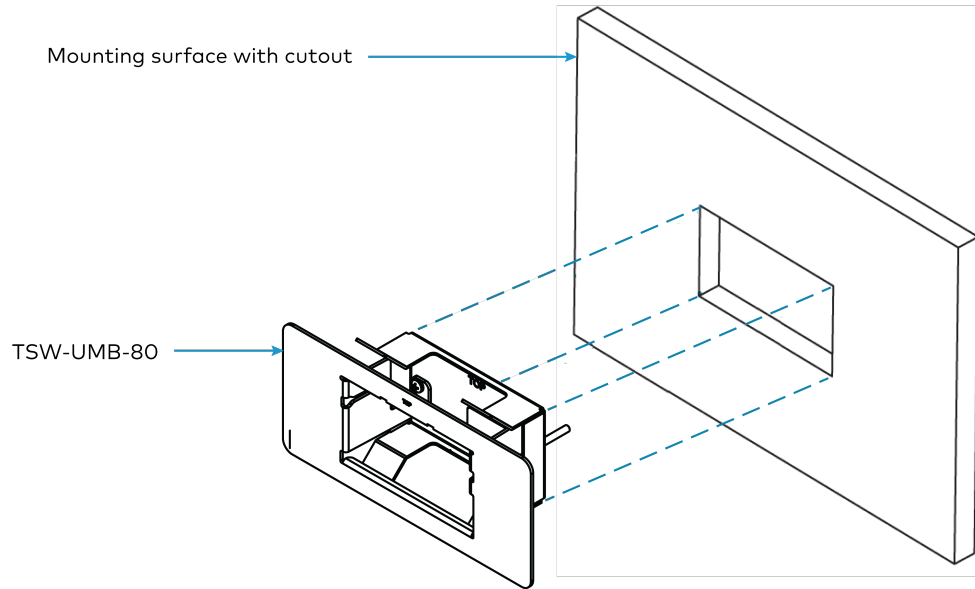

7. Reach into the assembly and push the rear half back so that it is behind the mounting surface completely. Ensure the front of the assembly is level.

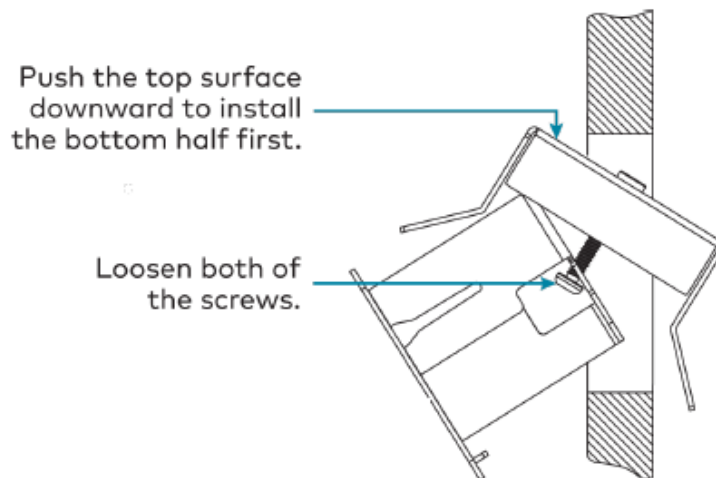

8. Tighten the two screws on the assembly to secure it to the surface. Do not overtighten the screws.

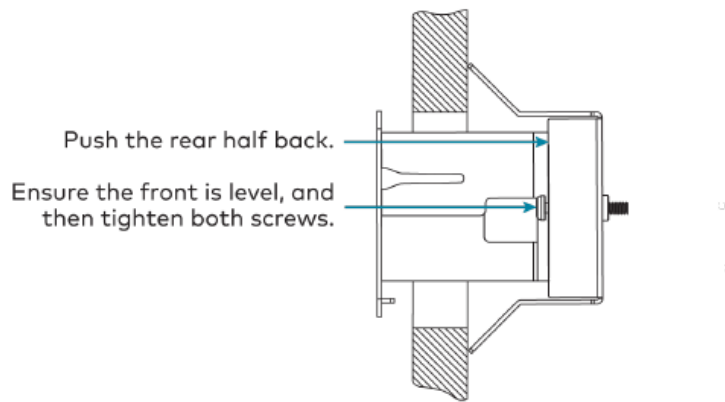

9. Attach the TSW-880/1080 mounting bracket to the TSW-UMB-80. Refer to for more information on installing the mounting bracket.
10. Route all necessary cables through the mounting bracket and connect to the touch screen. Apply power after all connections have been made.
11. After all connections have been made, push the touch screen gently into the mounting bracket so the rear housing is secured within the center opening of the mounting bracket.

TSW-UMB-80-BBI Installation

The TSW-UMB-80-BBI is a wall mounted metal back box for the TSS-80 and TSW-80 series touch screens. The TSW-UMB-80-BBI is designed to be used along with the [TSW-UMB-80](#) universal mounting bracket. Refer to the [TSW-UMB-80 Installation on page 77](#) for further information.

In the Box


Qty.	Description
1	TSW-UMB-80-BBI, Wall Mount Back Box for TSW-80 Series
Additional Items	
1	Front Mounting Bracket (2064071)
2	Screw, 6-32 x 1/2 in. (2007240)

TSW-UMB-80-BBI Mounting Instructions

Use the following procedure to install the TSW-UMB-80-BBI:


1. Choose a mounting location that is free of any wiring, studs, or other obstructions. Make a small hole in the surface near the center of the chosen location to verify that it is suitable for mounting.

2. Use the two included 6-32 x 1/2 in. screws to attach the front portion of the TSW-UMB-80 to the TSW-UMB-80-BBI.

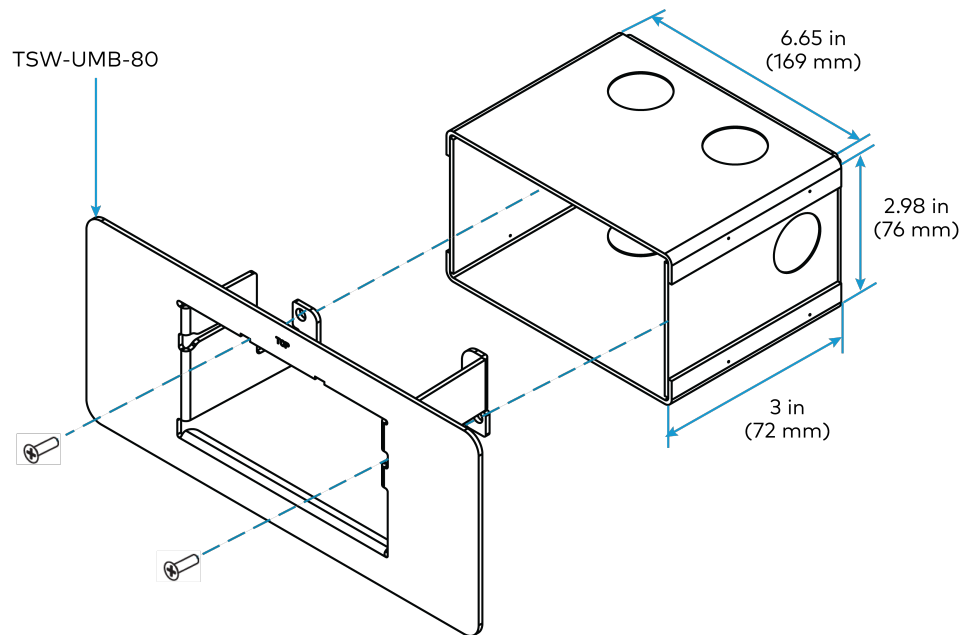


3. Remove the appropriate knockout(s) on the TSW-UMB-80-BBI for routing wiring to the touch screen.
4. Route wiring through the knockout(s) and out through the front opening in the TSW-UMB-80.
5. Use the dimensions shown in the illustration above to create an appropriately sized cutout in the mounting surface. No minimum clearances are required.

6. Mount the TSW-UMB-80-BBI into the cutout in the mounting surface as shown in the following illustration. Ensure the "TOP" text on both the TSW-UMB-80 and TSW-UMB-80-BBI is facing upward prior to installation.

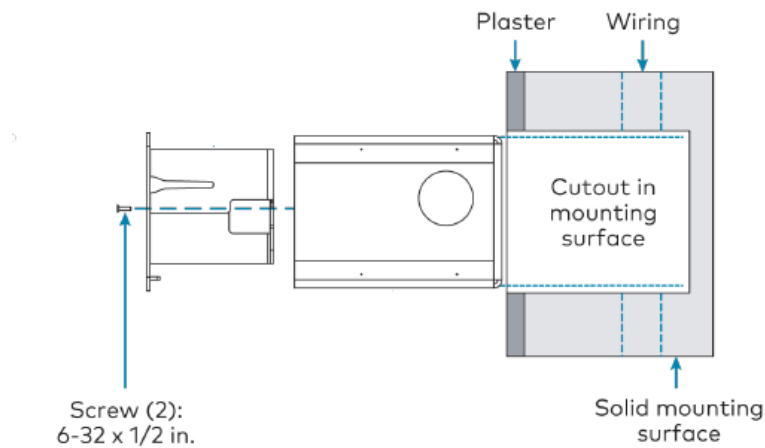

7. Attach the TSW-880/1080 mounting bracket to the TSW-UMB-80-BBI. Refer to [Refer to TSW-880 and TSW-1080 Installation](#) for more information on installing the mounting bracket.
8. Route all necessary cables through the mounting bracket and connect to the touch screen. Apply power after all connections have been made.

9. After all connections have been made, push the touch screen gently into the mounting bracket so the rear housing is secured within the center opening of the mounting bracket.

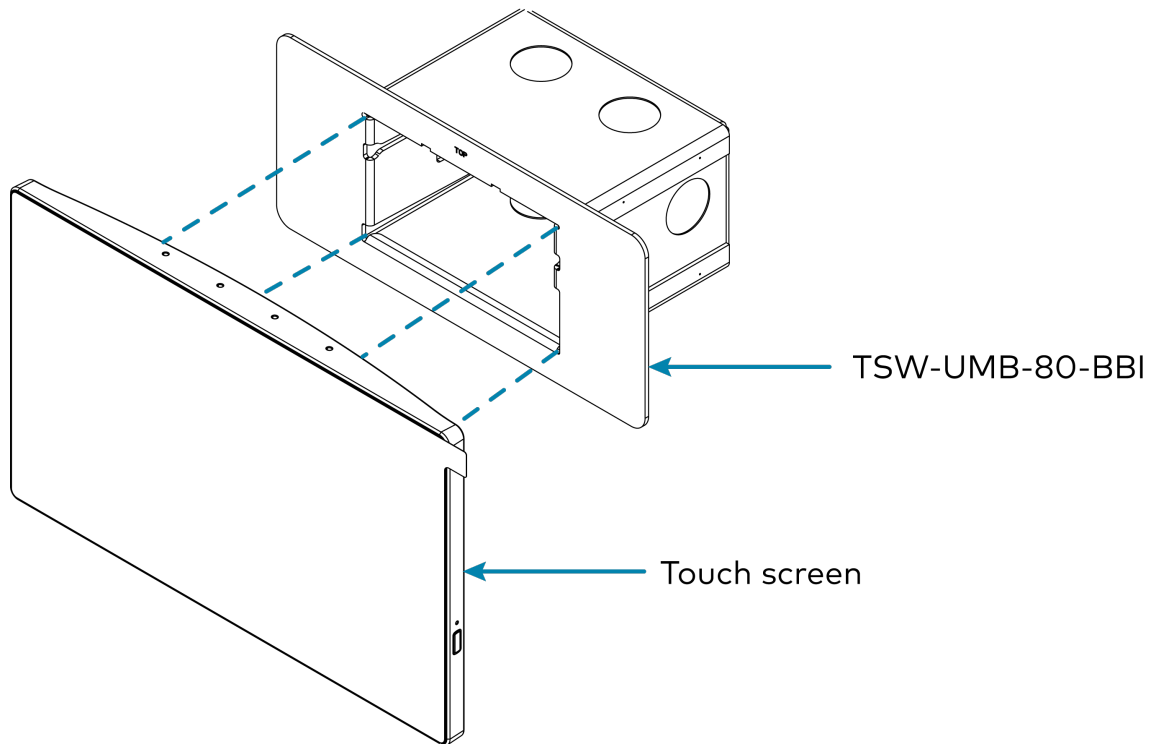

TSW-UMB-U-PMK Installation

The TSW-UMB-U-PMK is a preconstruction mounting kit which permits fastening to the left or right-hand stud of a framed wall prior to installing drywall. The TSW-UMB-U-PMK can be used with the [TSW-UMB-80](#) universal mounting bracket. Refer to the [TSW-UMB-80 Installation on page 77](#) for further information.


Refer to the following sections for information on mounting the TSW-UMB-U-PMK.

In the Box

Qty.	Description
1	TSW-UMB-U-PMK, Preconstruction Mounting Kit for TSW-60/70/80 Series

TSW-UMB-U-PMK Mounting Instructions

For preconstruction applications, use standard drywall nails or screws (not included) to attach the TSW-UMB-U-PMK to a wall stud as shown in the following illustration.

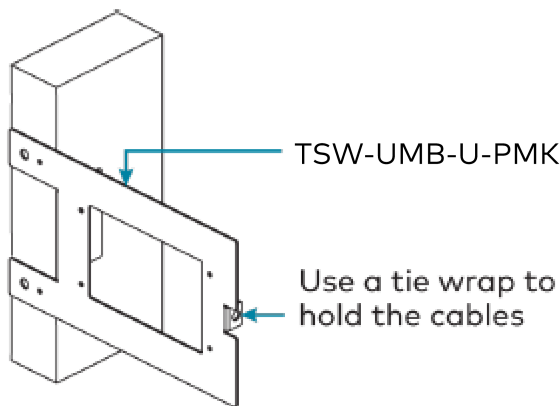

For postconstruction applications:

1. Use the PMK as a cutout template by turning it to face the mounting surface.
2. Confirm the PMK is level, then use finishing nails to tack the PMK to the surface through the four small holes around the cutout opening.
3. Trace an outline around the center cutout of the PMK.
4. Use the outline to cut an opening into the surface using an appropriate drywall saw.

To connect the touch screen:

1. Attach the TSW-880/1080 mounting bracket to the TSW-UMB-U-PMK. Refer to [TSW-880 and TSW-1080 Installation](#) for more information on installing the mounting bracket.
2. Route all necessary cables through the mounting bracket and connect to the touch screen. Apply power after all connections have been made.
3. After all connections have been made, push the touch screen gently into the mounting bracket so the rear housing is secured within the center opening of the mounting bracket.

TSW-RMB Installation

The 80 Series TSW-RMB series retrofit mounting brackets provide versatile mounting solutions for TSS-80 and TSW-80 series touchscreens.

In the Box

Qty.	Description
1	TSW-RMB-1, Retrofit Mounting Bracket
Additional Items	
1	Bracket, Adapter, APAD (2055401)
1	Cover Plate, Adapter (2055405)
2	Mounting Bracket (4001193)
8	Screw, 4-40 x 3/4 in. Flat, Phillips (2029110)
4	Screw, 4-40 x 1-1/2 in. Flat Head, Phillips (2037906)
1	TSW-RMB-2, Retrofit Mounting Bracket
Additional Items	
1	Bracket, Adapter, TPS-4L (2055402)
1	Cover Plate, Adapter, TPS-4L (2055406)
2	Mounting Bracket, TPS-4L (4519515)
8	Screw, 4-40 x 3/4 in. Flat, Phillips (2029110)
4	Screw, 4-40 x 1-1/2 in. Flat Head, Phillips (2037906)
1	TSW-RMB-3, Retrofit Mounting Bracket
Additional Items	
1	Bracket, Adapter, TPS-6L (2055403)
1	Cover Plate, Adapter, TPS-6L (2055407)
2	Mounting Bracket, TPS-6L (4519516)
8	Screw, 4-40 x 3/4 in. Flat, Phillips (2029110)
4	Screw, 4-40 x 1-1/2 in. Flat Head, Phillips (2037906)


TSW-RMB Mounting Instructions

Use the following procedure to install the TSW-RMB-1, TSW-RMB-2, or TSW-RMB-3:

Install with a Back Box

To install the TSW-RMB in applications with an existing back box:

1. Attach the adapter bracket to the existing back box using the included 4-40 x 1-1/2 in. screws.
2. Attach the TSW-80 mounting bracket (included with the touch screen) and the cover plate to the adapter bracket using four of the included 4-40 x 3/4 in. screws. Refer to the following illustration:

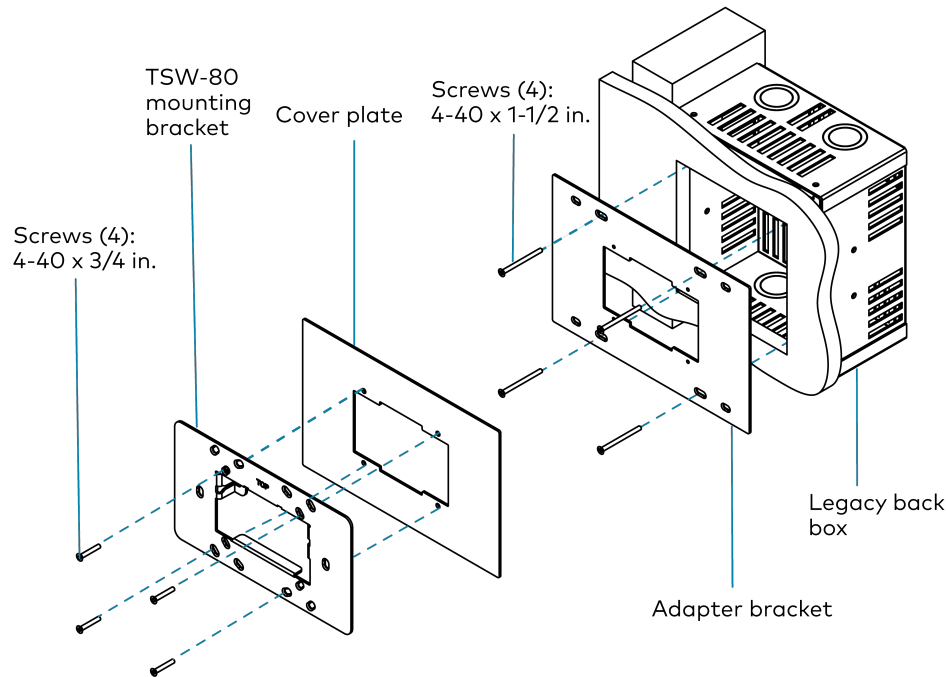


3. Attach the touch screen to the TSW-80 mounting bracket to complete the installation.

Install without a Back Box

To install the TSW-RMB in applications without an existing back box:

1. Attach the adapter bracket loosely to the included mounting brackets using four of the 4-40x 3/4 in. screws. Insert the screws far enough that they engage the threads in the bracket, but do not tighten yet.
2. Push the assembly into the wall until the mounting brackets are seated fully and clip to the wall.
3. Tighten the four screws to secure the mounting bracket.

4. Attach the TSW-80 mounting bracket (included with the touch screen) and the cover plate to the adapter bracket using the four remaining 4-40 x 3/4 in. screws. Refer to the following illustration:

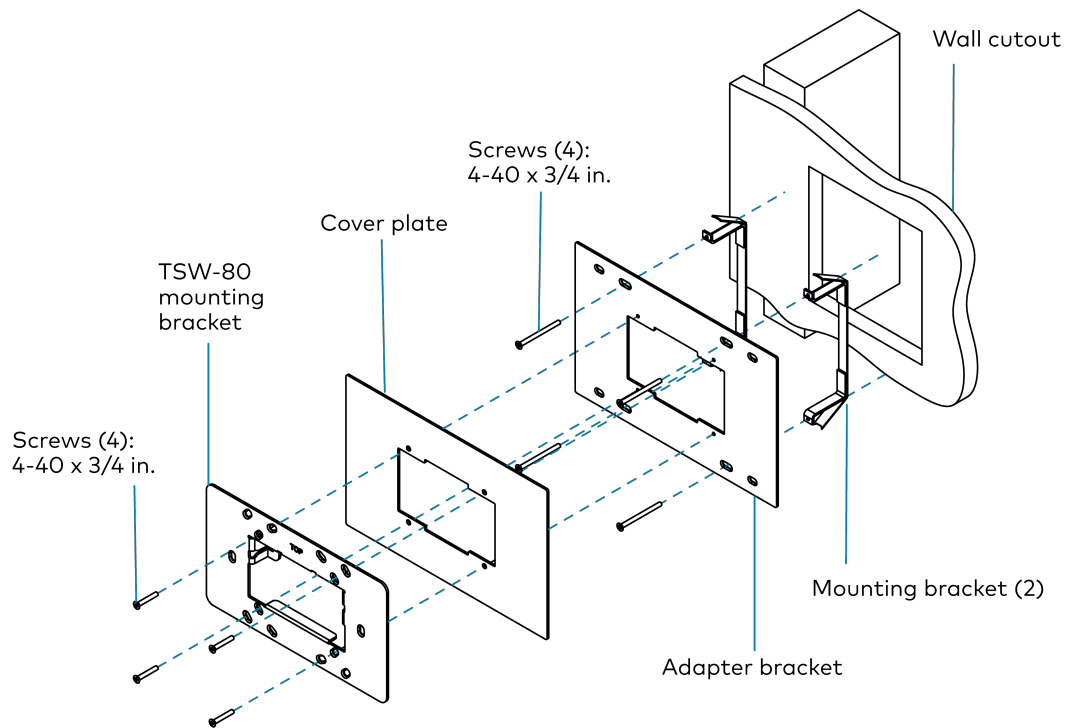

5. Attach the touch screen to the TSW-80 mounting bracket to complete the installation.

TSW-RMK Installation

The 80 Series TSW-RMK-3U and TSW-RMK-4U series rack mount kits provide versatile mounting solutions for TSS-80 and TSW-80 series touch screens.


In the Box

Qty.	Description
1	TSW-RMK-3U, Rack Mount Kit
Additional Items	
1	Plate, Rack Mount (2048550)
1	Mounting Bracket (2055409)
4	Screw, 4-40 x 3/8 in., Phillips (2007173)
2	Screw, 6-32 x 5/16 in., SEMS, Phillips (2007224)
4	Screw, 6-32 x 3/8 in., Phillips (2007235)
1	TSW-RMK-4U, Rack Mount Kit
Additional Items	
1	Plate, Rack Mount (2048551)
4	Screw, 4-40 x 3/8 in., Phillips (2007173)

TSW-RMK Mounting Instructions

Use the following procedure to install a TSS-80 or TSW-80 touch screen into a rack:

1. Attach the rack mounting plate to the rack using the appropriate mounting hardware.
2. Attach the TSW-80 mounting bracket (included with the touch screen) to the rack mounting plate using the included 4-40 x 3/8 in. screws. Refer to the illustration below:

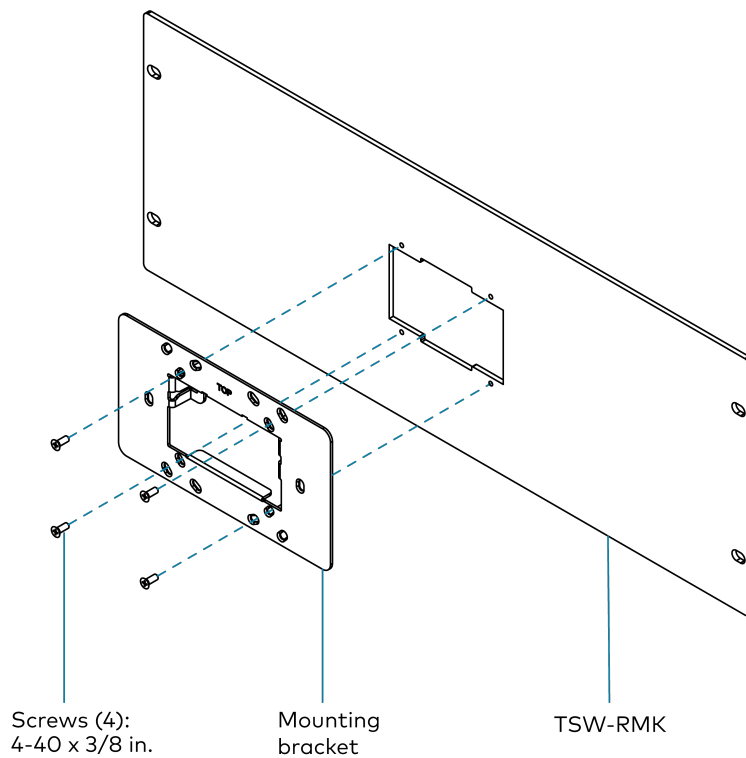

3. Attach the touch screen to the TSW-80 mounting bracket to complete the installation.

Configuration

Prior to configuration, ensure the device is running the latest firmware. Refer to [Initial Setup on page 93](#).

This section provides the following information:

- [Initial Setup](#)
- [Web Configuration](#)
- [Local Configuration](#)
- [Application Selection](#)

Initial Setup

Use the following procedures to set up the touch screen prior to regular operation.

Complete the Setup Wizard

When power is applied for the first time, the touch screen may take up to two minutes to boot.

The touch screen provides a built-in setup wizard that is displayed after first applying power to the touch screen or after a restore. The setup wizard is used to configure various touch screen settings required for operation. After completing the setup wizard, device settings for the touch screen may be configured using the built-in settings screens, the web configuration interface, or XiO Cloud. For more information on configuring the touch screen, refer to [Configuration on page 92](#).


Each screen of the setup wizard is described in the sections that follow.

Create an Admin Account


The first time the web configuration interface is accessed, a page is displayed asking the user to create an admin account.

To create an admin account:

1. Enter a username and password for the admin account in the appropriate text fields.

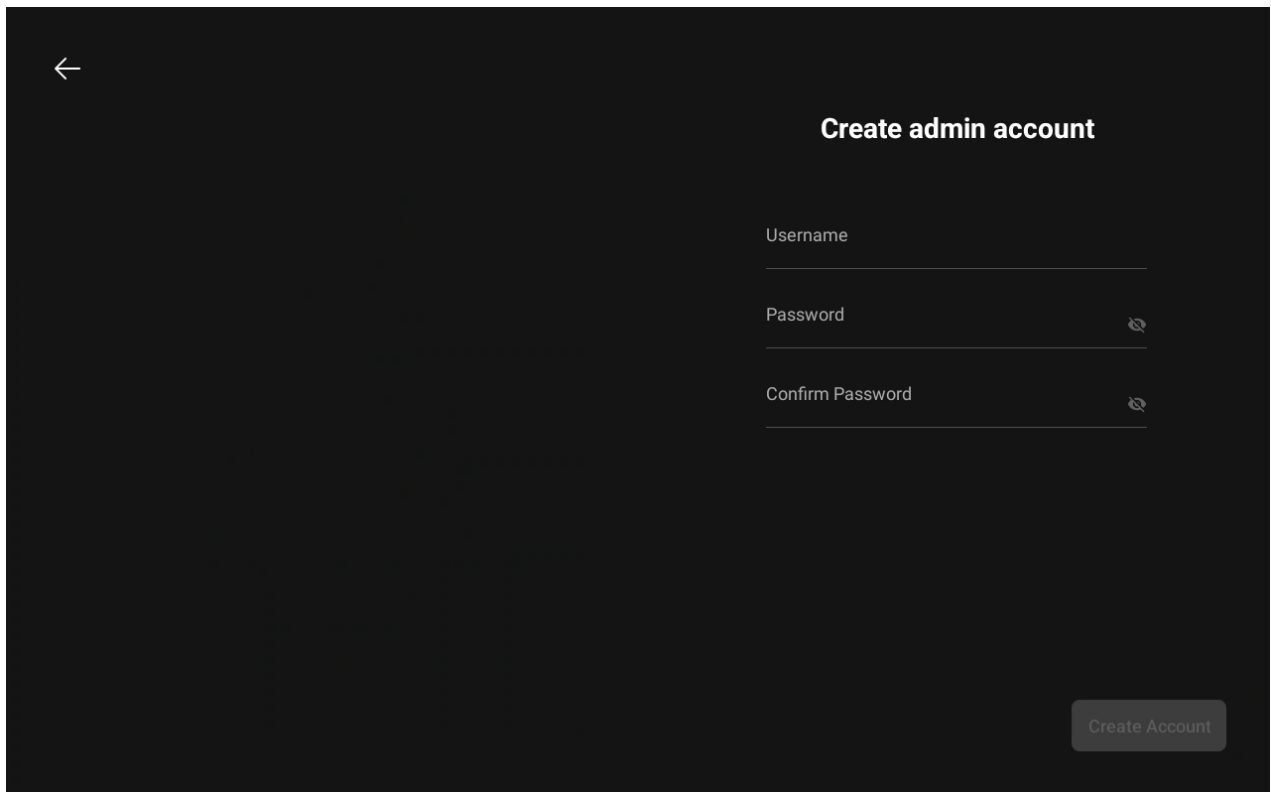A screenshot of a web interface for creating an admin account. The background is dark gray. In the top left corner, there is a white left-pointing arrow. In the top right corner, the text 'Create admin account' is displayed in white. Below this text, there are three input fields: 'Username', 'Password', and 'Confirm Password'. Each field has a light gray border and a small white icon on the right side (a magnifying glass for the first two, and a magnifying glass with a slash for the third). At the bottom right of the form, there is a gray button with the text 'Create Account' in white.

2. Select **OK** to create the admin account. The Setup Wizard refreshes to show the standard login page.

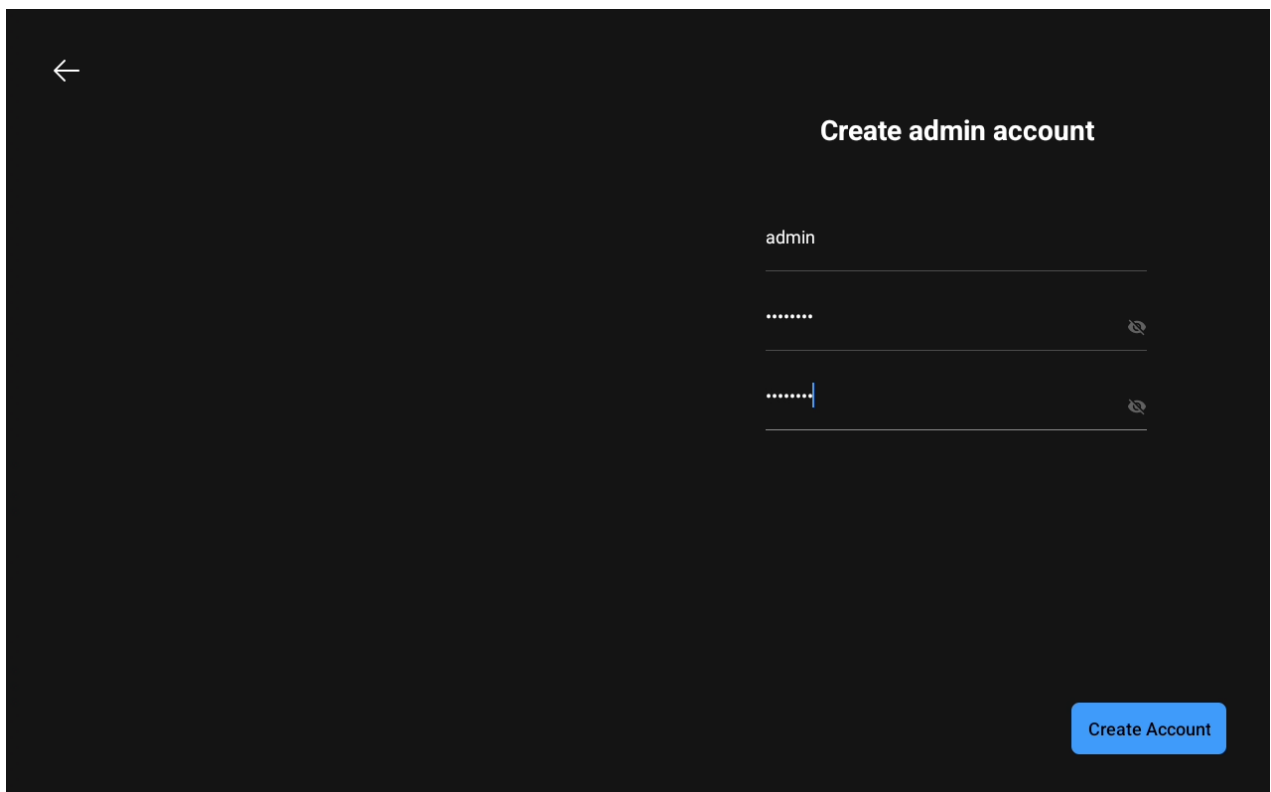

←

Create admin account

admin

.....

.....

Create Account

3. Re-enter the credentials created in step 1 and select **Sign In**.


NOTE: The username and password must also be entered when connecting from Crestron Toolbox.

Connect to a Network


If using a LAN connection, network settings will connect automatically, displaying the green **You're connected** message.

Refer to [Web Configuration on page 101](#) for more information on how to set up network settings through the touch screen IP address or XiO Cloud.


To set network and Wi-Fi settings:

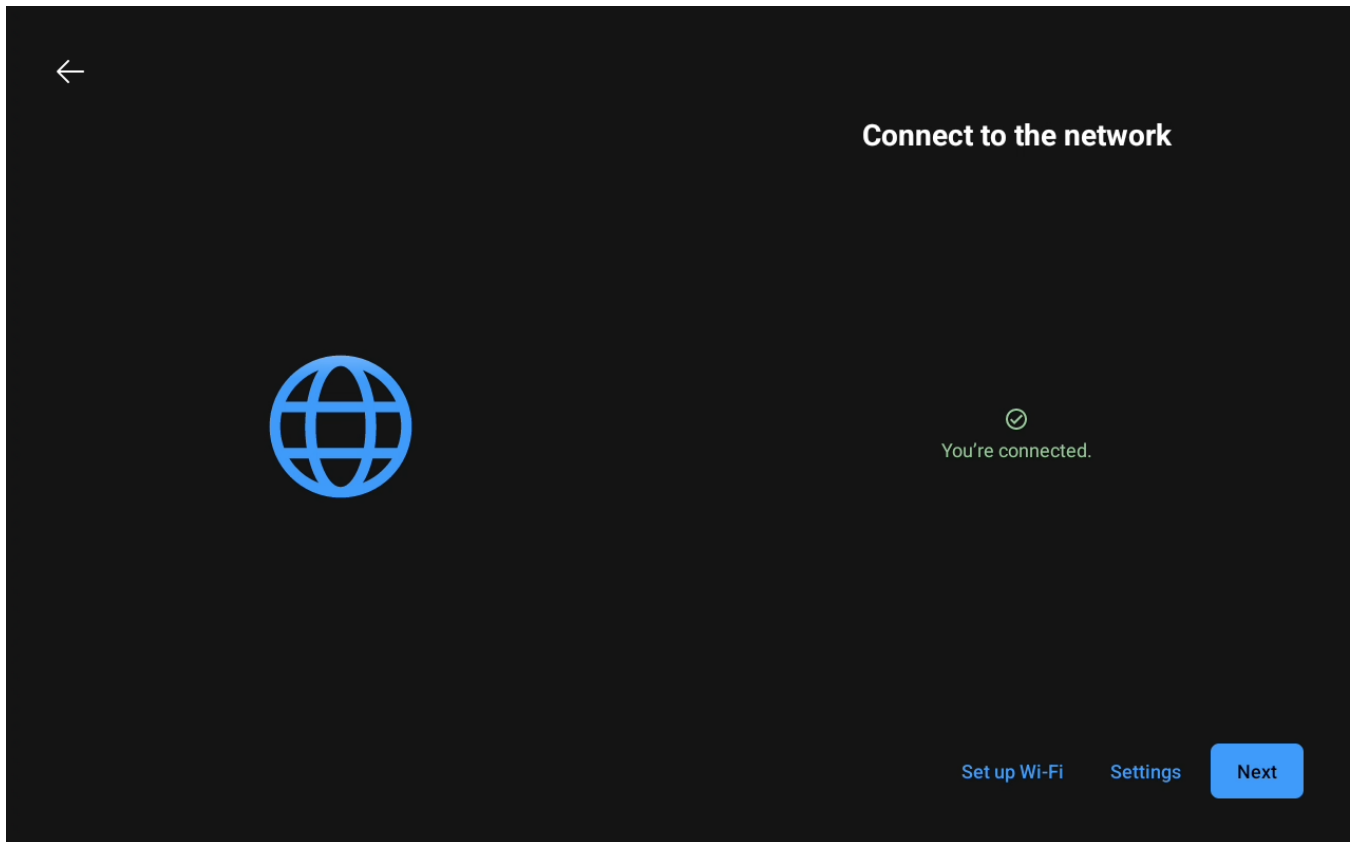


1. Select the **Set up Wi-Fi** button at the bottom of the screen.
2. Select a Wi-Fi network and complete the required **Network Settings** fields.

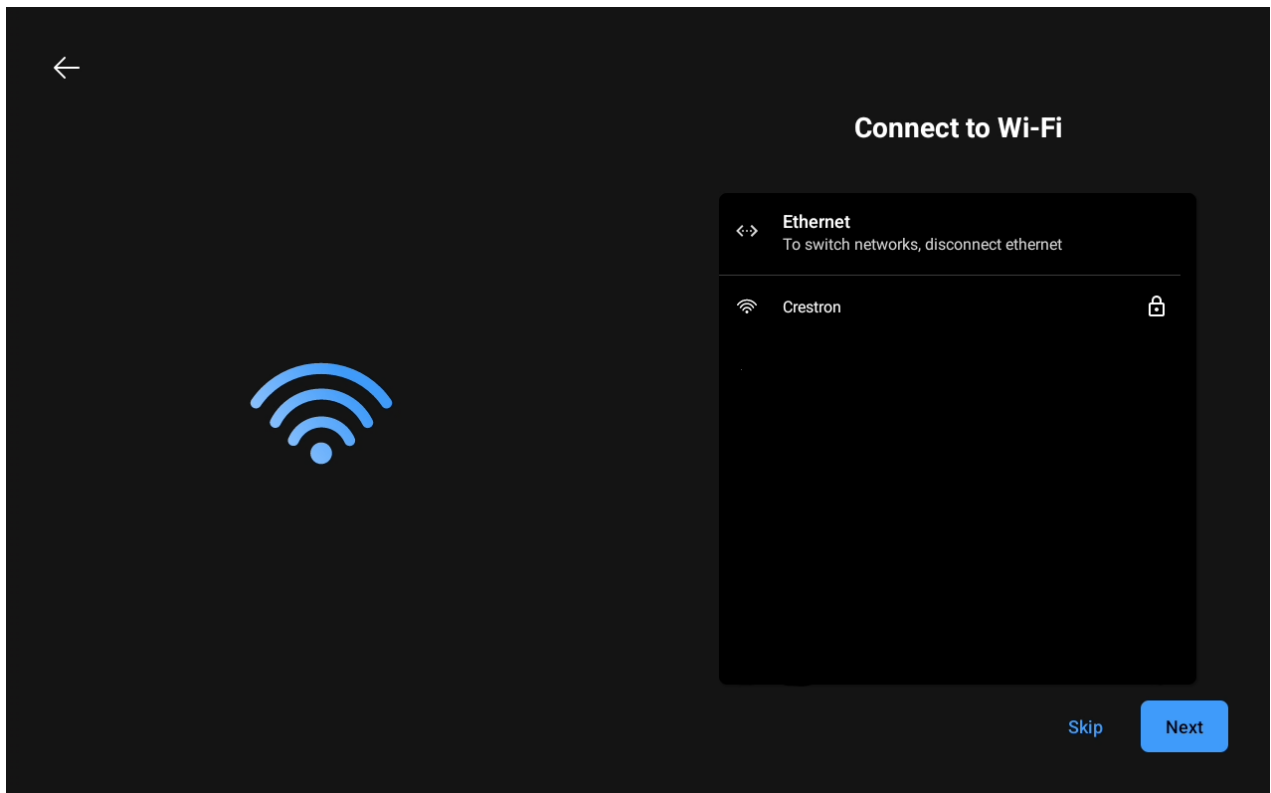

NOTE: Wi-Fi only connects when there is no direct connection or link via the Ethernet port.

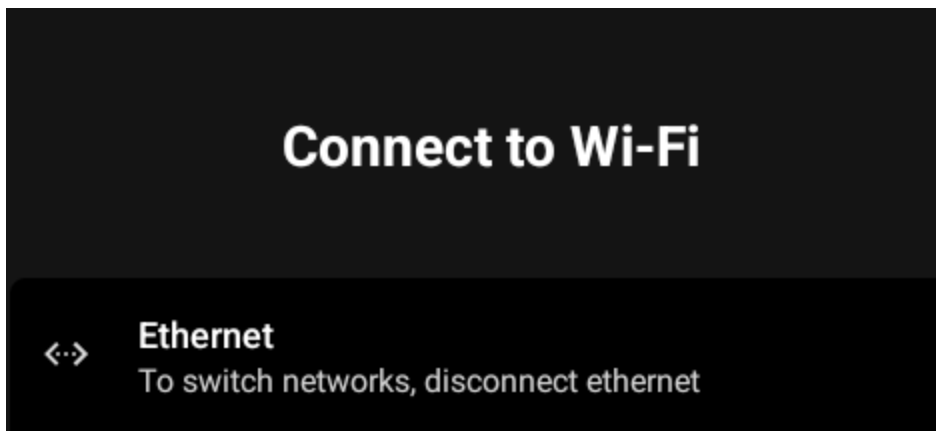

- a. Select **Add network** and enter desired network details.

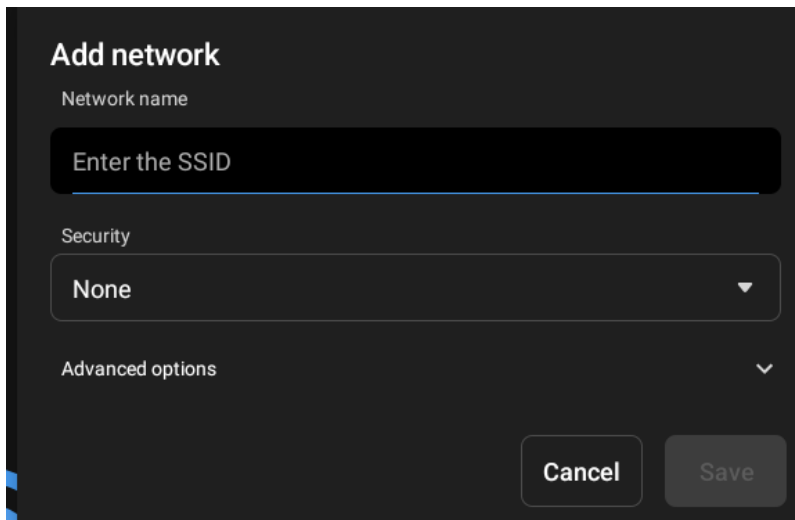


- b. Select **Save**.

Set the Time Zone

The time zone can also be set from the web configuration interface using either the touch screen IP address or the XiO Cloud service. Refer to [Web Configuration on page 101](#) for more information.

To set the time zone:

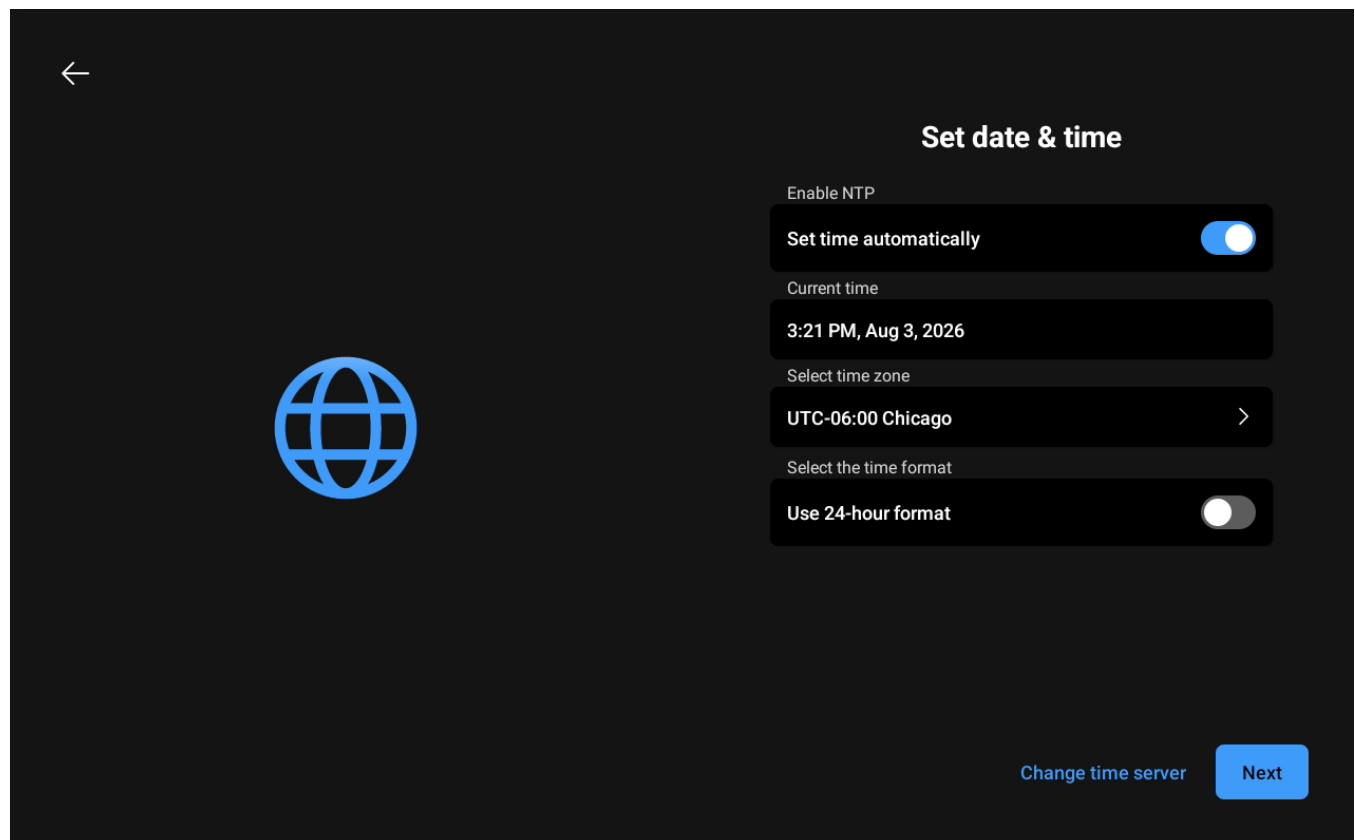


1. Turn on the **Enable NTP** toggle to set time automatically.
2. Edit the date and time manually by selecting **Current time**.
3. Select the time zone where the touch screen will be used from the **Select time zone** drop-down menu.
4. Turn **Select the time format** on or off to use the touch screen in 24 hour or 12 hour format, respectively.
5. Select **Next**.

Select an Application


The touch screen ships with various built-in applications.

To select a touch screen application:

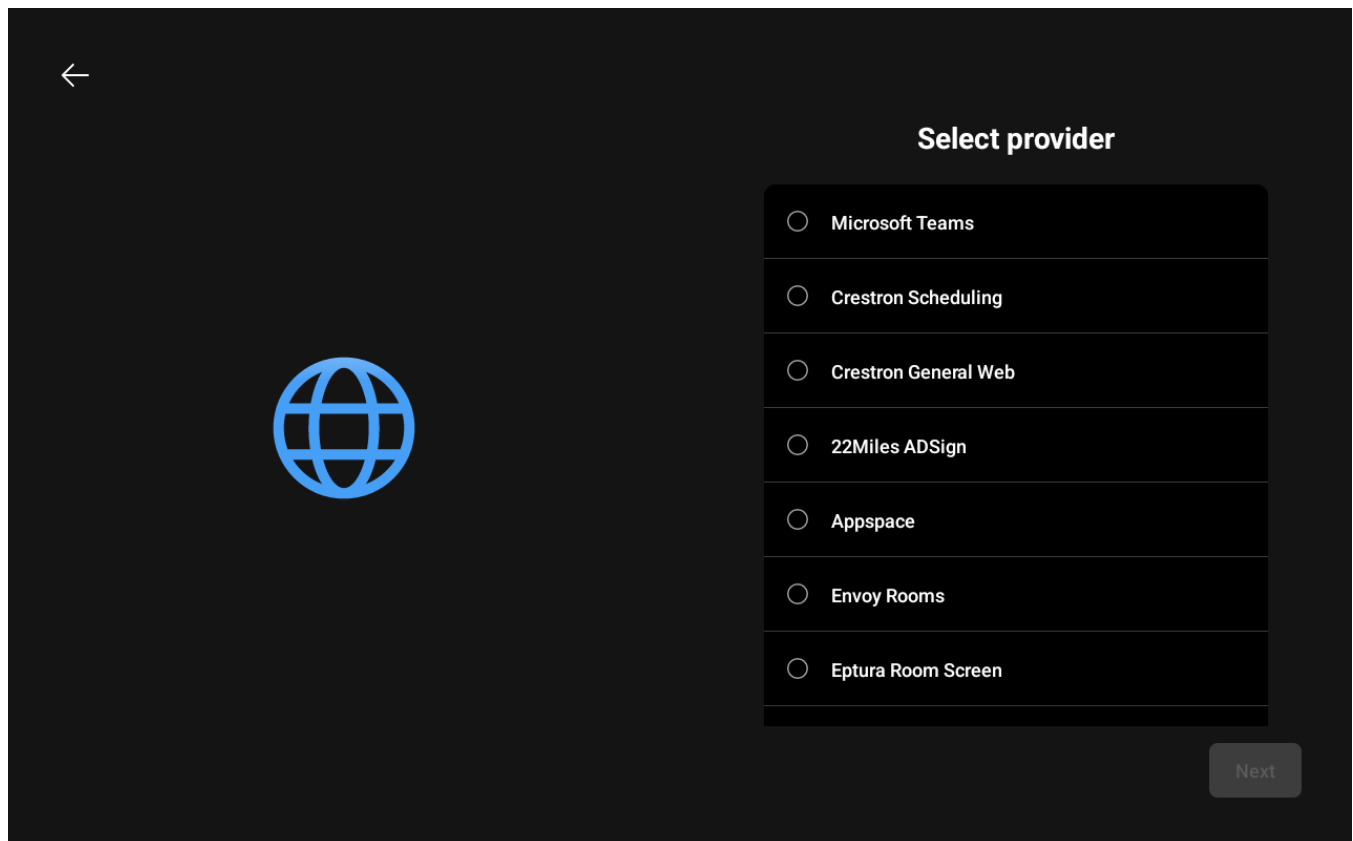

1. Select the desired touch screen application from the displayed menu. Select **Next**.
2. Configure any app-specific settings as required.

3. The touch screen restarts to display the user interface for the selected application.

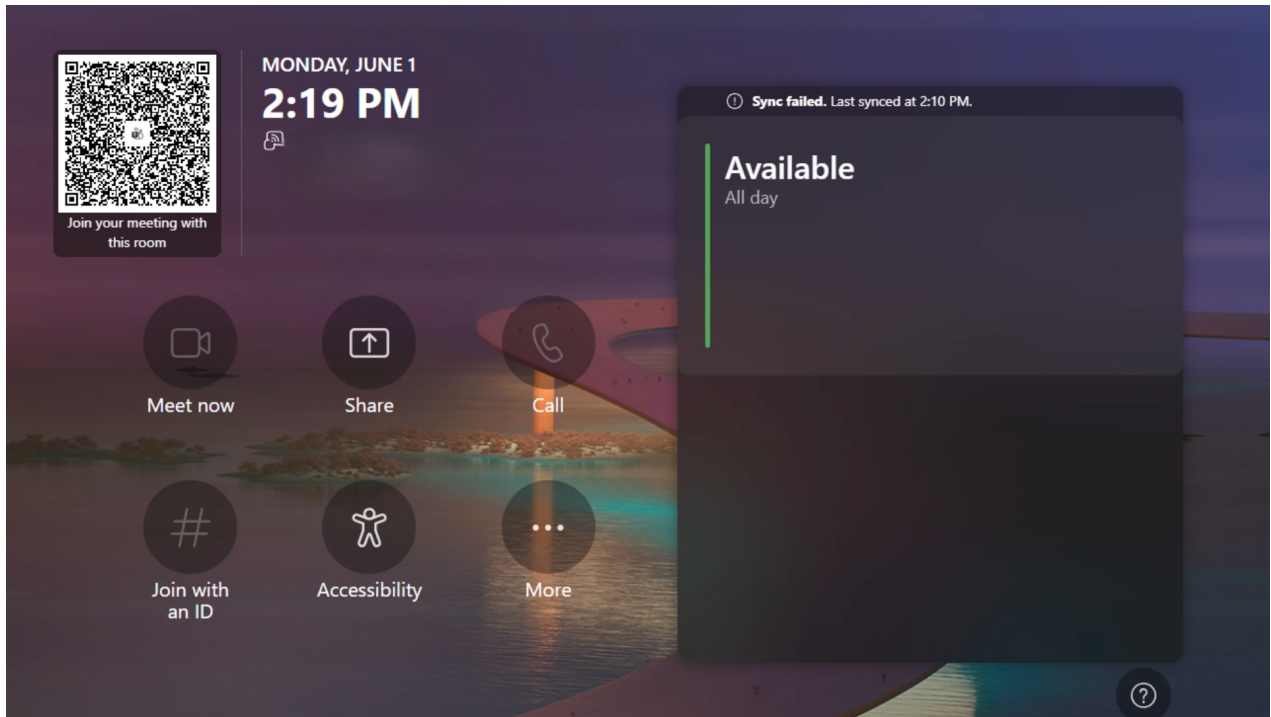

Access the Device Settings Screens

To access the built-in settings screens, place five fingers on the display and hold for 15 seconds.

Use the settings screens to configure various settings for the touch screen. The user must log into an admin account to access administrator level settings screens. Refer to [Local Configuration on page 146](#) for more information on the device settings screens.

Access the Web Configuration Interface

The touch screen provides a web configuration interface that is used to view and configure various touch screen settings and to select an application. The interface can be accessed using the touch screen IP address or the XiO Cloud® service.

Touch Screen IP Address

To access the web configuration interface using the touch screen IP address:

1. Ensure that the touch screen is connected to the network.
2. Use the Device Discovery tool in [Crestron Toolbox™](#) software to discover the touch screen and its IP address on the network.
3. Enter the touch screen IP address into a web browser.

XiO Cloud

The XiO Cloud® service allows supported devices across an enterprise to be managed and configured from one central and secure location in the cloud. Supported Crestron® devices are configured to connect to the service after completing the setup wizard.

If registering with XiO Cloud, scan the QR code to link the touch screen to your XiO Cloud account. For more information, refer to the [Device Assistant](#) page.

Use of the service requires a registered XiO Cloud account. To register for an XiO Cloud account, refer to www.crestron.com/Support/Tools/Licensing-Registration/XiO-Account-Registration.

To connect the device to the XiO Cloud service:

1. Record the MAC address and serial number that are labeled on the shipping box or the device. The MAC address and serial number are required to add the device to the XiO Cloud service.

NOTE: If the device has multiple MAC addresses, use the wired Ethernet MAC address.

2. Log in to your XiO Cloud account at portal.crestron.io.
3. Claim the device to the XiO Cloud service as described in the [XiO Cloud User Guide](#).

Web Configuration


The TSS-880 and TSS-1080 may be monitored and configured using their web configuration interface. The interface can be accessed via the device IP address as described in [Access the Web Configuration Interface on page 99](#).

NOTE: A similar version of the web configuration interface is provided within the XiO Cloud service. Navigate to the room associated with the device in the XiO Cloud environment tree to view the device status and settings. Additionally, certain settings can be configured for multiple devices at once at the group level. For more information, refer to the [XiO Cloud User Guide](#).


The **Status** tab is shown with the **Device** accordion open by default. The web configuration interface is shown below:

The web configuration interface provides the following tabs for navigating the interface:

- **Status:** Used to monitor device status. Refer to [Status on page 106](#).

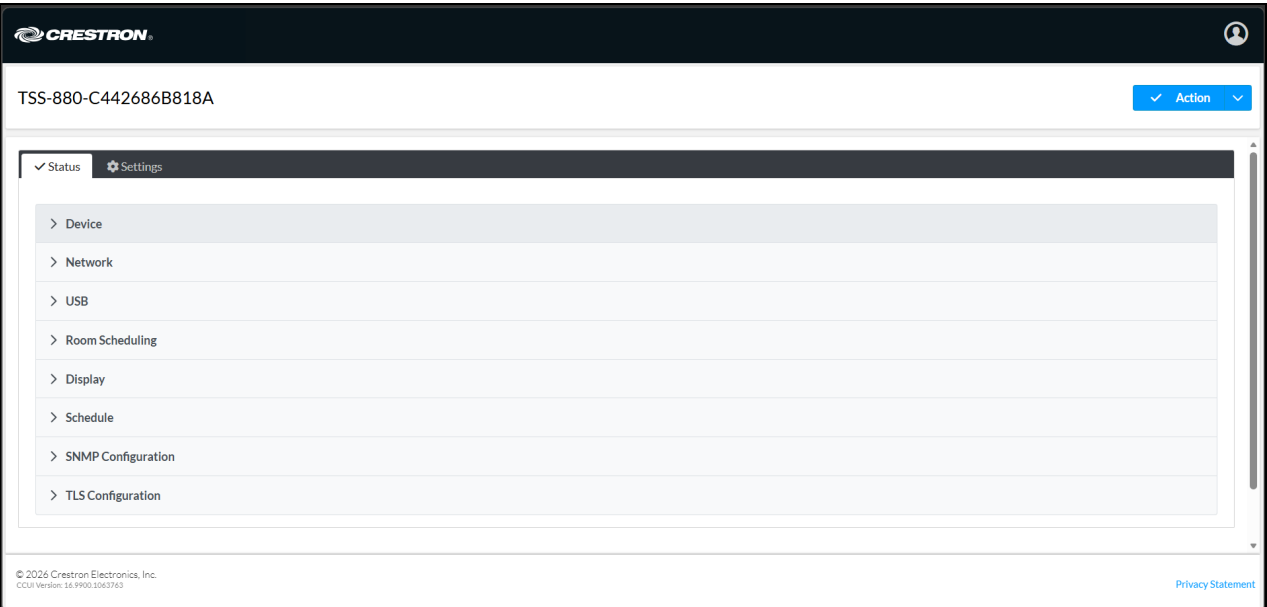

- **Settings:** Used to configure device settings. Refer to [Settings on page 114](#).

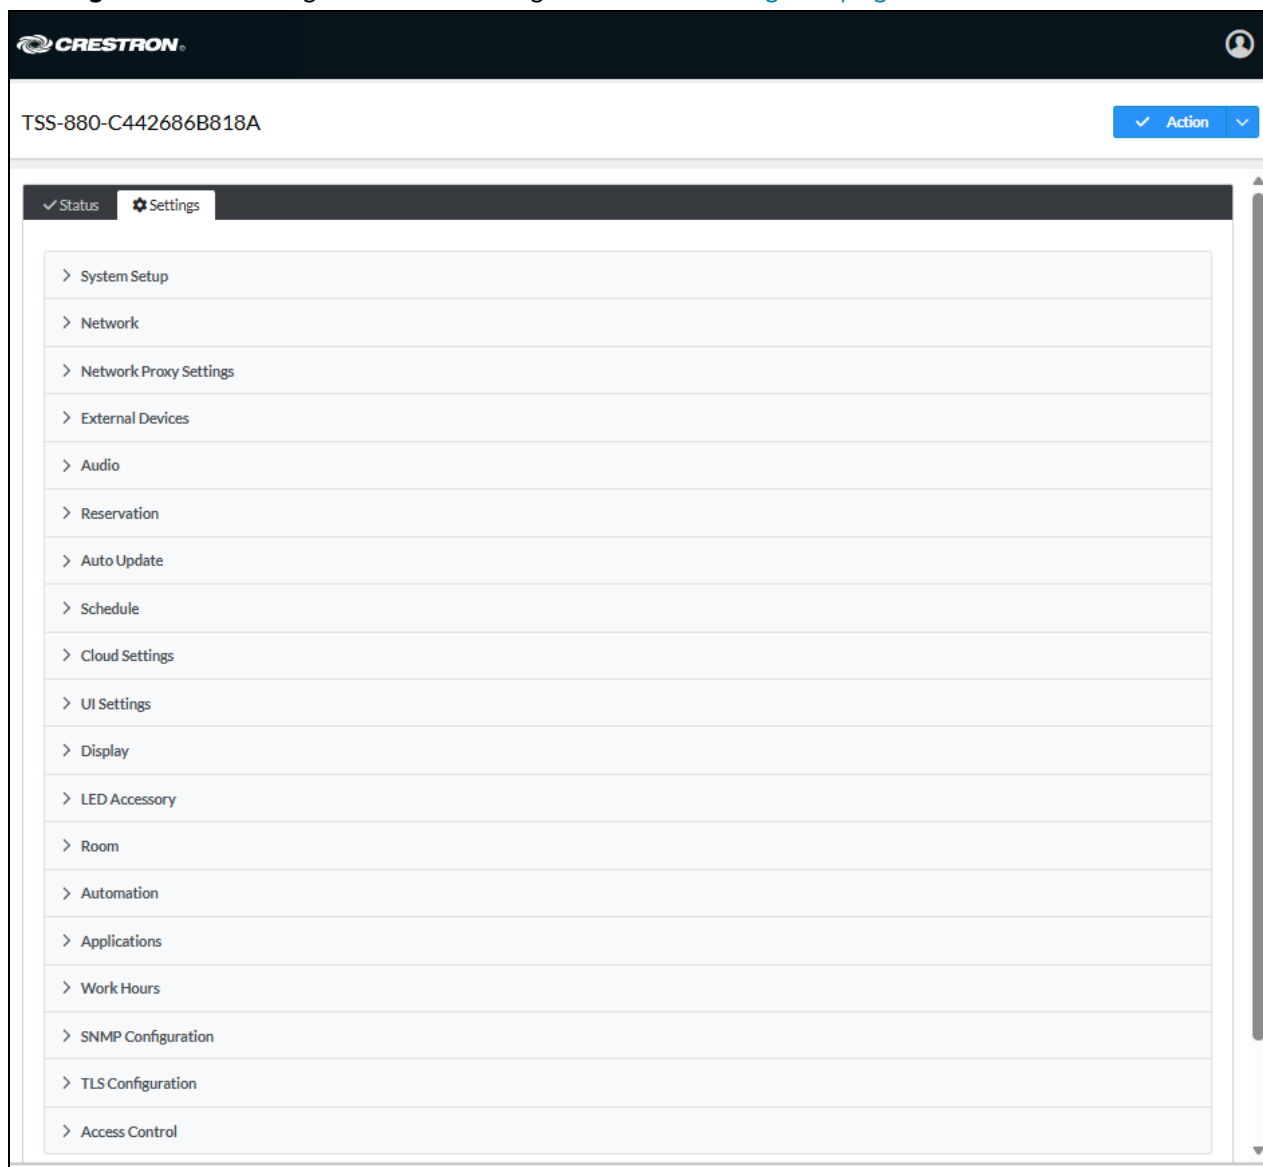

NOTE: Some device settings may be displayed or hidden depending on the selected application mode.


The following controls are also provided on the top right of the web configuration interface:

- Use the **Action** drop-down menu to perform various configuration actions. For more information, refer to [Action Menu on page 103](#).
- Select the profile button to view the active device user and to sign out of the web configuration utility.

Each section of the web configuration interface is described in the sections that follow.

Action Menu

The configuration interface provides an **Action** drop-down menu on the top right of the page. The **Action** menu may be accessed at any time.

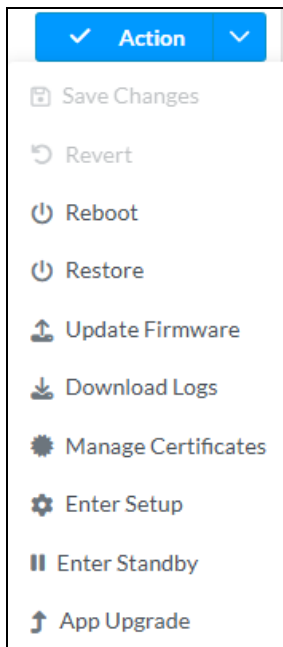

Once any changes have been made to the touch screen configuration, the **Action** button changes to a **Save Changes** button. Select **Save Changes** to save changes to the configuration settings.

If a restart is required after changes have been saved, a dialog box is displayed asking whether the restart should be performed. Select **Yes** to restart the device or **No** to cancel the restart.

The **Action** menu provides the following selections.

Save Changes

Select **Save Changes** to save any changes made to the configuration settings.

Revert

Select **Revert** to revert the touch screen back to the last saved configuration settings.

Reboot

Select **Reboot** to restart the touch screen.

After **Reboot** is selected, a dialog box is displayed asking whether the touch screen should be restarted. Select **Yes** to restart the device or **No** to cancel the restart.


Restore

Select **Restore** to restore the touch screen configuration settings to their default values.

After **Restore** is selected a dialog box is displayed asking whether the device settings should be restored. Select **Yes** to restore the settings or **No** to cancel the restore.

Update Firmware

Select **Update Firmware** to upgrade the touch screen firmware manually with a downloaded PUF (package update file).

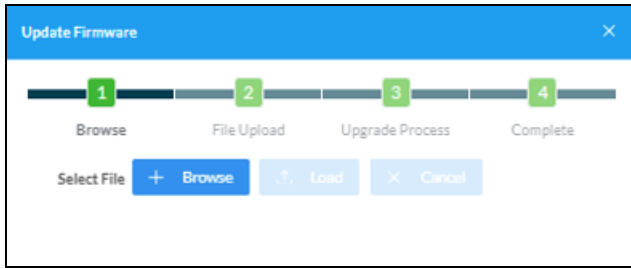

To upload a firmware PUF through the web configuration interface:

NOTE: Visit the appropriate device product page or www.crestron.com/Support/Resource-Library to download the latest firmware PUF.

1. Select **Browse**, and then navigate to the firmware PUF on the host computer.
2. Select the firmware PUF, and then select **Open**.
3. Select **Load** to load the PUF to the touch screen. The upload progress is shown in the dialog box.
4. Once the touch screen has completed the firmware upgrade, select **OK**.

Select the **x** button to close the **Firmware Upgrade** dialog box at any time during the upgrade process. Selecting the **x** button before the PUF is uploaded to the touch screen cancels the upgrade.

Download Logs


Select **Download Logs** to download the touch screen message logs for diagnostic purposes. The message files download as a compressed .tgz file. Once the compressed file is downloaded, extract the message log files to view them.

Manage Certificates


Select **Manage Certificates** to manage any certificates that are installed on the touch screen.

To add a certificate:

1. Navigate to the applicable tab (**Root**, **Intermediate**, **Machine**, **Web Server**, or **Client**) and select **Add Certificate**.

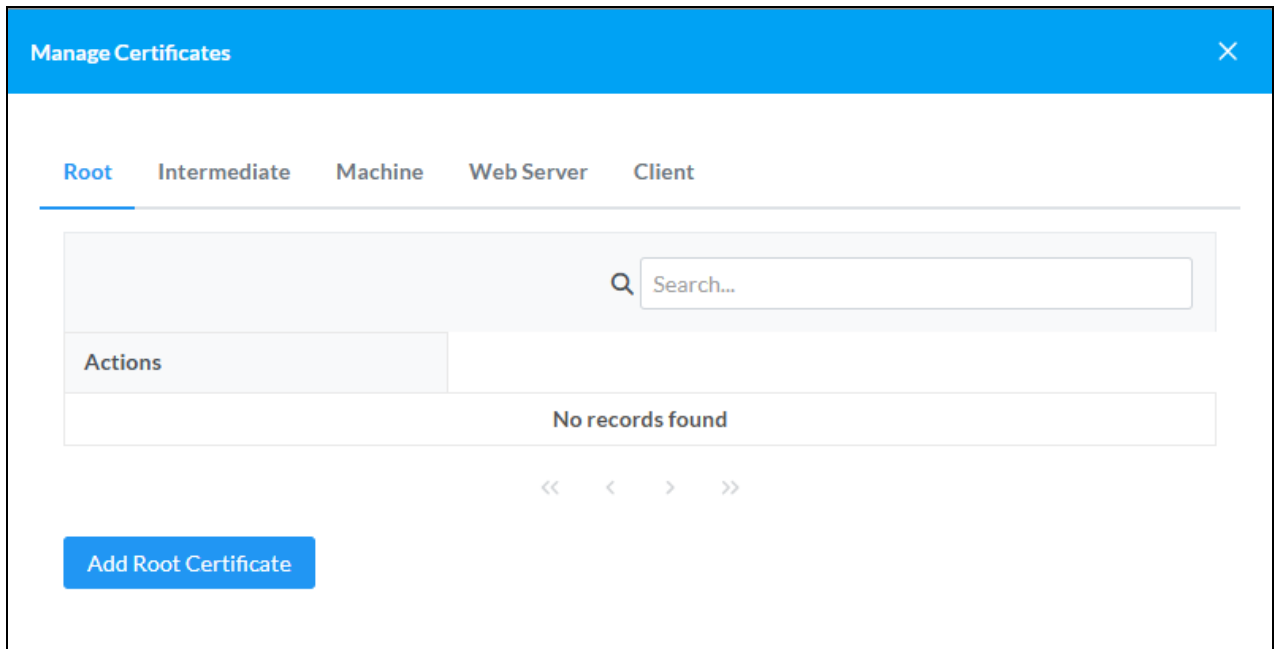

2. Select **Browse**, and then navigate to the desired certificate on the host computer.

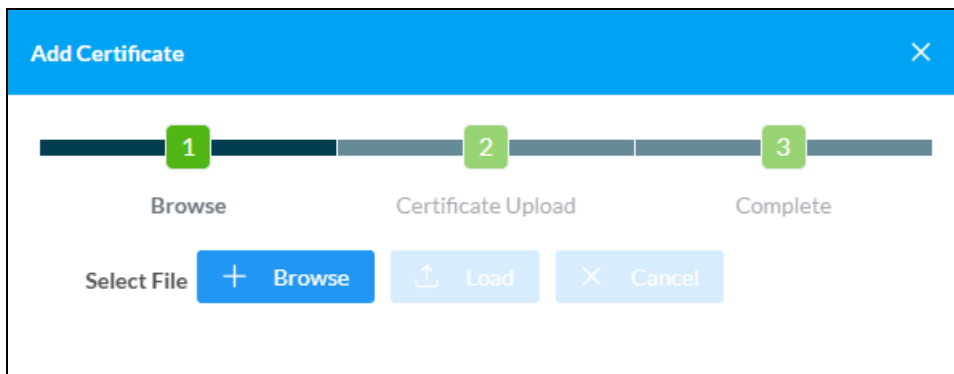

3. Select the certificate, and then select **Open**.
4. Select **Load** to load it to the touch screen. The upload progress is shown in the dialog box.
5. Once the touch screen has completed the certificate upload, select **OK**.

Enter Setup

Select **Enter Setup** to have the touch screen enter its built-in setup interface.

Enter Standby

Select **Enter Standby** to force the touch screen to enter standby mode.


App Upgrade

Select **App Upgrade** to update the currently selected application. The update progress is shown in a pop-up window.

Once the update is complete, select **OK** to close the pop-up window.

Status

Select the **Status** tab on the top left of the configuration interface to display selections for viewing the status of device, network, and control system settings.

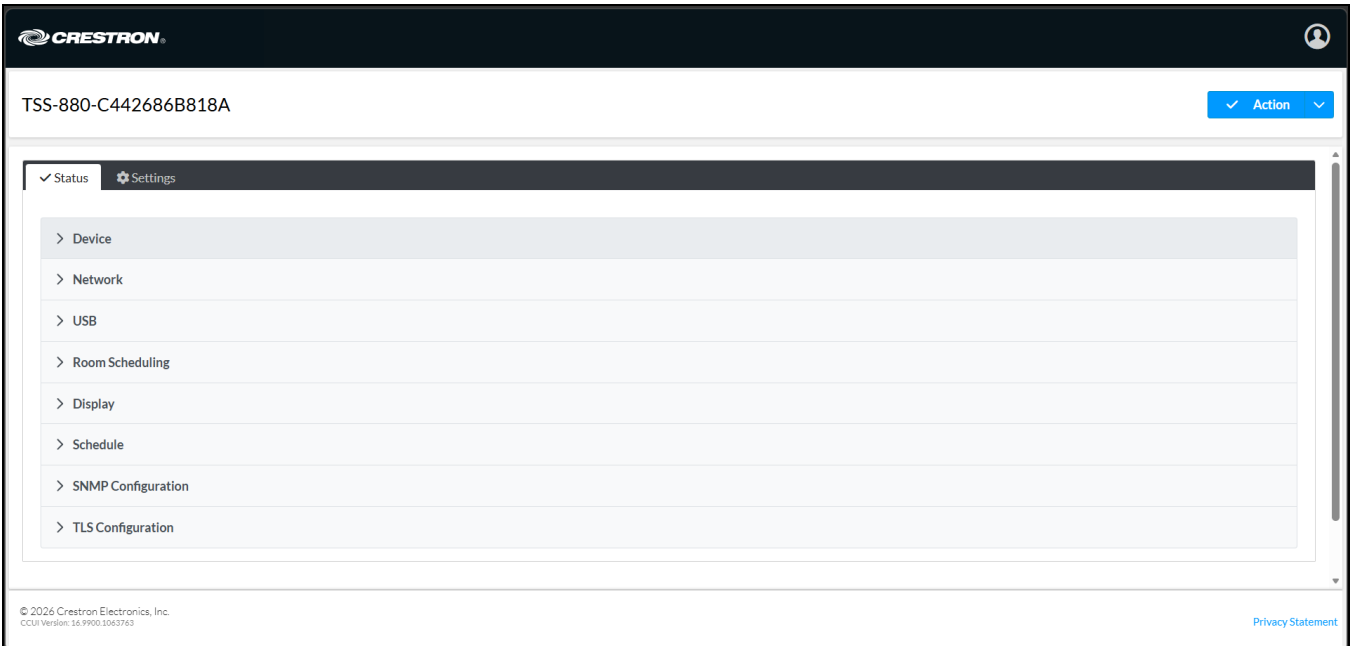

Select on a selection name to expand the selection. If the selection is expanded, select the selection name again to collapse the section.

Each selection is described in the sections that follow.

Device

Select **Device** to view general device information.

✓ Status

⚙ Settings

▼ Device

Model

TSS-880

Serial Number

Firmware Version

— More Details

— HDCP2X-SKE

TSS-880

Build

Mon 23 Mar 2026 04:14:09 AM UTC (0.2603.2200871)

Updater

1.000.00001

Bootloader

N/A

CCUI Version

16.9900.1063763

XIOSDK

3.9.0

IoTSDK

1.14.0

Product ID

0x6FFA

Revision ID

0x0000

CPU ID

0x0000

HDCP2X-SKE

HDCP2X-SKE [v9.0000.00000,#0123456789]

PRE-BOOT

[v9.0000.00000]

BOOTLOADER

[v9.0000.00000]

UUID

8bb9f3ab-be12-41d9-ae2-62bbee2ec6d7

PUF

Unknown

OOTBVersion

1.4.9

Video Player

5.0

Scheduling

1.3.9.018

MDEP Version

TPBA.251030.034

Secure Boot Enabled

False

Android verified boot state

orange

Android Webview

141.0.7390.123

Eng Debug Mode

True

Forced Auth Mode

True

Partner IMAGE BUILD TS

1774233064

FIPS Mode

True

The following **Device** information is displayed:

- **Model:** The touch screen model name
- **Serial Number:** The touch screen serial number
- **Firmware Version:** The firmware version loaded onto the touch screen

Select **+ More details** at the bottom of the Device tab to display an expanded section that shows additional touch screen information. If **+ More Details** is selected, select **- Less details** to collapse the section.

Network

Select **Network** to view the status of the network settings for the touch screen.

Network

HostnameTSS-880-C442686B818A

IPv6 EnabledNo

IPv4

DNS Servers

Primary LAN

IPv4

Domainnodomain

DHCP EnabledOn

IP Address

Subnet Mask255.255.0.0

Default Gateway0.0.0.0

Link ActiveTrue

MAC Addressc4.42.68.6b.81.8a

WiFi

IPv4

Domainnodomain

Link ActiveFalse

MAC Address

LAN

Network Proxy SettingsDisabled

The following Network information is displayed:

- **Host Name:** The touch screen host name
- **IPv6 Enabled:** Reports whether IPv6 addressing is turned on (**Yes**) or not (**No**)
- **DNS Servers:** The DNS (domain name server) addresses used to resolve the touch screen domain to an IPv6 address

Select the + (plus) icon next to Primary LAN to display the following Ethernet settings:


- **Domain:** The touch screen domain name
- **IPv4:** Contains settings for IPv4 Ethernet addressing
 - **DHCP Enabled:** Reports whether the IPv4 Ethernet address is static (**Yes**) or dynamic (**No**)
 - **IP Address:** The touch screen IPv4 Ethernet address, shown only if an Ethernet connection is active
 - **Subnet Mask:** The touch screen subnet mask address, shown only if an Ethernet connection is active
 - **Default Gateway:** The gateway router address, shown only if an Ethernet connection is active
 - **Link Active:** Reports the status of the Ethernet connection (A **true** message indicates that the Ethernet connection is active, while a **false** message indicates that the Ethernet connection is inactive.)
 - **MAC Address:** The unique MAC (media access control) address for the Ethernet adapter
- Select the + (plus) icon next to **Wi-Fi** to display the following Wi-Fi network settings:
 - **Domain:** The Wi-Fi network domain name
 - **Link Active:** Reports the status of the Wi-Fi network connection (A **true** message indicates that the Wi-Fi network connection is active, while a **false** message indicates that the Wi-Fi network connection is inactive.)
 - **MAC Address:** The unique Wi-Fi network MAC (media access control) address

Select the + (plus) icon next to **LAN** to display the following LAN settings:

- **Network Proxy Settings:** Reports whether network proxy settings are turned on or off for the touch screen

USB

Select **USB** to view the status of a connected USB accessory.

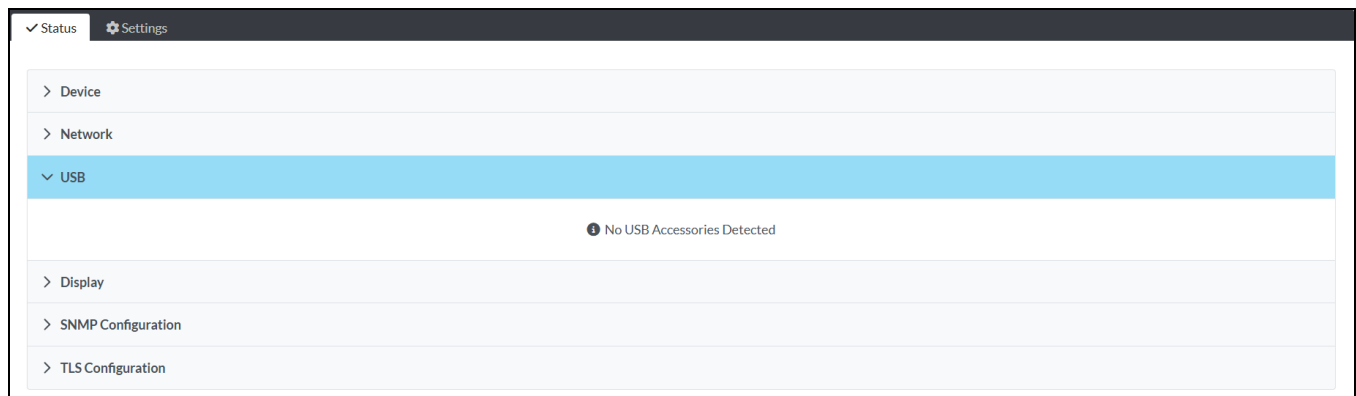

The following USB information is displayed (if a USB accessory is detected by the touch screen):

- **Accessory Connected:** The name of the connected accessory
- **Accessory Type:** The type of connected accessory

Room Scheduling

Select **Room Scheduling** to see the following information.

Room Scheduling	
Room Status	Offline
Calendar Sync	Not Synced

- **Room Status:** The online or offline status of the connected conference room
- **Calender Sync:** The status of the room and touch screen's calendar

Display

Select **Display** to view the display status. The **Display Status** field indicates the display status (on or standby).

Status Settings	
Device	
Network	
USB	
Display	
Display Status	On
SNMP Configuration	
TLS Configuration	

Schedule

Navigate to **Schedule** for schedule connection status.

▼ Schedule

Connection Status

N/A

Connection Status Message

Occupancy Status

Unknown

Occupancy Source

Local

Push Registration Status

Not Supported

— Google

Google Registration Status

Not Registered

Google Registration Request

Register Now

— Current Meeting

Meeting Info

Scheduled

No Meeting is scheduled at this time

Subject

Start Time

End Time

Recurring

Organizer

Attendees

Name	Required
No records found	

Check In Status

No

Meeting Privacy Level

The following **Schedule** information is displayed:

- **Connection Status:** The connection status of any synced schedules
- **Connection Status Message:** Displays a custom connection status message
- **Occupancy Status:** The status of any connected occupancy sensors
- **Occupancy Source:** Reports a local or external occupancy sensor
- **Push Registration Status:** Reports whether or not the device can interface with authentication push notifications

Depending on the status of the Google Calendar registration, the following Google information may be displayed.

Expand the Select the + (plus) icon next **Google** and **Current Meeting** to display further information:

- **Google Registration Status:** Indicates the registration status between the touch screen and Google Calendar

- **Google Registration Request:** If the touch screen is not registered with Google Calendar, displays a **Register Now** button for requesting a connection to Google Calendar

NOTE: If the touch screen is registered with Google Calendar, an **Unregister** button is displayed instead. Select this button to unregister the touch screen with Google Calendar.

- **Google Registration URL:** If a Google Calendar registration has been requested, displays a URL used to register the touch screen with Google Calendar
- **Google Registration Code:** If a Google Calendar registration has been requested, displays a unique code used to register the touch screen with Google Calendar

SNMP Configuration

Select **SNMP Configuration** to view the status of the SNMP (Simple Network Management Protocol) configuration for the touch screen.

User Name	Manager Name	Version	Write Access Level	Address	Authentication Protocol	Privacy Protocol
No records found						

The following SNMP Configuration information is displayed:

- **SNMP Enabled:** Reports whether SNMP has been turned on for the touch screen (**Yes**) or not (**No**)
- **SNMP Allow All:** Reports whether the touch screen allows SNMP requests from all managers (**Yes**) or not (**No**)
- **Trap Enabled:** Reports whether SNMP trap notifications have been turned on (**Yes**) or not (**No**)
- Each SNMP user configured for the touch screen is displayed in a table with the following information:
 - **User Name:** The name of the SNMP user
 - **Manager Name:** The SNMP manager for the user
 - **Version:** The SNMP version set for the user
 - **Write Access Level:** Indicates whether the user has write level permissions (**true**) or read-only permissions (**false**)
 - **Address:** The IP address of the SNMP manager
 - **Authentication Protocol:** The authentication protocol used by the SNMP manager
 - **Privacy Protocol:** The privacy protocol used by the SNMP manager

TLS Configuration

Select **TLS Configuration** to view the TLS (Transport Layer Security) configuration settings for the touch screen.

The screenshot shows the 'TLS Configuration' screen. At the top, there is a blue header with a dropdown arrow and the text 'TLS Configuration'. Below the header, the settings are displayed in a light gray box. The first section shows 'TLS Supported Versions' set to 'TLS1.2,TLS1.3'. The second section shows 'Encrypt Connection' set to 'No'. The third section, titled 'Server Certificate Verifications' with a minus icon, contains three settings: 'Disable trust list verification' set to 'Yes', 'Disable DNS host name verification' set to 'Yes', and 'Disable extended key usage verification' set to 'Yes'.

▼ TLS Configuration	
TLS Supported Versions	TLS1.2,TLS1.3
Encrypt Connection	No
— Server Certificate Verifications	
Disable trust list verification	Yes
Disable DNS host name verification	Yes
Disable extended key usage verification	Yes


The following TLS information is displayed:

- **TLS Supported Version:** Displays the supported TLS versions
- **Encrypt Connection:** Reports if the TLS connection is encrypted
- Select the + (plus) icon next to **Server Certificate Verification** to display the following settings:
 - **Disable trust list verification:** Reports whether the touch screen disabled trusted device verification (**Yes**) or not (**No**)
 - **Disable DNS host name verification:** Reports whether the touch screen disabled host name verification (**Yes**) or not (**No**)
 - **Disable extended key usage verification:** Reports whether the touch screen disabled the extended key usage certificate extension (**Yes**) or not (**No**)

Settings

Select the **Settings** tab on the top left of the configuration interface to display selections for configuring various touch screen settings and to select a touch screen application.

NOTE: Some settings are model dependent and cannot be configured on the TSS-880-GV and TSS-1080-GV.

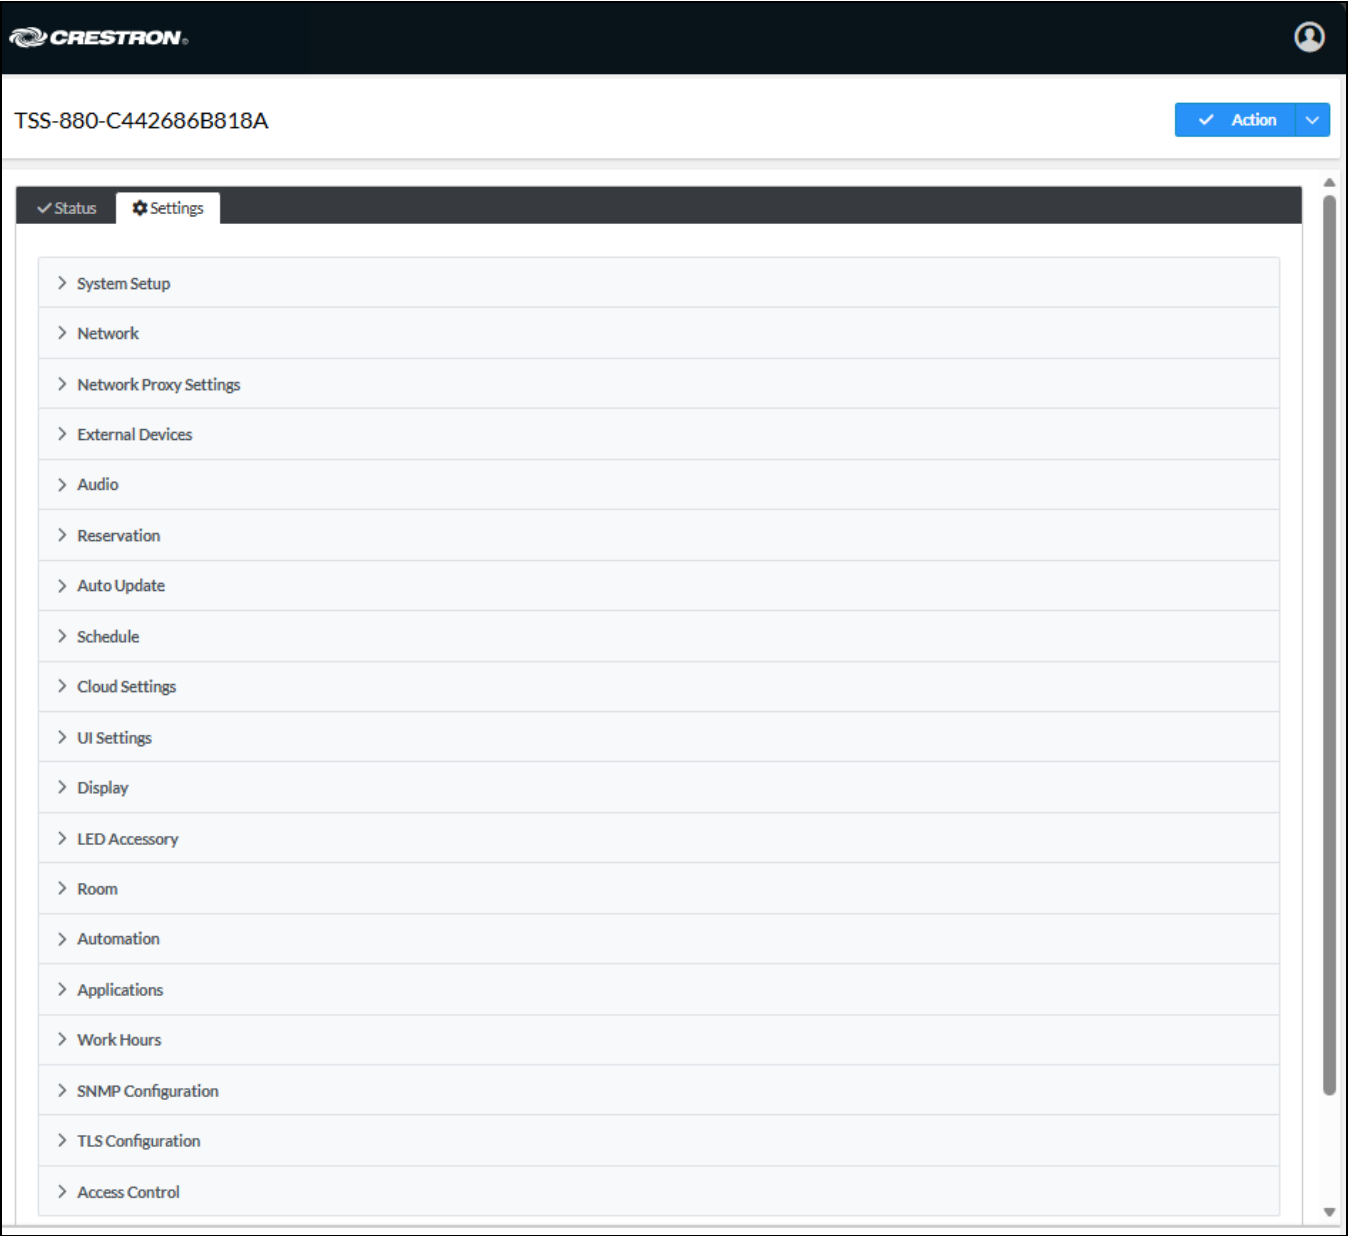

Each selection is described in the sections that follow.

System Setup

Select **System Setup** to configure general network and touch screen settings.

Date/Time


Select the + (plus) icon next to **Date/Time** to display the following time and date settings.

Turn on the toggle to use time synchronization via SNTP (Simple Network Time Protocol).

- **Synchronize Now:** With **Time Synchronization** turned on, select **Synchronize Now** to synchronize the touch screen with the SNTP server(s) entered in the NTP Time Servers table.
- Select **Add** to add a new SNTP server entry into the table.

- Enter the following information for each entry:
 - Enter the SNTP server address into the **Address** text field.
 - Enter the SNTP server port into the **Port** text field.
 - Use the **Authentication Method** drop-down menu to select the authentication method used to access the SNTP server (if one exists).
 - If an authentication method is selected, enter the key used to authenticate against the SNTP server into the **Authentication Key** text field.
 - If an authentication method is selected, enter the ID for the key used to authenticate against the SNTP server into the **Key ID** text field.
- **NTP Time Servers:** With **Time Synchronization** turned on, use the provided table to enter information regarding the SNTP server(s) used to synchronize the date and time for the touch screen.
- To remove an entry, fill the checkbox to the left of the table entry, and then select **Remove**.

Time Configuration:

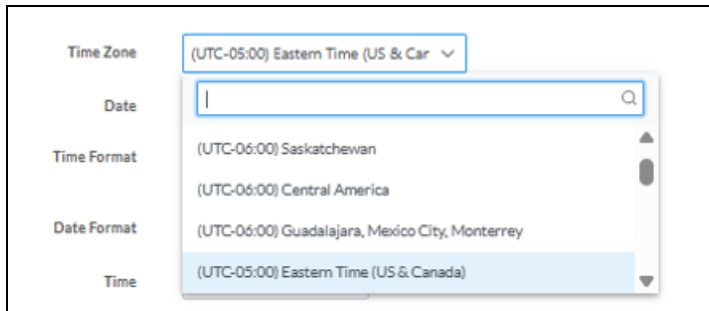

The screenshot shows a configuration window with a list of settings on the left and a corresponding dropdown menu on the right. The settings listed are Time Zone, Date, Time Format, Date Format, and Time. The Time Zone dropdown is open, showing a list of time zones. The selected option is (UTC-05:00) Eastern Time (US & Car). The other options in the list are (UTC-06:00) Saskatchewan, (UTC-06:00) Central America, (UTC-06:00) Guadalajara, Mexico City, Monterrey, and (UTC-05:00) Eastern Time (US & Canada).

Setting	Value
Time Zone	(UTC-05:00) Eastern Time (US & Car)
Date	
Time Format	
Date Format	
Time	

- **Time Zone:** Select a time zone for the touch screen using the drop-down menu.
- **Date:** Select the date for the touch screen using the pop-up calendar that is displayed.
- **Time Format:** Select the format that the time will display on the touch screen (12 hour or 24 hour).
- **Date Format:** Select the format that the date will display on the touch screen using the drop-down menu.
- **Time:** Select the time for the touch screen (in 24-hour format) using the pop-up menu that is displayed.

Device Display

Select the + (plus) icon next to **Device Display** to display the following device display settings.

System Setup

Date/Time

Device Display

Proximity

Button Toolbar

Device Display

LCD

Auto Brightness

Brightness *

Setup

Local Setup Sequence

Screensaver and Standby

Standby Timeout *

Screensaver Enabled

24 Hour Digital Clock Enabled

Outdoor Temperature Enabled

Indoor Temperature Enabled

Date Enabled

Date Format

Brightness *

Text Color *

Text Outline Color *

Text Font Face

Header Text Line 1

Header Text Line 2

Header Text Justification *

Header Text Bidirectional Text Direction *

Background Image URL

Video URL

Logo Setting

Logo URL


- **LCD**
 - **Auto Brightness:** Turn on the toggle to use automatic brightness control for the touch screen LCD display.
 - **Brightness:** If **Auto Brightness** is turned off, enter a value (1–100%) for the LCD display brightness.
- **Setup**
 - **Local Setup Sequence:** Turn on the toggle to allow local access to the settings screens using a five-finger press.
- **Screensaver and Standby**
 - **Standby Timeout:** Enter a standby timeout duration (1–120 minutes) for the touch screen.
 - **Screensaver Enabled:** Turn on the toggle to show a screensaver on the touch screen during standby timeout.
 - **24 Hour Digital Clock Enabled:** Turn on the toggle to display a 24-hour digital clock on the touch screen during standby timeout.
 - **Outdoor Temperature Enabled:** Turn on the toggle to display the outdoor temperature on the touch screen during standby timeout via a join from a control system.
 - **Indoor Temperature Enabled:** Turn on the toggle to display the indoor temperature on the touch screen during standby timeout via a join from a control system.
 - **Date Enabled:** Turn on the toggle to display the date on the touch screen during standby timeout.
 - **Date Format:** Use the drop-down menu to select a format for displaying the date on the touch screen.
 - **Brightness:** Enter a brightness value (1–100%) for the screensaver.
 - **Text Color:** Select the color icon to the right of this field to display a pop-up window for selecting the text color of the screensaver, or enter a hex value for a specific color.
 - **Text Outline Color:** Select the color icon to the right of this field to display a pop-up window for selecting the text outline color of the screensaver, or enter a hex value for a specific color.
 - **Text Font Face:** Use the drop-down menu to select a font for the screensaver text.
 - **Header Text Line 1:** Enter text to be displayed on the first header text line of touch screen screensaver.
 - **Header Text Line 2:** Enter text to be displayed on the second header text line of touch screen screensaver.
 - **Header Text Justification:** Select one of the radio buttons (**Left**, **Center**, or **Right**) to select how the header text is justified on the touch screen screensaver.
 - **Header Text Bidirectional Text Direction:** Select one of the radio buttons (**Left-To-Right** or **Right-To-Left**) to determine the language text direction on the touch screen screensaver.
 - **Background Image URL:** Enter a URL of a background image to be used by the touch screen screensaver.
 - **Video URL:** Enter a URL of video to be used by the touch screen screensaver.

- **Logo Setting:** Select one of the radio buttons (**None**, **Crestron**, and **Custom**) to select a logo type to use on the touch screen screensaver.
- **Logo URL:** If **Logo Setting** is set to **Custom**, enter a URL of a custom logo to be used by the touch screen screensaver.

Proximity

Select the **+** (plus) icon next to **Proximity** to display the following proximity settings.

NOTE: This feature is unavailable on -GV models.

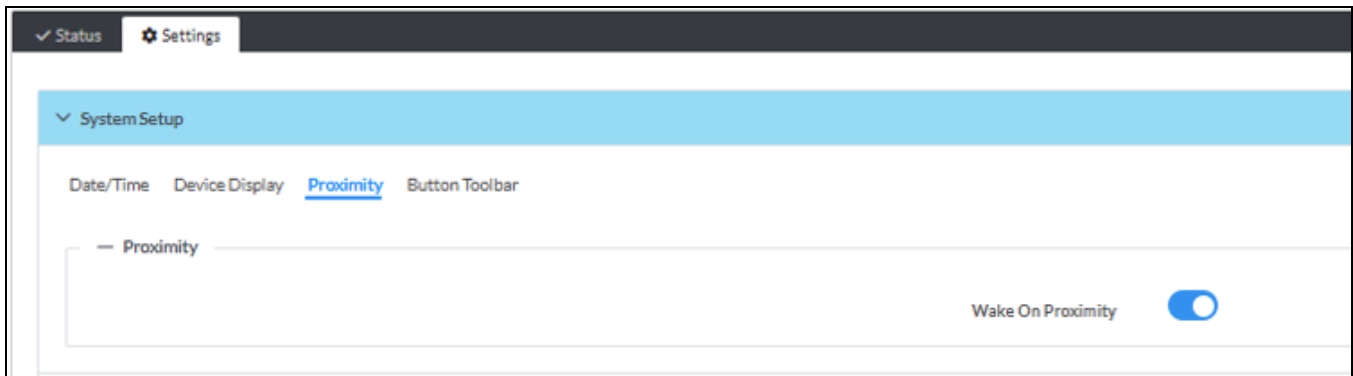

Turn on the **Wake On Proximity** toggle wake the touch screen automatically when a user enters the touch screen proximity field.

Button Toolbar

Select the **+** (plus) icon next to **Button Toolbar** to display the following virtual toolbar button settings.

The screenshot shows the 'Settings' tab with 'System Setup' expanded. The 'Button Toolbar' sub-menu is selected. The settings for the Button Toolbar are as follows:

- Show On Wake ***: A toggle switch that is currently turned off.
- Display Edge ***: A group of four radio buttons for 'Top', 'Bottom', 'Left', and 'Right'. The 'Top' radio button is selected.
- Auto Hide Timeout ***: A numeric input field containing the value '5', followed by a 'Seconds' label and up/down arrow controls.

- **Show On Wake:** Turn on the toggle to show the virtual toolbar when the touch screen wakes from standby timeout.
- **Display Edge:** Select a radio button (**Top**, **Bottom**, **Left**, or **Right**) to select the position on the touch screen where the virtual toolbar is displayed.
- **Auto Hide Timeout:** Select a duration (in seconds) that must elapse before the virtual toolbar is hidden automatically.

Network

Select **Network** to configure network settings for the touch screen.

The screenshot shows the 'Network' settings page. The 'IPv4' section is expanded, showing the following fields:

- Hostname ***: A text field containing 'TSS-880-C442686B818A'.
- IPv6 Enabled**: A toggle switch that is currently turned off, with a small orange information icon to its right.
- Primary Static DNS**: A text field with a dotted pattern.
- Secondary Static DNS**: A text field with a dotted pattern.

Below the IPv4 section, there are three expandable sections, each with a plus icon and a label:

- + Primary LAN**
- + WiFi**
- + 802.1x Configuration**

NOTE: The **IP Address**, **Subnet Mask**, and **Default Gateway** fields are required only if DHCP is turned off for Ethernet and Wi-Fi network connections.

- **Hostname:** Enter the touch screen host name.
- **IPv6 Enabled:** Turn on the toggle to use IPv6 addressing for the touch screen.
- **Primary Static DNS:** If **IPv6 Enabled** is turned on, enter the primary DNS address used to resolve the touch screen domain to an IPv6 address.
- **Secondary Static DNS:** If **IPv6 Enabled** is turned on, enter the secondary DNS address used to resolve the touch screen domain to an IPv6 address.

Select the + (plus) icon next to **Primary LAN** to display the following Ethernet settings:

— Primary LAN

IPv4

Adapter Enabled ☒

Domain * CP4N-00107FEB1321.creston

DHCP Enabled ☒

IP Address * 172.22.43.237

Subnet Mask * 255.255.0.0

Default Gateway * 172.22.0.2

- **Adapter Enabled:** Turn on the toggle to use the touch screen Ethernet adapter, which allows the touch screen to make an Ethernet connection.
- **Domain:** Enter the fully qualified domain name on the network.
 - **DHCP:** Turn on the toggle to use DHCP for the IPv4 Ethernet connection.
 - **NOTE:** If DHCP is turned on, IP does not function until a reply has been received from the server. The touch screen broadcasts requests for an IP address periodically.
 - **IP Address:** Enter the touch screen IPv4 Ethernet address on the network.
 - **Subnet Mask:** Enter the touch screen subnet mask address on the network.
 - **Default Gateway:** Enter the gateway router address on the network.

Select the + (plus) icon next to **Wi-Fi** to display the following Wi-Fi network settings:

NOTE: This feature is unavailable on -GV models.

— WIFI

Adapter Enabled ☒

Domain *

IPv4

DHCP Enabled ☒

IP Address *

Subnet Mask *

Default Gateway *

- **Adapter Enabled:** Turn on the toggle to use the touch screen Wi-Fi adapter, which allows the touch screen to make a Wi-Fi network connection.
- **Domain:** Enter the fully qualified domain name on the network.
 - **DHCP:** Turn on the toggle to use DHCP for the IPv4 Wi-Fi network connection.

NOTE: If DHCP is turned on, IP does not function until a reply has been received from the server. The touch screen broadcasts requests for an IP address periodically.

- **IP Address:** Enter the touch screen IPv4 Wi-Fi network address on the network.
- **Subnet Mask:** Enter the touch screen subnet mask address on the network.
- **Default Gateway:** Enter the gateway router address on the network.
- **Wi-Fi Access Points**

WiFi Access Points

Select Discovered Access Points

CTI
Crestron Secure
CrestronWIFI
Crestron_Guest
Crestron_Pyng
Crestron_Training
DIRECT-AS-HP PageWide Pro 452dw
DIRECT-AM-3200-WF-16d450
DIRECT-AM-3200-WF-7068ba
DIRECT-AM-3200-WF-73db02
DIRECT-NJ-DUMONT
...

Scan WiFi Access Points

The maximum configurable access points are limited to 4


☐	SSID	Encryption Key	Password	Active	Actions
+	Add	X	Remove		

- **Select Discovered Access Points:** Select an access point after completing a scan. Enter text in the search field to search for a specific Wi-Fi access point name.
- **Add Access Points:** Adds the chosen access point entry from the **Select Discovered Access Points** field to the table below.

Each added Wi-Fi access point is displayed in a table that contains the following information.

- **SSID:** Enter or modify the SSID (name) of the Wi-Fi access point.
- **Encryption Key:** Select the security/encryption type used by the Wi-Fi access point.
- **Password:** Enter the password used to connect to the Wi-Fi access point.
- **Active Access Point:** Indicates whether a connection to the Wi-Fi access point is active


Select **Add** to open the **Connect to Access Point** pop-up window. Enter the **SSID** information and Security Mode and select **OK** to add a new entry to the Wi-Fi access point table.

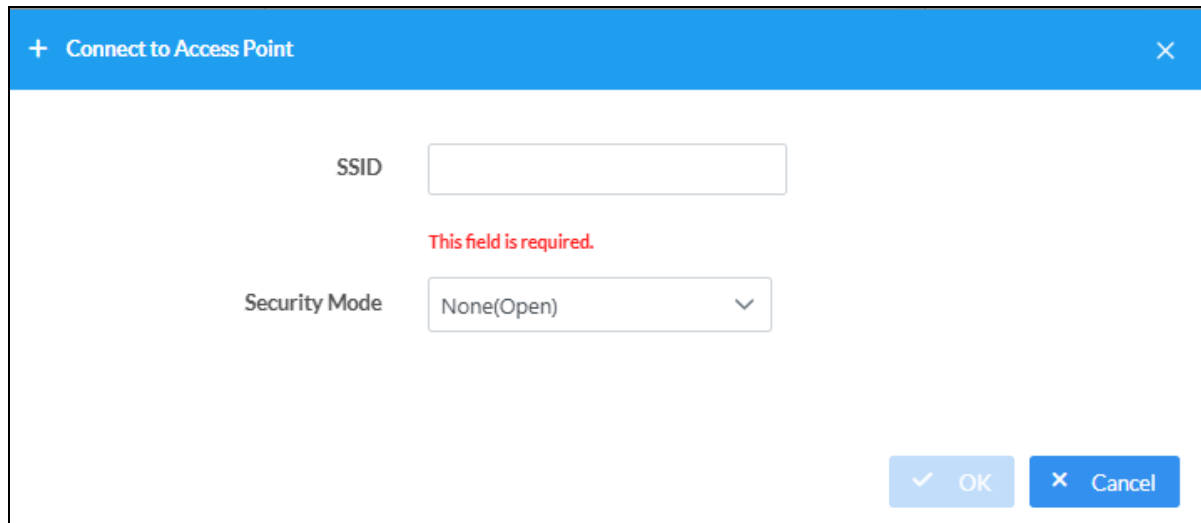

The image shows a pop-up window titled "Connect to Access Point" with a blue header bar containing a plus icon and a close icon. The main area is white and contains two input fields. The first field is labeled "SSID" and is empty. Below it, a red error message reads "This field is required." The second field is labeled "Security Mode" and has a dropdown menu with "None(Open)" selected. At the bottom right, there are two buttons: "OK" with a checkmark icon and "Cancel" with an X icon.

After selecting one more entries in the Wi-Fi access point table, select **Remove** to delete the selected entries.

Select the **+** (plus) icon next to **802.1x Configuration** to display the following settings:

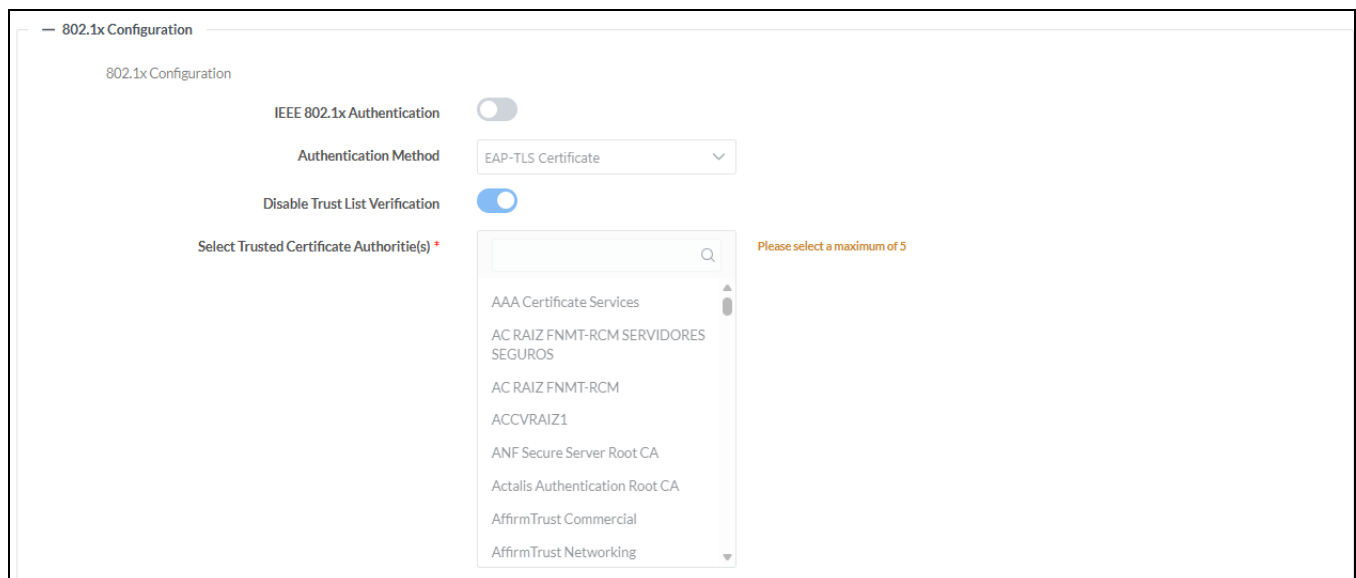

The image shows the "802.1x Configuration" settings page. The title bar says "802.1x Configuration". The main content area has a light gray background. There are four settings: "IEEE 802.1x Authentication" with a toggle switch, "Authentication Method" with a dropdown menu showing "EAP-TLS Certificate", "Disable Trust List Verification" with a toggle switch, and "Select Trusted Certificate Authoritie(s) *" with a search box and a list of certificate authorities. The list includes "AAA Certificate Services", "AC RAIZ FNMT-RCM SERVIDORES SEGUROS", "AC RAIZ FNMT-RCM", "ACCVRAIZ1", "ANF Secure Server Root CA", "Actalis Authentication Root CA", "AffirmTrust Commercial", and "AffirmTrust Networking". A note on the right says "Please select a maximum of 5".

- **IEEE 802.1x Authentication:** Turn on the toggle to use 802.1X authentication for the touch screen.
- **Authentication Method:** Select an 802.1X authentication method (**EAP-TLS Certificate** or **EAP MSCHAP V2- password**) from the drop-down menu.

NOTE: In FIPS mode, password authentication should not be used.

- **Select Trusted Certificate Authorities:** Select trusted CAs (Certificate Authorities) from the provided CAs to be used for server validation.

Select **Manage Certificates** from the **Action** menu to add or remove CAs from the list.

Network Proxy Settings

Select **Network Proxy Settings** to configure network proxy settings for the touch screen.

- **Proxy:** Turn on the toggle to configure the touch screen for use with a proxy server.
- **HTTP Settings**

Network Proxy Settings

HTTP Settings HTTPS Settings Proxy Allow

Proxy ☐

HTTP Settings

HTTP Proxy ☐

HTTP Proxy Address *

HTTP Proxy Port * 1

Username

Password

- **HTTP Proxy:** Turn on the toggle to use an HTTP proxy server.
- **HTTP Proxy Address:** Enter the IP address of the HTTP proxy server.
- **HTTP Proxy Port:** Enter the port number of the HTTP proxy server.
- **Username:** Enter the username required for the HTTP proxy server.
- **Password:** Enter the password required for the HTTP proxy server.


- **HTTPS Settings**

The screenshot displays the 'Network Proxy Settings' window. At the top, there is a blue header bar with a dropdown arrow and the text 'Network Proxy Settings'. Below this, there are three tabs: 'HTTP Settings', 'HTTPS Settings' (which is selected and underlined in blue), and 'Proxy Allow'. In the center, there is a 'Proxy' toggle switch that is currently turned off. Below the 'Proxy' toggle, there is a section titled 'HTTPS Settings' with a minus sign icon to its left. Inside this section, there is an 'HTTPS Proxy' toggle switch, also turned off. Below the toggle, there are four input fields: 'HTTPS Proxy Address *' (with a red asterisk), 'HTTPS Proxy Port *' (with a red asterisk and a value of '1'), 'Username', and 'Password'. Each input field has a small blue icon to its right.

- **HTTPS Proxy:** Turn on the toggle to use an HTTPS proxy server.
- **HTTPS Proxy Address:** Enter the IP address of the HTTPS proxy server.
- **HTTPS Proxy Port:** Enter the port number of the HTTPS proxy server.
- **Username:** Enter the username required for the HTTPS proxy server.
- **Password:** Enter the password required for the HTTPS proxy server.

- **Proxy Allow**

- **Proxy:** Turn on to use an additional proxy server.

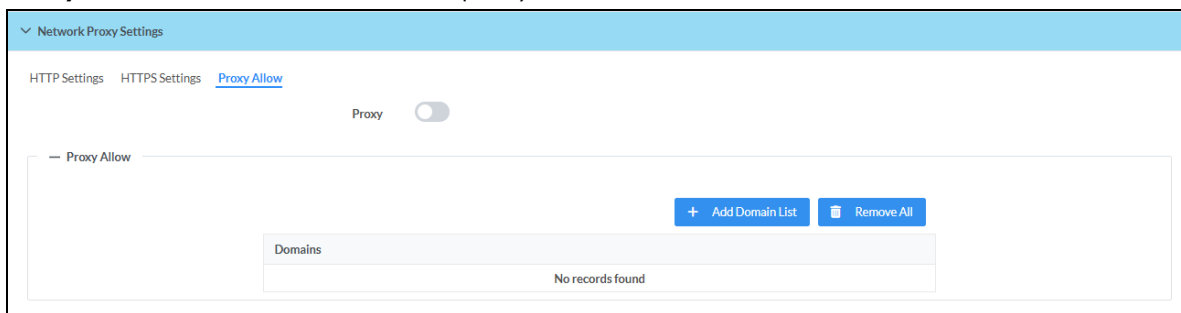

Network Proxy Settings

HTTP Settings HTTPS Settings Proxy Allow


Proxy ☐

Proxy Allow

+ Add Domain List Remove All

Domains
No records found

- Select **Add Domain List** or **Remove All** to add or remove domains to the proxy list.

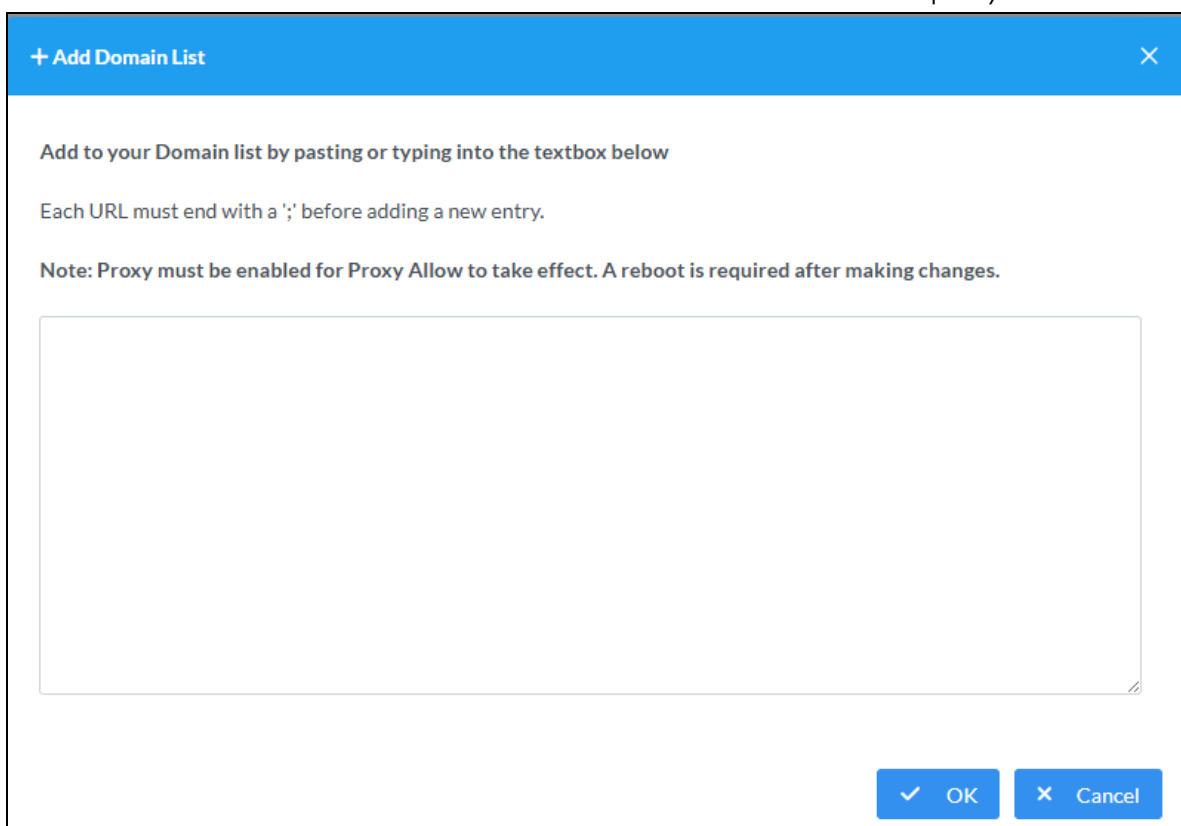

+ Add Domain List

Add to your Domain list by pasting or typing into the textbox below

Each URL must end with a ';' before adding a new entry.

Note: Proxy must be enabled for Proxy Allow to take effect. A reboot is required after making changes.

OK Cancel

- Add all domain URLs into the text field as a semicolon-delimited list.
- Select **OK**.

External Devices

Select **External Devices** to configure settings for pairing the touch screen to accessories or other devices.

External Devices

External Devices

+ Add Device

Occupancy Sensor

Name	Hostname	Device Model	MAC Address	Serial Number	IP Address	Status	Actions
No devices paired							

NOTE: Bluetooth devices cannot be connected to -GV models.

Select **Add Device** to add any conferencing devices or occupancy sensors to the touch screen. Only one device may be paired at a time.

- If connecting an occupancy sensor, select **Add Device** above **Occupancy Sensor**.

+
Add Device

Occupancy Sensor

Name *

Enter Name

Device IP Address / FQDN *

Enter IP Address or FQDN

Pairing Retry Time *

1
Minutes

Username *

Enter Username

Password *

Enter Password

✓ Save

✕ CANCEL

- Enter the **Device Name**, **IP Address**, **Username** and **Password**.
- Use the arrows to increase or decrease the device's pairing retry timeout.
- Select **Save**.

Audio

Select **Audio** to configure various audio settings for the touch screen.

▼
Audio

Device Audio

Panel Mute

Panel Volume

75
%

Media Mute

Media Volume

100
%

- **Panel Mute:** Turn on the toggle to mute the main touch screen volume.
- **Panel Volume:** Enter a value (1–100) for the main touch screen volume level.
- **Media Mute:** Turn on the toggle to mute the touch screen media volume.
- **Media Volume:** Enter a value (1–100) for the touch screen media volume level.

Reservation

Select Reservation to configure reservation settings.

The screenshot shows the 'Reservation' settings page with the 'General' tab selected. The settings include:

- Max Reservation Length:** 120 Minutes
- Min Reservation Length:** 30 Minutes
- Reserve Now Even End Time:** Off (toggle)
- Reservation Enabled:** On (toggle)

- **General Settings:**
 - **Max Reservation Length:** Use the text field or arrows to increase or decrease the maximum reservation length.
 - **Min Reservation Length:** Use the text field or arrows to increase or decrease the minimum reservation length.
 - **Reserve Now Even End Time:** Turn on or off to enable reserve now end times.
 - **Reservation Enabled:** Turn on or off to enable reservations.
- **End Early:**

The screenshot shows the 'Reservation' settings page with the 'End Early' tab selected. The settings include:

- End Early:** Minutes (dropdown menu)
- Minutes Before End Early:** 10 Minutes
- Percent Before End Early:** 5 %

- **End Early:** Change **End Early** units from either **Off**, **Minutes**, or **Percentage**.
- **Minutes before End Early:** Use the text field or arrow keys to increase or decrease the end early time. This unit will enable depending on **End Early** settings above.
- **Percent before End Early:** Use the text field or arrow keys to increase or decrease the end early time. This unit will enable depending on **End Early** settings above.

- **Extend Reservation:**

The screenshot shows a web-based configuration interface for 'Reservation' settings. At the top, there is a blue header bar with a dropdown arrow and the text 'Reservation'. Below this, there are three tabs: 'General', 'End Early', and 'Extend Reservation', with the latter being the active tab. The main content area is titled 'Extend Reservation' and contains three settings: 1. 'Extend Reservation' with a dropdown menu currently set to 'Minutes'. 2. 'Show Extend Meeting Minutes' with a numeric input field set to '15' and a unit selector set to 'Minutes'. 3. 'Show Extend Meeting Percent' with a numeric input field set to '25' and a unit selector set to '%'. Each numeric input field has small up and down arrow buttons for adjustment.

- **Extend Reservation:** Change **Extend Reservation** units from either **Off**, **Minutes**, or **Percentage**.
- **Show Extended Meeting Minutes:** Use the text field or arrow keys to increase or decrease the extended minutes. This unit will enable depending the settings above.
- **Show Extended Meeting Percent:** Use the text field or arrow keys to increase or decrease the extended minutes. This unit will enable depending the settings above.

Auto Update

Select **Auto Update** to configure automatic firmware updates for the touch screen.

The screenshot shows the 'Auto Update' configuration panel. At the top, there's a blue header with a dropdown arrow and the text 'Auto Update'. Below this, there are three settings: 'Auto Update' with a blue toggle switch turned on, 'Custom URL' with a grey toggle switch turned off, and 'Custom URL Path' with a text input field containing 'https://U2-A0F5097BFFD5.CP4N-0010'. Below these settings is a section titled 'Schedule' with a minus icon and a dropdown arrow. Inside the 'Schedule' section, there are three settings: 'Day of Week' with a dropdown menu showing 'Daily', 'Time of Day' with a text input field showing '02:35 AM', and 'Poll Interval' with a text input field showing '0' and the unit 'Minutes'. At the bottom of the 'Schedule' section is a blue button labeled 'Update Now'.

NOTE: The **Auto Update** accordion can be used to configure auto update settings for firmware only. Automatic application updates are not affected by these settings.

- **Auto Update:** Turn on the toggle to use automatic firmware updates.
- **Custom URL:** Turn on the toggle use a custom update server URL. If turned off, the server URL will default to the standard Crestron update sever.
- **Custom URL Path:** If **Custom URL Path** is turned on, enter the custom URL path for the update server.
- **Day of Week:** Select the day of week when the touch screen will check for updates. Select Daily to have the touch screen check for updates every day.
- **Time of Day:** Enter a time of day (in 24-hour format) when the touch screen will check updates on the scheduled day.
- **Poll Interval:** Enter the polling interval (in hours) for when the touch screen will poll the server for updates.
- Select **Update Now** to check the update server for new firmware and to update the touch screen immediately if new firmware is available.

Schedule

Select **Schedule** to configure room scheduling settings.

The screenshot shows the 'Schedule' configuration panel. At the top, there's a blue header with a dropdown arrow and the text 'Schedule'. Below this, there are three settings: 'Polling Interval' with a text input field showing '5' and a unit 'Minutes', 'Custom Reserve Time' with a grey toggle switch turned off, and 'Schedule Source' with a dropdown menu showing 'Please select a provider'.

- **Polling Interval:** Use the text field or arrow keys to increase or decrease the polling interval in minutes.
- **Custom Reserve Time:** Use the button to turn **Custom Reserve Time on** or **off**.
- **Schedule Source:** Select your calendar or scheduling provider through the drop-down menu.

Cloud Settings


Select **Cloud Settings** to enable or disable a connection between the touch screen and an XiO Cloud® service account. A connection to the XiO Cloud service is enabled by default after completing the Setup Wizard.



The screenshot shows the 'Cloud Settings' section of a configuration interface. At the top, there is a blue header with a dropdown arrow and the text 'Cloud Settings'. Below this, there is a sub-header 'Cloud Settings' with a minus sign. The main content area contains a single setting: 'Cloud Configuration Service Connection' with a blue toggle switch that is currently turned on.

UI Settings

Select **UI Settings** to configure the touch screen user interface.

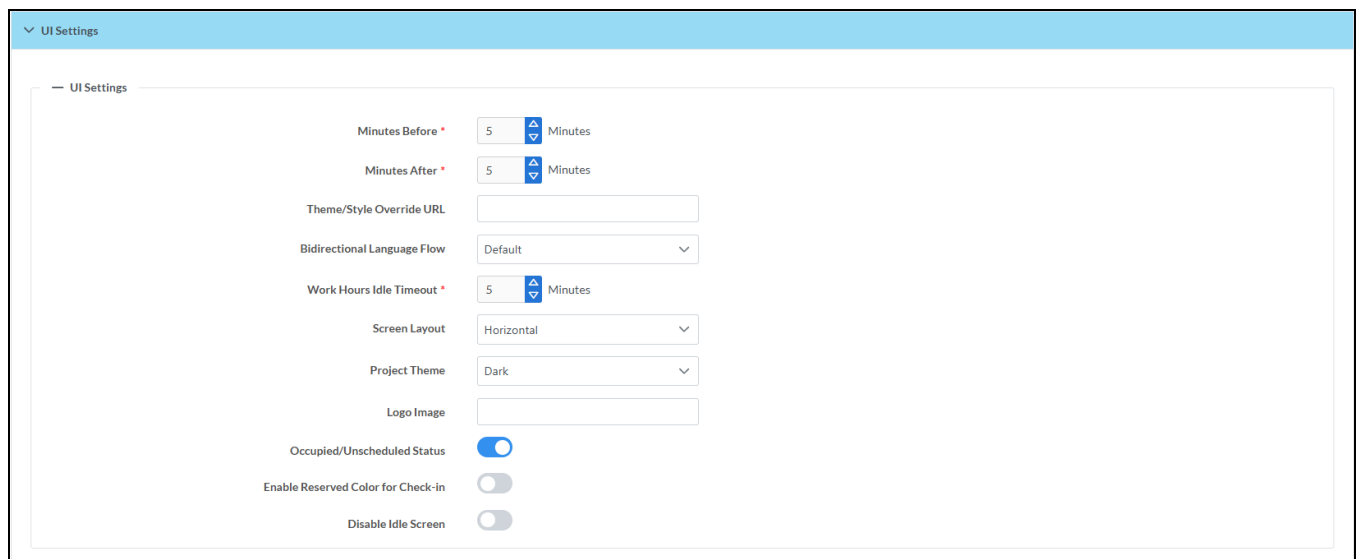

The screenshot shows the 'UI Settings' section of a configuration interface. It has a blue header with a dropdown arrow and the text 'UI Settings'. Below this is a sub-header 'UI Settings' with a minus sign. The settings are organized into a list:


- 'Minutes Before' with a value of 5 and up/down arrow controls, followed by the word 'Minutes'.
- 'Minutes After' with a value of 5 and up/down arrow controls, followed by the word 'Minutes'.
- 'Theme/Style Override URL' with an empty text input field.
- 'Bidirectional Language Flow' with a dropdown menu showing 'Default'.
- 'Work Hours Idle Timeout' with a value of 5 and up/down arrow controls, followed by the word 'Minutes'.
- 'Screen Layout' with a dropdown menu showing 'Horizontal'.
- 'Project Theme' with a dropdown menu showing 'Dark'.
- 'Logo Image' with an empty text input field.
- 'Occupied/Unscheduled Status' with a blue toggle switch that is turned on.
- 'Enable Reserved Color for Check-in' with a grey toggle switch that is turned off.
- 'Disable Idle Screen' with a grey toggle switch that is turned off.

- **Minutes Before:** Use the arrow keys to increase or decrease the minute count.
- **Minutes After:** Use the arrow keys to increase or decrease the minute count.
- **Theme/Style Override URL:** Enter the URL of a custom theme here to change the display.
- **Bidirectional Language Flow:** Select the preferred language flow from **Default**, **LTR** (left to right), or **RTL** (right to left).
- **Work Hours Idle Timeout:** Use the arrow keys to increase or decrease the idle timeout.
- **Screen Layout:** Use the drop-down menu to change the screen layout from **Horizontal** to **Vertical**.
- **Project Theme:** Use the drop-down menu to change the theme from **Dark** to **Light**.
- **Logo Image:** Enter the URL of a custom logo.

- **Occupied/Unscheduled Status:** Use the button to turn **Occupied/Unscheduled** status **on** or **off**.
- **Enable Reserved Color for Check-In:** Use the button to turn reserved colors **on** or **off**.
- **Disable Idle Screen:** Use the button to **enable** or **disable** the idle screen.

Display

Select **Display** to configure touch screen display settings.

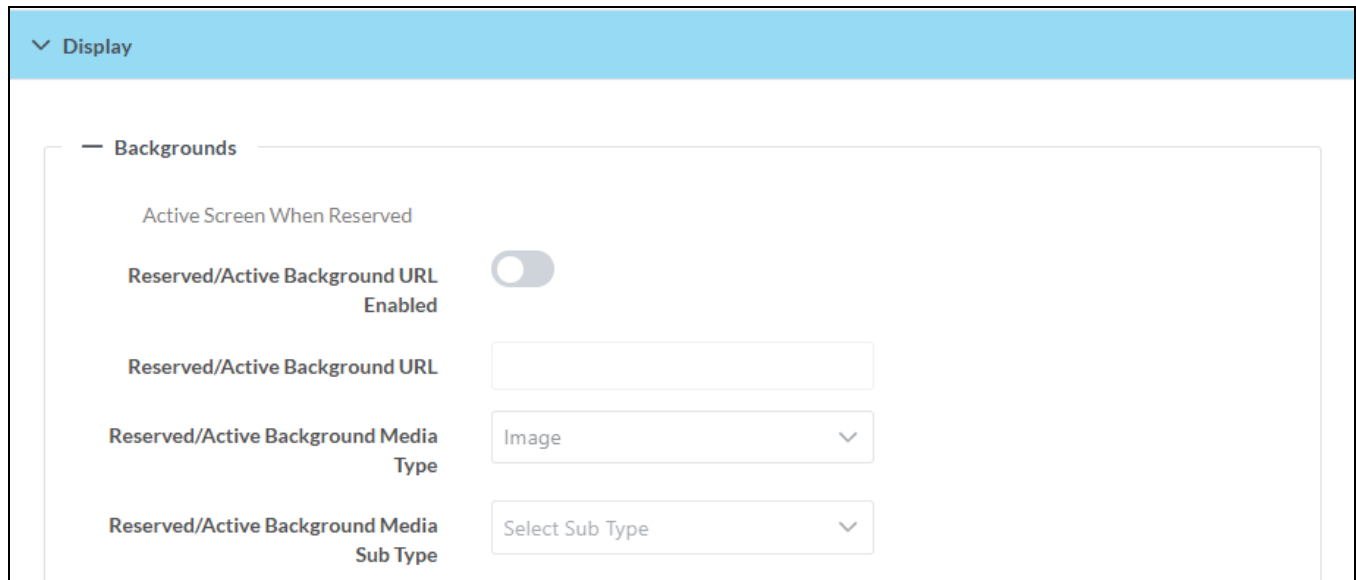

The screenshot shows a web interface for configuring display settings. At the top is a blue header bar with a dropdown arrow and the text "Display". Below this is a section titled "Backgrounds" with a minus sign icon. Inside this section, there are five configuration items:

- Active Screen When Reserved:** A toggle switch that is currently turned on (blue).
- Reserved/Active Background URL Enabled:** A label with a toggle switch that is currently turned on (blue).
- Reserved/Active Background URL:** A text input field.
- Reserved/Active Background Media Type:** A dropdown menu with "Image" selected.
- Reserved/Active Background Media Sub Type:** A dropdown menu with "Select Sub Type" selected.

- **Reserved/Active Background URL Enabled:** Use the button to enable or disable Reserved/Active Background.
- **Reserved/Active Background URL:** Once enabled, add the preferred background's URL.
- **Reserved/Active Background Media Type:** Use the drop-down menu to select the media type from **Image** or **Video**.
- **Reserved/Active Background Media Sub Type:** If a video is used for the background, use the drop-down menu to select the video's file type.

The above configurations are available for the following background scenarios:

- **Active Screen When Reserved:**
- **Idle Screen When Reserved**
- **Active Screen When Available**
- **Idle Screen When Available**
- **Active Screen When Available and Occupied**
- **Idle Screen When Available and Occupied**

LED Accessory

Select **LED Accessory** to display the following settings.

The screenshot shows the 'LED Accessory' settings panel. At the top, there is a blue header bar with a dropdown arrow and the text 'LED Accessory'. Below the header, there are two toggle switches: 'Enable LEDs' (which is turned on) and 'Custom LED colors' (which is turned off). Under the 'Custom LED colors' toggle, there is a section titled 'Custom Color Values'. This section contains nine horizontal sliders, each with a label on the left and a percentage value on the right. The sliders are arranged in three groups of three. The first group shows 'Available Red LED Brightness' at 0%, 'Available Green LED Brightness' at 100%, and 'Available Blue LED Brightness' at 0%. The second group shows 'Reserved Red LED Brightness' at 100%, 'Reserved Green LED Brightness' at 0%, and 'Reserved Blue LED Brightness' at 0%. The third group shows 'Available Occupied Red LED Brightness' at 0%, 'Available Occupied Green LED Brightness' at 0%, and 'Available Occupied Blue LED Brightness' at 100%.

Setting	Value
Enable LEDs	On
Custom LED colors	Off
Available Red LED Brightness	0%
Available Green LED Brightness	100%
Available Blue LED Brightness	0%
Reserved Red LED Brightness	100%
Reserved Green LED Brightness	0%
Reserved Blue LED Brightness	0%
Available Occupied Red LED Brightness	0%
Available Occupied Green LED Brightness	0%
Available Occupied Blue LED Brightness	100%

- **Enable LEDs:** Use the button to enable or disable LEDs.
- **Custom LED Colors:** Use the button to enable or disable custom colors.
- **Custom Color Values:** Toggle on or off **Custom Color Values** to configure custom colors for LED accessories. Use the sliders to set RGB color values (from 0–100%) for different occupancy states (**Available**, **Reserved**, and **Available Occupied**).

Room

Select **Room** to display the following settings.

- **General:**
 - **Privacy Level:** Use the drop-down menu to select between **Public**, **Semi-Private**, or **Private** privacy settings.
 - **Room Name:** Enter the preferred room name.
 - **Offline Indication Time:** Use the arrows to increase or decrease the offline indication timeout in hours.
- **Privacy and Security:**
 - **Panel Security:** Use the drop-down menu to select between **Anonymous** or **Touch Screen PIN**.
 - **Panel PIN:** If **Touch Screen PIN** is enabled, enter the desired PIN.
- **Availability Threshold:**
 - **Enable Availability Threshold:** Use the button to enable or disable the availability threshold.
 - **Availability Threshold:** Use the arrows to increase or decrease the availability threshold in minutes.

Automation

Select the tab to configure the behavior of automated settings for the scheduling application.

The screenshot shows the 'Automation' tab in a scheduling application. It is divided into two main sections: 'Decline for No Show' and 'Check-in'. The 'Decline for No Show' section includes a toggle for 'Decline for No Show' (currently off), a numeric input for 'Decline reservations up to' (set to 120) with up/down arrows and a 'Minutes' label, a numeric input for 'Expiration Time' (set to 15) with up/down arrows and a 'Minutes' label, and a toggle for 'Decline at Exact Minute' (currently off). The 'Check-in' section includes a toggle for 'Require Check-in' (currently off), a numeric input for 'Check-in Time' (set to 5) with up/down arrows and a 'Minutes' label, and a numeric input for 'Check-in End' (set to 5) with up/down arrows and a 'Minutes' label.

- **Decline for No Show:**

- **Decline for No Show:** Use the button to **enable** or **disable** the decline for no show option.
- **Decline reservations up to:** Use the arrows to **increase** or **decrease** the threshold to decline reservations in minutes.
- **Expiration Time:** Use the arrows to **increase** or **decrease** the expiration time.
- **Decline at Exact Minute:** Use the button to **enable** or **disable** the decline at exact minute option.

- **Check-in:**

- **Require Check-in:** Use the button to **enable** or **disable** the mandatory check-in.
- **Check-in Time:** Use the arrows to **increase** or **decrease** the check-in time.
- **Check-in End:** Use the arrows to **increase** or **decrease** the check-in end.

Applications

Select **Applications** to view the currently running application.

Applications

Application Mode

User Project

Application Auto Update

Language

Language

English US

The **Application Mode** field displays the currently running touch screen application. Use the **Language** drop-down menu to switch between supported languages.

NOTE: Each application uses a unique setup procedure for registering and configuring the application.

Work Hours

Select **Work Hours** configure the auto on settings for the connected touch screen, which are triggered and controlled by a time range.

Work Hours			
Enable	Day	On Time	Off Time
	Monday	08:00	17:00
	Tuesday	08:00	17:00
	Wednesday	08:00	17:00
	Thursday	08:00	17:00
	Friday	08:00	17:00
	Saturday	08:00	17:00
	Sunday	08:00	17:00


During the set date and time range, the touch screen display remains on regardless of whether meetings are scheduled.

The following settings may be configured for each day of the week listed in the adjacent **Day** column:

- **Enable:** Turn on the toggle to use auto on controls for the chosen day of the week.
- **On Time:** Enter the time (in 24-hour format) that the connected touch screen display is turned on automatically for the chosen day of the week.
- **Off Time:** Enter the time (in 24-hour format) that the connected touch screen display is turned off automatically for the chosen day of the week.

SNMP Configuration

Select SNMP Configuration to configure SNMP (Simple Network Management Protocol) settings on the touch screen.

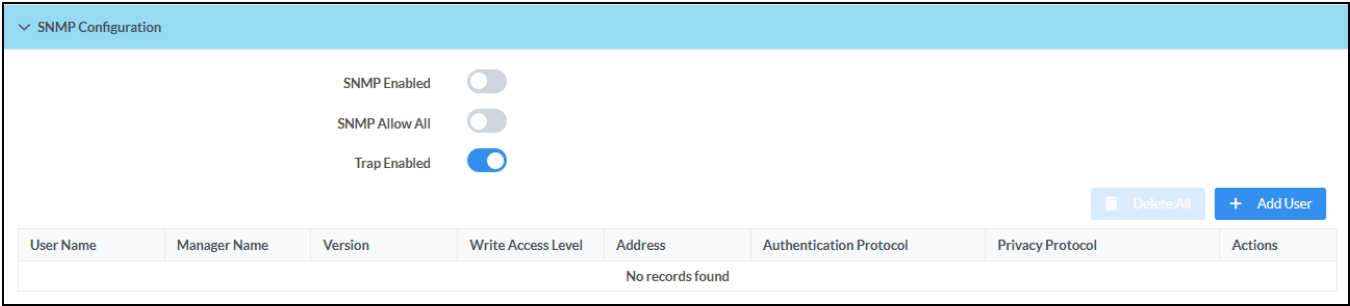

SNMP Enabled: Turn on the toggle to turn on SNMP for the touch screen.

- **SNMP Allow All:** Turn on the toggle to all the touch screen to receive SNMP requests from all managers.
- **Trap Enabled:** Turn on the toggle to turn on SNMP trap notifications.

Each added SNMP user is displayed in a table that contains the following information.

- **User Name:** The name of the SNMP user
- **Manager Name:** The SNMP manager for the user
- **Version:** The SNMP version set for the user
- **Write Access Level:** Indicates whether the user has write level permissions (**true**) or read-only permissions (**false**)
- **Address:** The IP address of the SNMP manager
- **Authentication Protocol:** The authentication protocol used by the SNMP manager
- **Privacy Protocol:** The privacy protocol used by the SNMP manager
- **Actions:** Controls for editing and deleting the SNMP user

Select **Delete All** to delete all existing SNMP users. When a dialog box is shown asking whether all SNMP users should be deleted, select **Yes**.

Select **Add User** to add a new SNMP user. Enter the following information for the SNMP user:

Add SNMP Configuration

Manager Name *

IP Address/Host Name *

Community Name *

Write Access Level

Please Select Access Level

SNMP Version *

Please Select SNMP Version

SNMP Authorization Protocol *

Please Select Authorization Protocol

SNMP Privacy Protocol *

Please Select Privacy Protocol

SNMP Security Password *

Password

SNMP Privacy Password *

Password

✓ OK

✗ CANCEL


- **Manager Name:** Enter the SNMP manager name for the user.
- **IP Address/Host Name:** Enter the IP address or host name of the SNMP manager.
- **Community Name:** Enter the SNMP community (user) name.
- **Write Access Level:** Use the drop-down menu to select whether the user has write level access (**True**) or read-only access (**False**).
- **SNMP Version:** Use the drop-down menu to select the SNMP version used by the manager.
- **SNMP Authorization Protocol:** If required, use the drop-down menu to select the authorization protocol used by the SNMP manager.
- **SNMP Privacy Protocol:** If required, use the drop-down menu to select the privacy protocol used by the SNMP manager.

- **SNMP Security Password:** If required, enter the security password for the SNMP manager.
- **SNMP Privacy Password:** If required, use the privacy password for the SNMP manager.


Select **OK** to create the new user. The user is added to the table within the **SNMP Configuration** table.

TLS Configuration

Select **TLS Configuration** to configure the TLS (Transport Layer Security) settings.

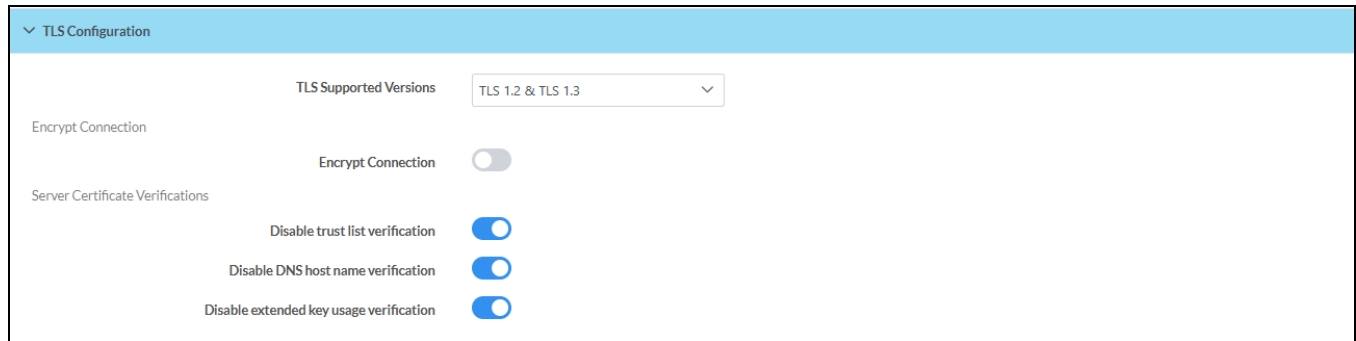


- **TLS Supported Version:** Use the drop-down menu to select the desired TLS version.

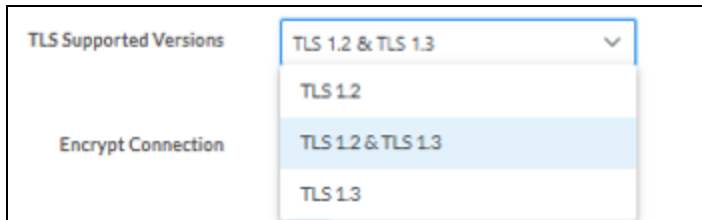

- **Encrypt Connection:** Use the drop-down menu to toggle TLS encryption.
- **Disable trust list verification:** Turn on the toggle to enable trusted device verification.
- **Disable DNS host name verification:** Turn on the toggle to enable host name verification.
- **Disable extended key usage verification:** Turn on the toggle to enable extended key usage certificate extensions.

Access Control

Select **Access Control** to display selections for configuring security and authentication settings for the touch screen.

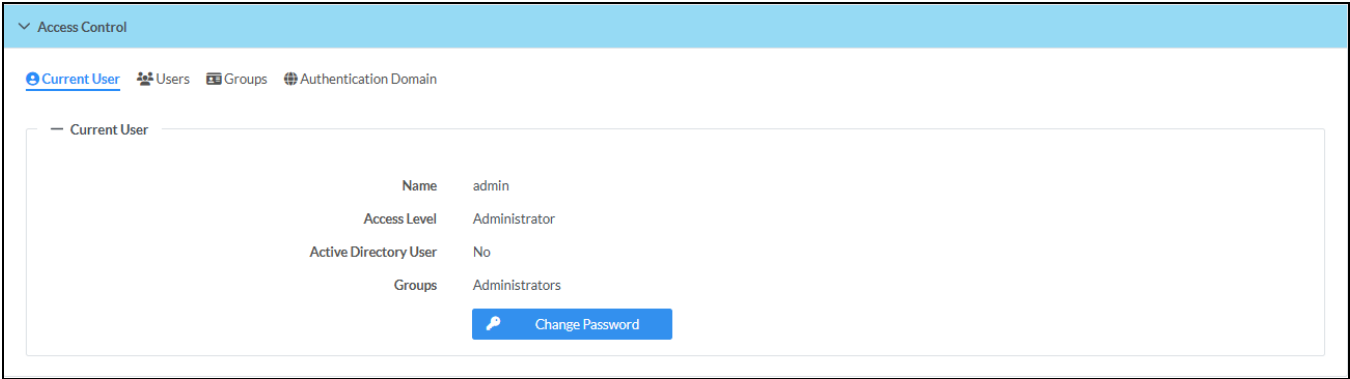

CAUTION: Do not lose the administrator username and password, as the touch screen settings must be restored to factory defaults to reset the username and password.

Use the following settings to add, delete, and edit touch screen users and groups.

Current User

Select the **Current User** tab to view and edit information for the current touch screen user. The following settings are displayed for the current user:

- **Name:** The chosen username
- **Access Level:** The access level granted to the user (**Administrator**, **Programmer**, **Operator**, **User**, or **Connect**)
- **Active Directory User:** Reports whether the current user is (**Yes**) or is not (**No**) authenticated through Active Directory® software

NOTE: A user must be added to an Active Directory group before the user may be selected as an active directory user. For more information, refer to [Web Configuration on page 101](#).

- **Groups:** Any groups of which the current user is a member

Select **Change Current User Password** to change the password for the current user.

Users

Select the **Users** tab to view and edit information for the touch screen users. Enter text into the **Search Users** field to find and display users that match the search term(s).

Access Control

Current User **Users** Groups Authentication Domain

Users

+ Add user

Global Filter

User Name ↑↓	Active Directory User ↑↓	Groups ↑↓	Actions
admin		Administrators	Edit User Delete

Touch screen users are listed in table format. The following information is displayed for each touch screen user:

- **Username:** The chosen username
- **Active Directory User:** Reports whether the user is (**Yes**) or is not (**No**) authenticated through Active Directory

NOTE: A user must be added to an Active Directory group before the user may be selected as an active directory user. For more information, refer to [Web Configuration on page 101](#).

Use **Add User** to add new user information.

+ Add user

User Name *

Active Directory User

Password *

Confirm New Password *

Groups *

OK CANCEL

Select **Edit User** to view or configured the following settings:

Edit User

User Name * admin

Active Directory User No

TAC Password Authorization ☒

Reset Password ☐ ⚠ This user will be forced to change their password at next login

Temporary Password *

Confirm Temporary Password *

Groups * Administrators ▼

✓ OK × CANCEL

- **Name:** The chosen username
- **Active Directory User:** Turn on the toggle to use authentication via Active Directory for the selected user.
- **Reset Password:** Turn on to reset a password.
- **Password:** Enter a new password for the selected user.
- **Confirm Password:** Reenter the password provided in the **Password** field.
- **Groups:** Add the user to one or more groups.


NOTE: A user must be added to an Active Directory group to be selected as an Active Directory user.

Select **OK** to save any changes and to return to the **Users** accordion. Select **Cancel** to cancel any changes.

Select **Delete User** from the **Actions** column to delete user information. This button is inaccessible if only one user is configured for the touch screen.

Groups

Select the **Groups** tab to view and edit settings for touch screen groups. Touch screen groups are used to group users by access level and Active Directory authentication settings.

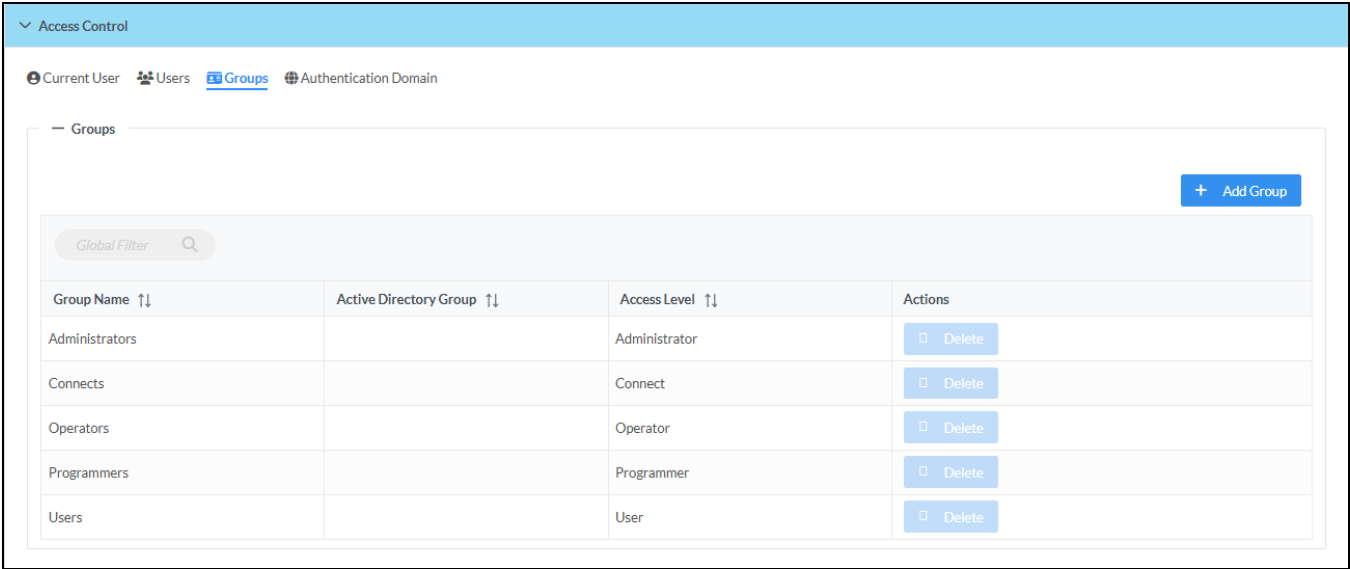

Enter text in to the **Global Filter** field to find and display groups that match the search term(s).

Touch screen groups are listed in table format. The following information is displayed for each touch screen group:

- **Group Name:** The chosen group name
- **Active Directory Group:** Reports whether the group is (**Yes**) or is not (**No**) authenticated through Active Directory

NOTE: Active Directory provides an additional layer of authentication for touch screen groups and users. Active directory group and user names are stored in the touch screen console along with a unique SID (security identifier). When an Active Directory user attempts to authenticate against the console, the console first checks the user credentials. If the Active Directory authentication is successful, Active Directory queries the console for the user or group's SID. The user is granted access to the touch screen only if at least one SID match is found.

- **Access Level:** The access level for the selected group (**Administrator, Programmer, Operator, User,** or **Connect**)

If the touch screen groups span multiple pages, use the navigation arrows on the bottom of the page to move forward or backward through the pages, or select a page number to navigate to that page. Additionally, the number of groups displayed on each page may be set to 5, 10, or 20 users.

An **Actions** column is also provided for each group that allows the user to delete groups.

Select **Add Group** at the bottom of the page to create a new touch screen group. The **Add Group** dialog box is displayed.

Use the following settings to create a new group:

- **Name:** Enter a group name.
- **Active Directory Group:** Turn on the toggle to use authentication via Active Directory for the group.
- **Access Level:** Select an access level for the group and its users from the drop-down menu.

Select **OK** to save any changes and to return to **Groups**. Select **Cancel** to cancel creating a new group.


Local Configuration

Refer to the following sections for information about configuring the device locally using its built-in setup screens.

NOTE: Some features are unavailable with the TSS-880-GV and TSS-1080-GV.

Access the Settings Screens

To access the touch screen's built-in settings screens during regular operation, press five fingers on the screen for fifteen seconds.

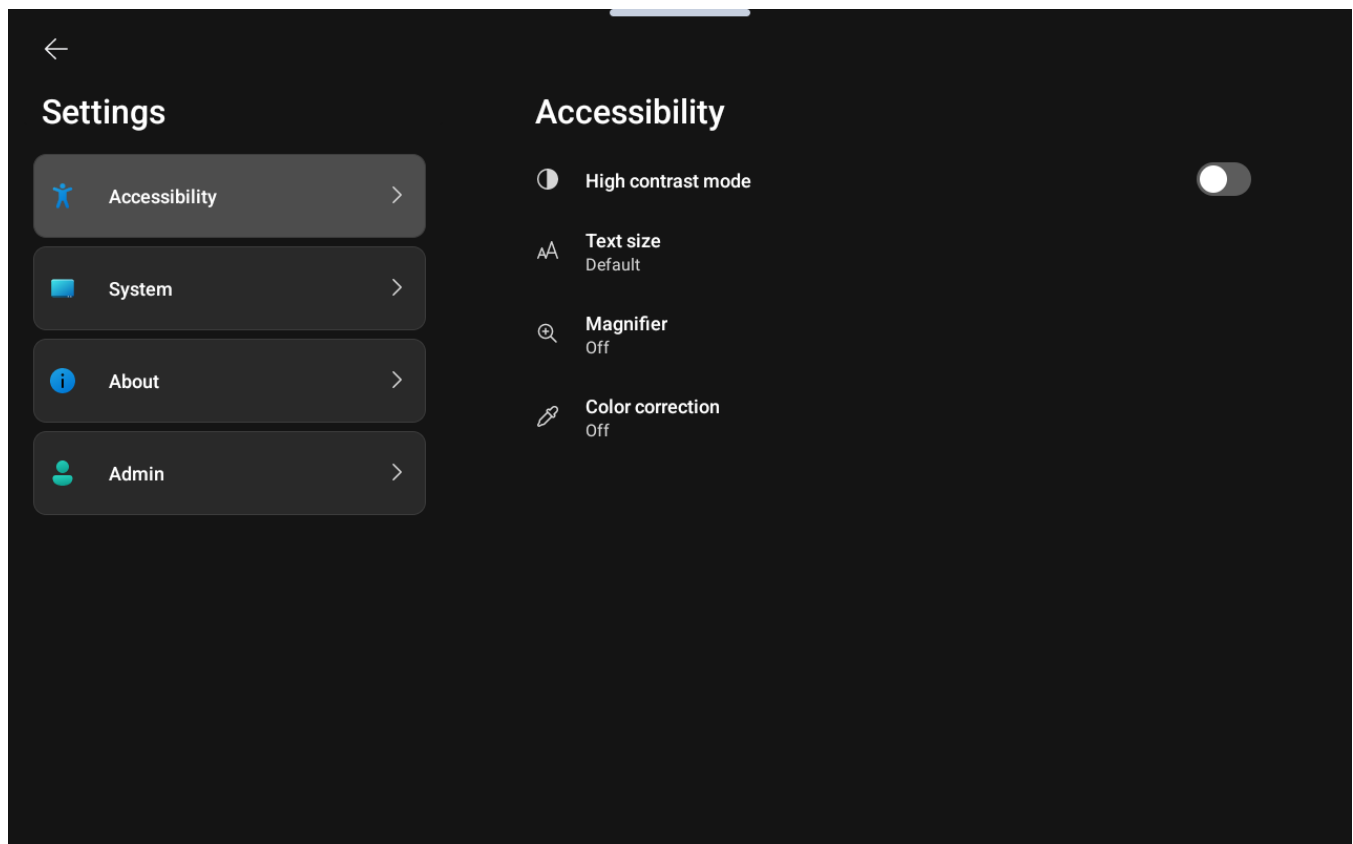


The settings screen provides several accessibility and system configuration settings as well as device information.

To access administrator level settings, select the **Admin** tab from the left menu and log into an administrator account. Some settings are not available without administrator privileges.

The functions of each tab are detailed in the following sections.

Accessibility


Select **Accessibility** on the **Settings** screen to display customizable accessibility settings. The following configuration settings are shown:

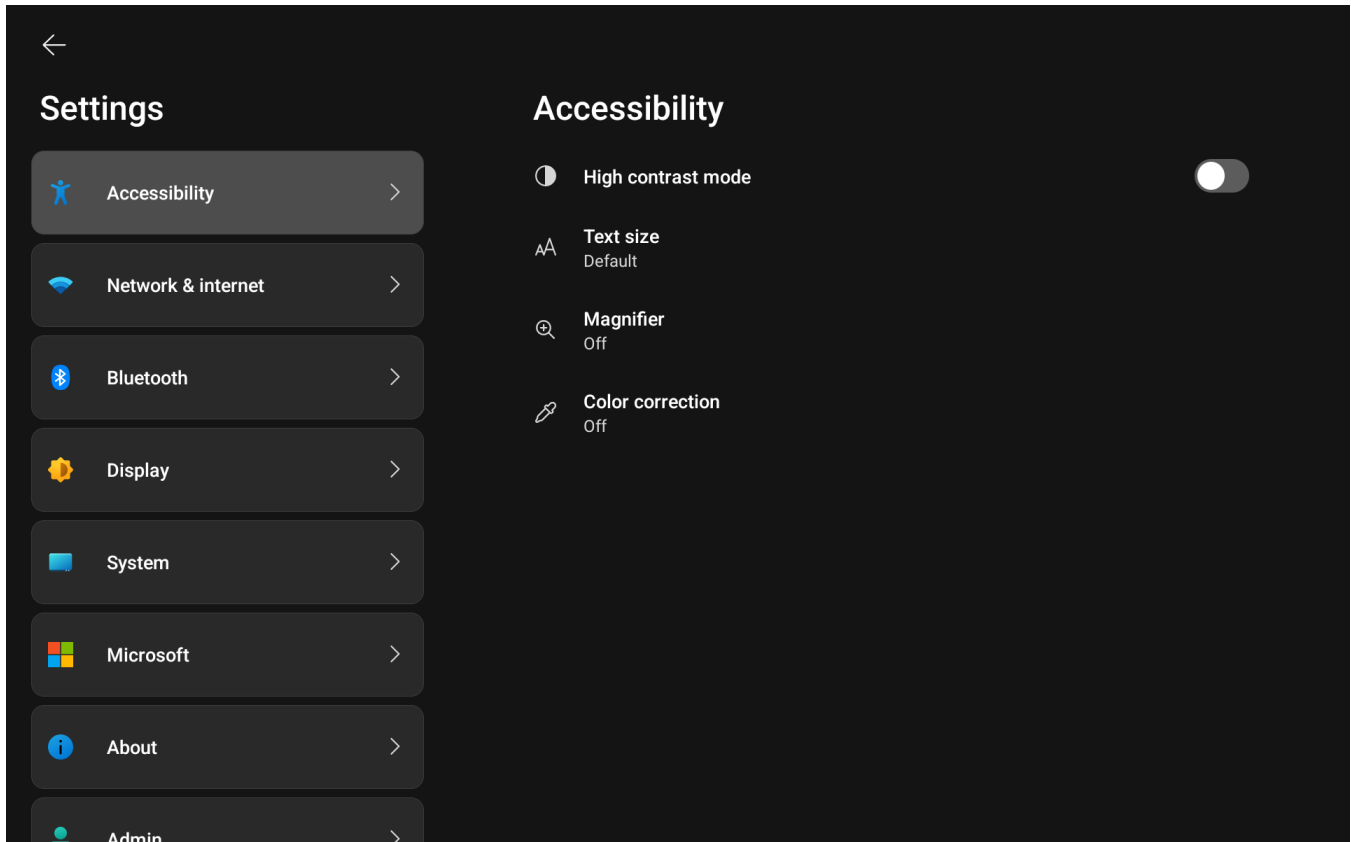

- **High Contrast Mode:** Turn on or off **High Contrast Mode** to affect the background and text colors.
- **Text size:** Select preferred text size from **Small**, **Default**, **Large**, and **Largest**.
- **Magnifier:** Turn on **Magnifier** to quickly zoom in on content. Magnifier starts and stops by triple-tapping anywhere on screen.
- **Color correction:** Turn **Color correction** on and off to compensate for blue light.


Network Settings

Select **Network** on the Settings screen to display the **Network & Internet** screen.

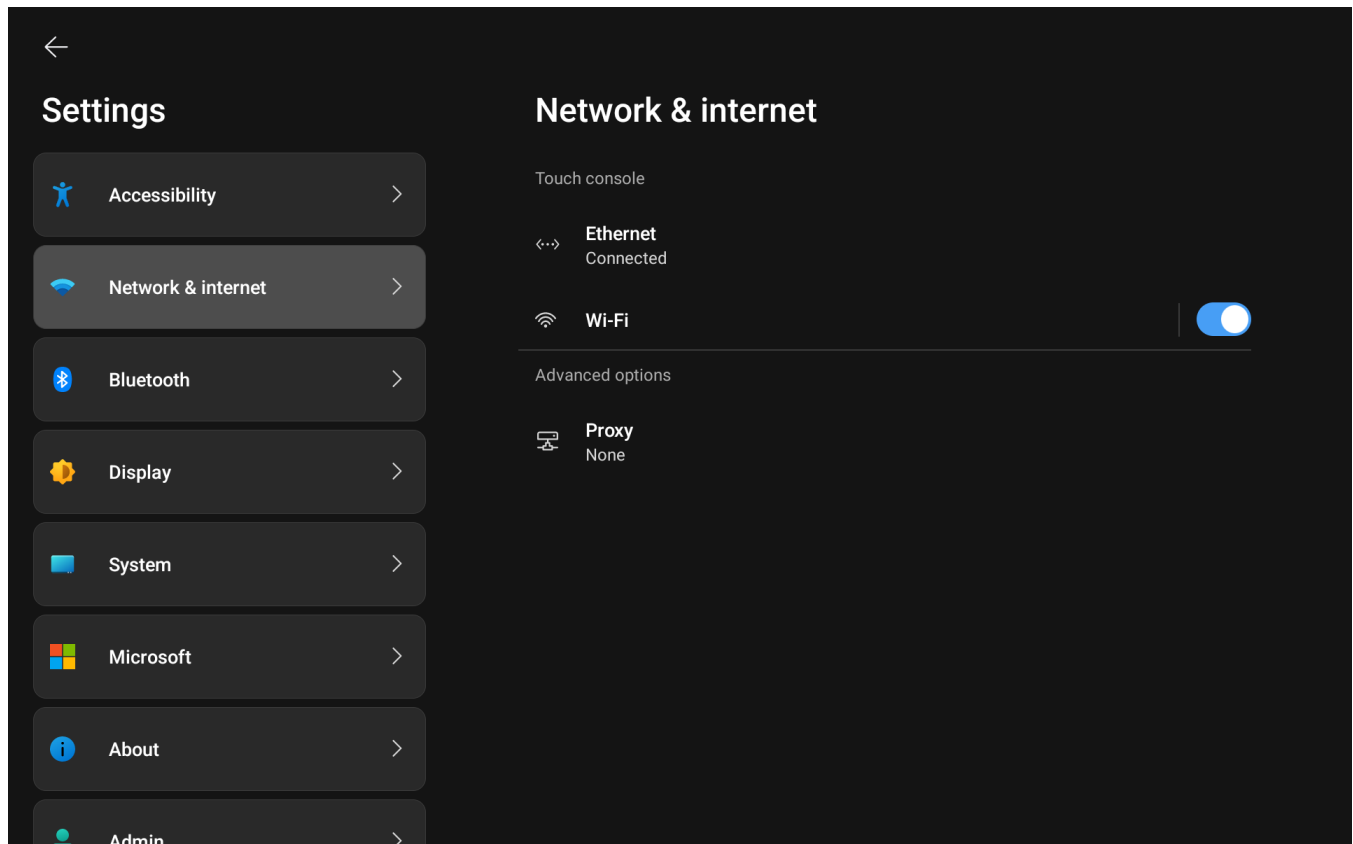

NOTE: You must be logged in as an admin to edit network settings. Navigate to the Admin screen on the Settings page to log in.

Use the **Wi-Fi** screen and select a network to view the Wi-Fi network MAC and IP addresses, subnet mask address, default router address, primary and secondary DNS addresses, host name, domain, and various details about the Wi-Fi connection.

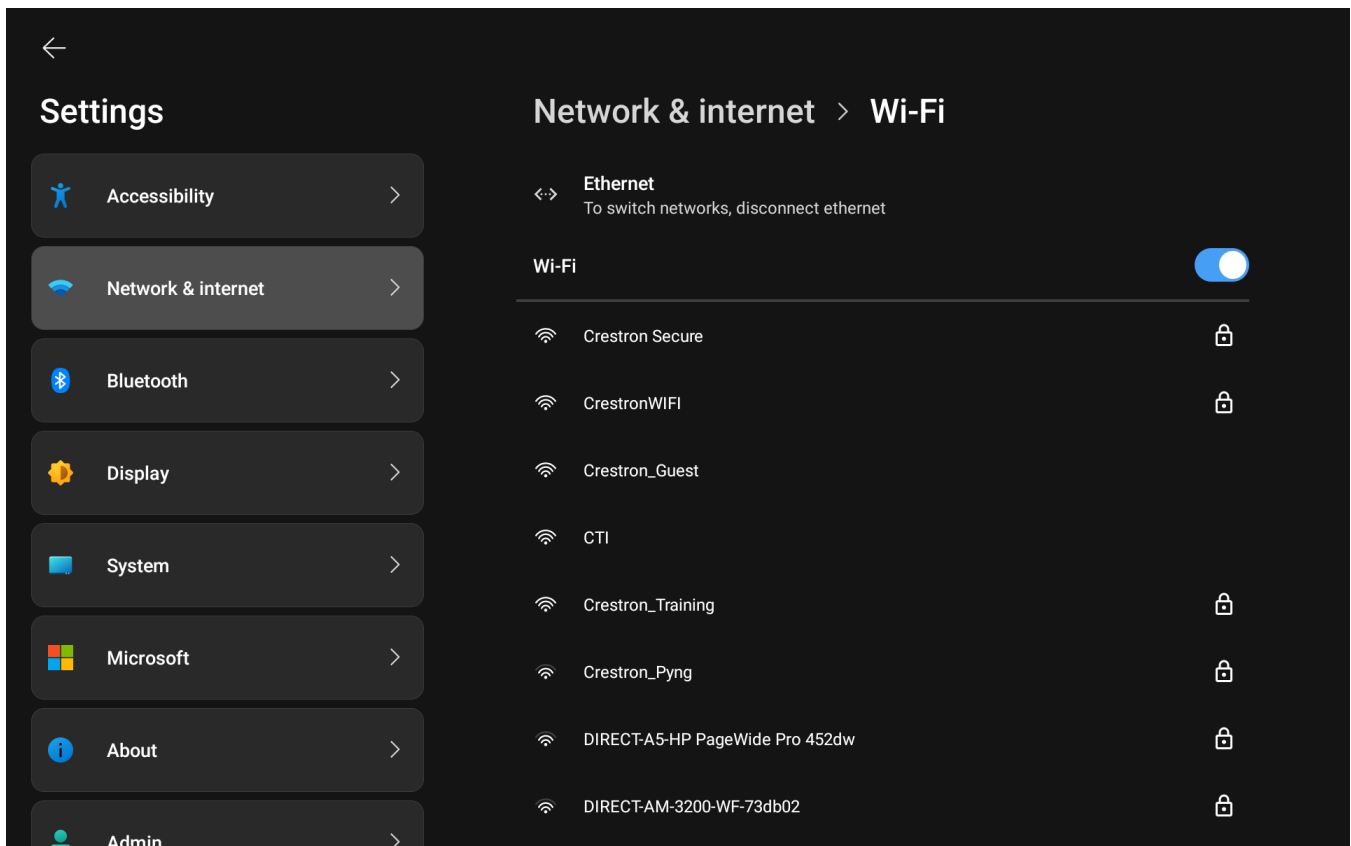


NOTES:

- Ethernet must be disabled before a Wi-Fi connection can be configured.
- Wi-Fi is disabled on -GV models.


The following buttons are provided for configuring Wi-Fi settings:

- Select **On** or **Off** under **Wi-Fi** to turn the Wi-Fi adapter on or off. If **Wi-Fi** is set to **Off**, Wi-Fi will not function and an Ethernet connection can be established.

- Select **Add Network** at the bottom of the screen to manually add Wi-Fi information.

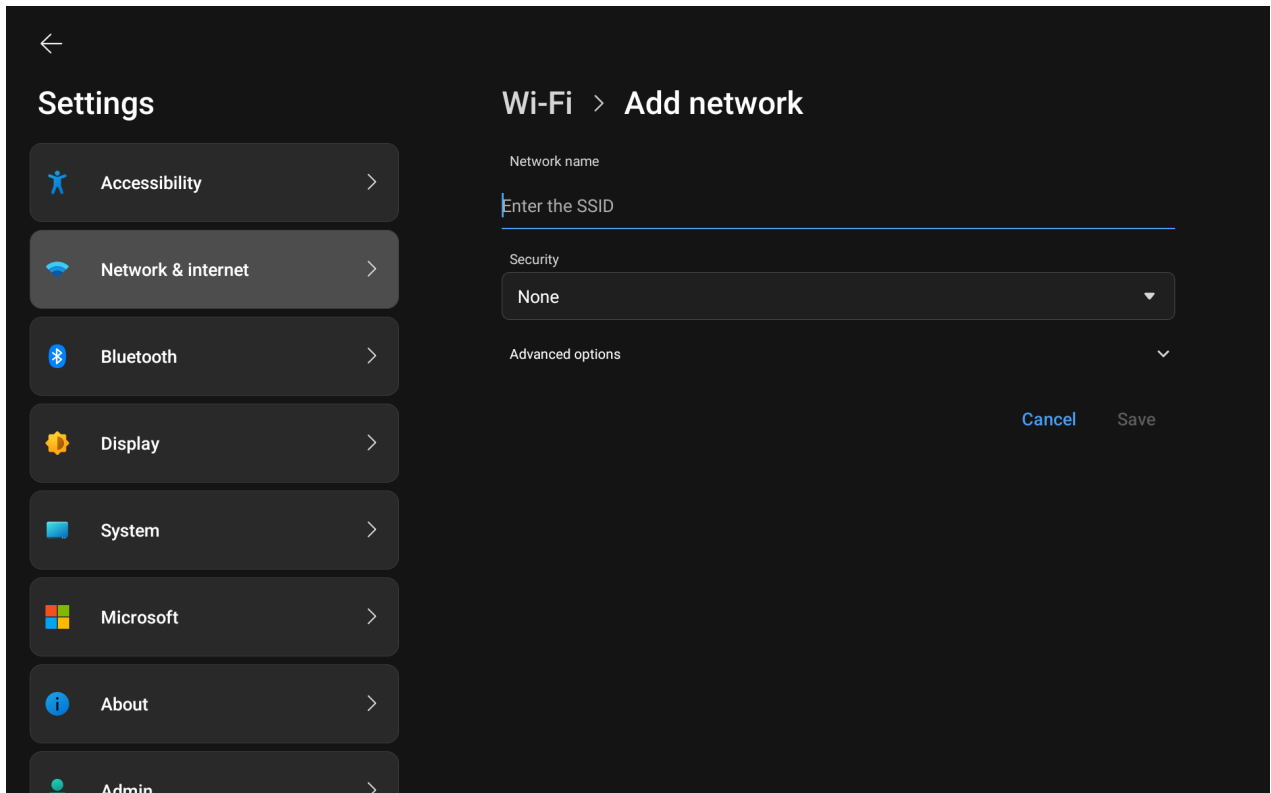

- Use the drop down menu to select DHCP (Dynamic Host Configuration Protocol) or Static IP.

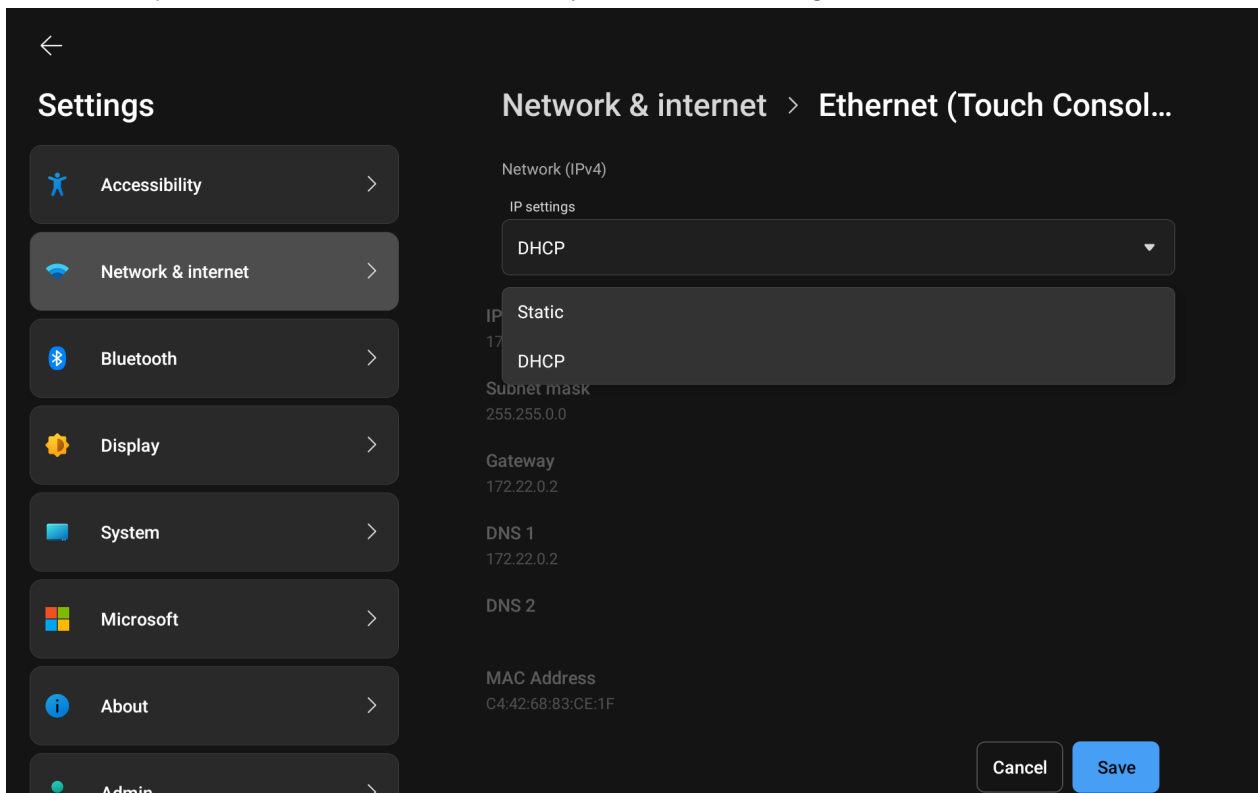

NOTE: DHCP is enabled on the touch screen by default.


- Select **Save** to apply any new Wi-Fi settings to the touch screen and to stay in setup mode.

Select the **BACK** arrow to return to the Settings screen.

Bluetooth

Select **Bluetooth** on the Settings screen to display the **Bluetooth** screen.


NOTE: Bluetooth is unavailable on -GV models.

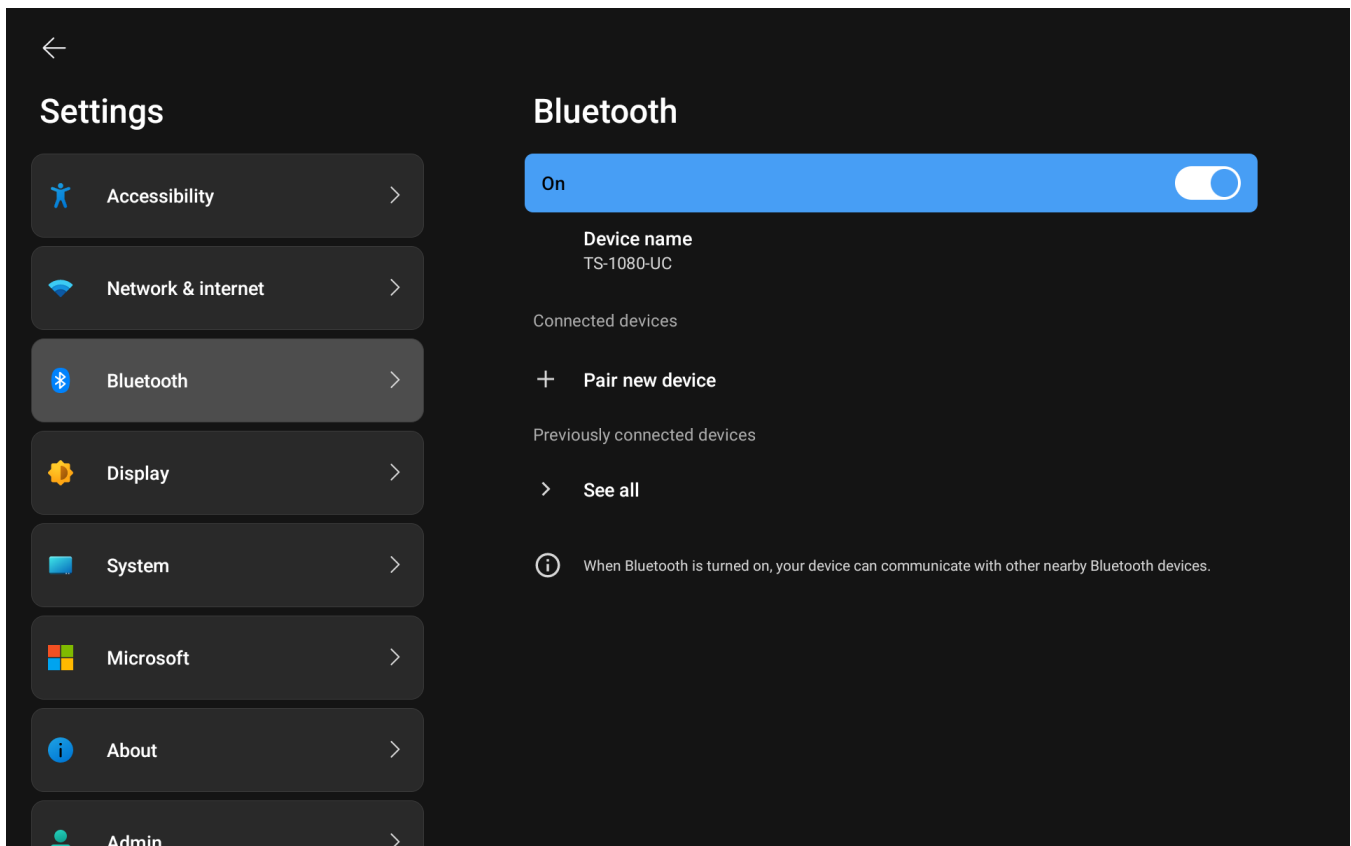


The following buttons or controls are provided for configuring Bluetooth settings:

- Turn **Bluetooth** on or off to enable or disable the Bluetooth function.

- Select **Pair new device** to connect a new Bluetooth device.
 - Select the desired device from the list of **Available Devices**. Your device must be in pairing mode to connect over Bluetooth.

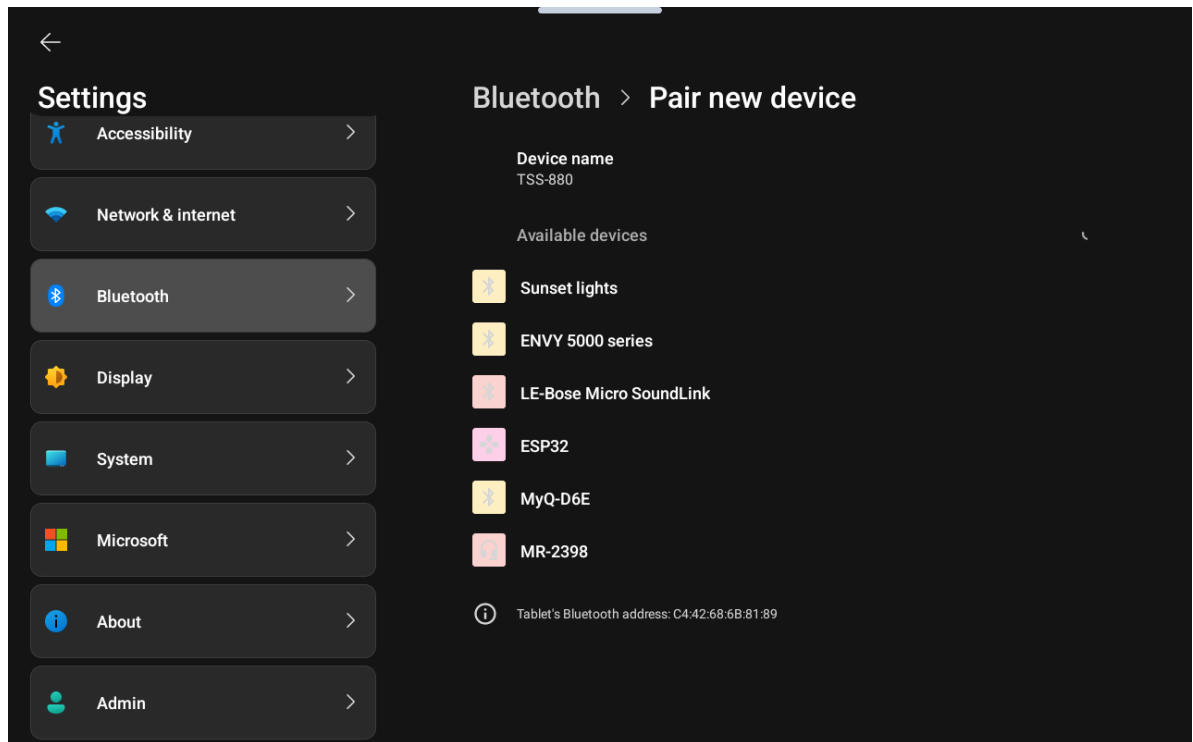


- The following pop-up window will display. Select **Pair**.

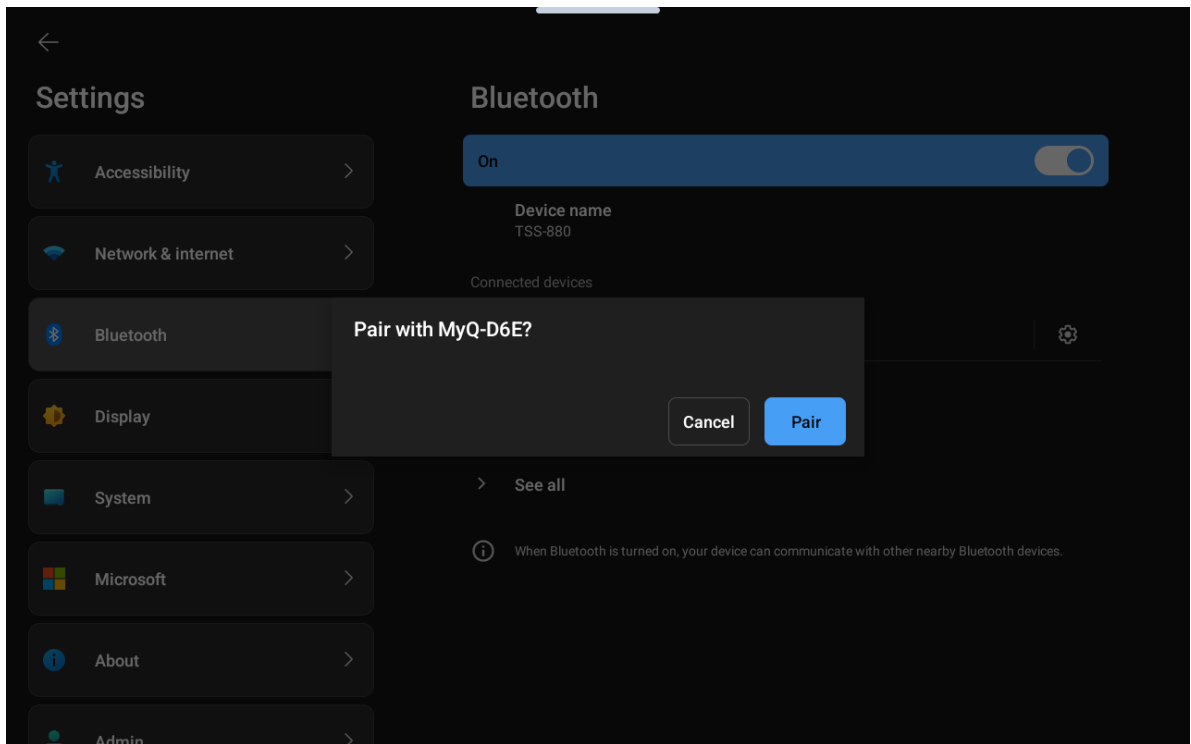


- Select the menu under **Previously connected devices** to display previous connections.

Display

Select **Display** on the Settings screen to access the **Display** screen.

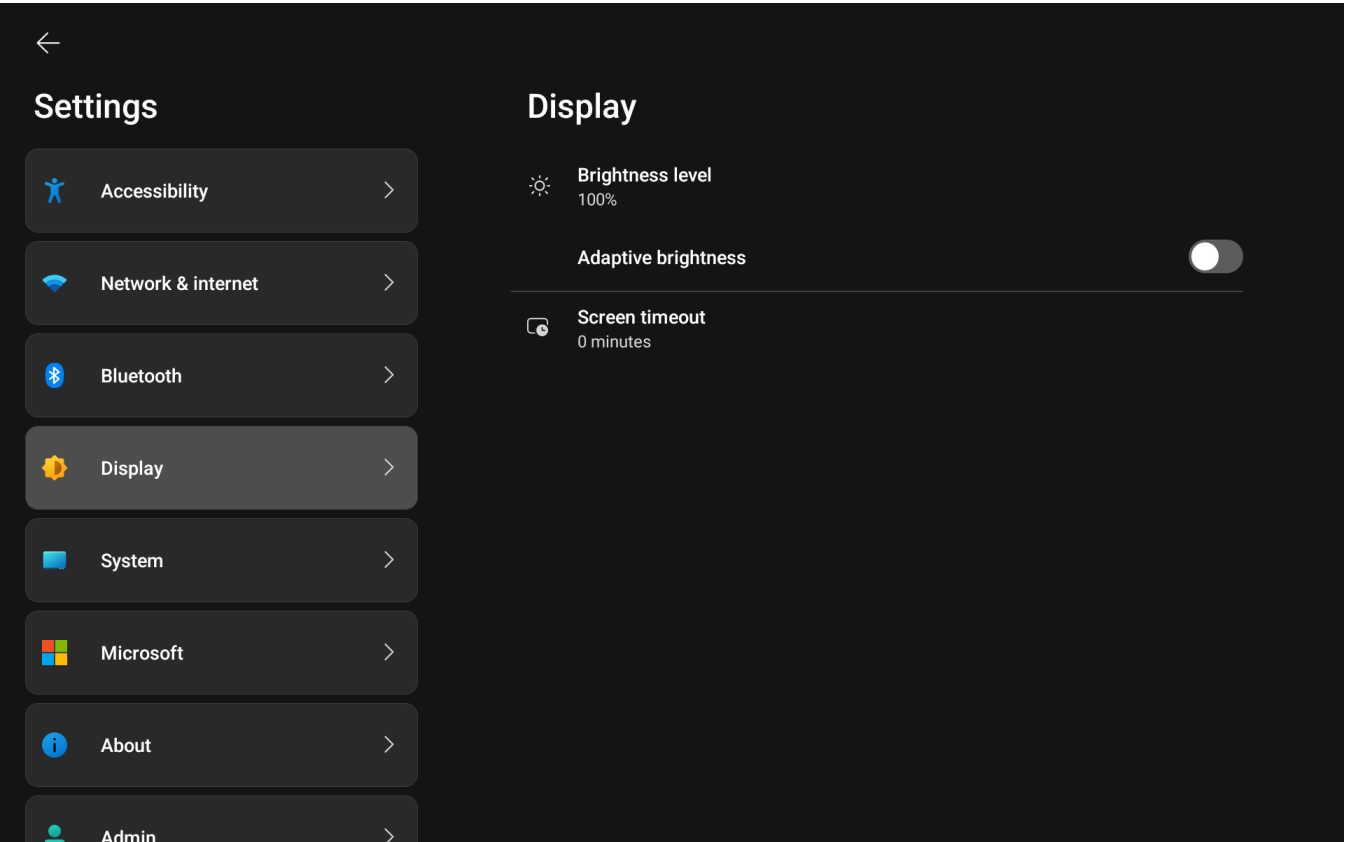


- Use the slider under **Brightness** to raise or lower the LCD display brightness level incrementally from 0 to 100%.

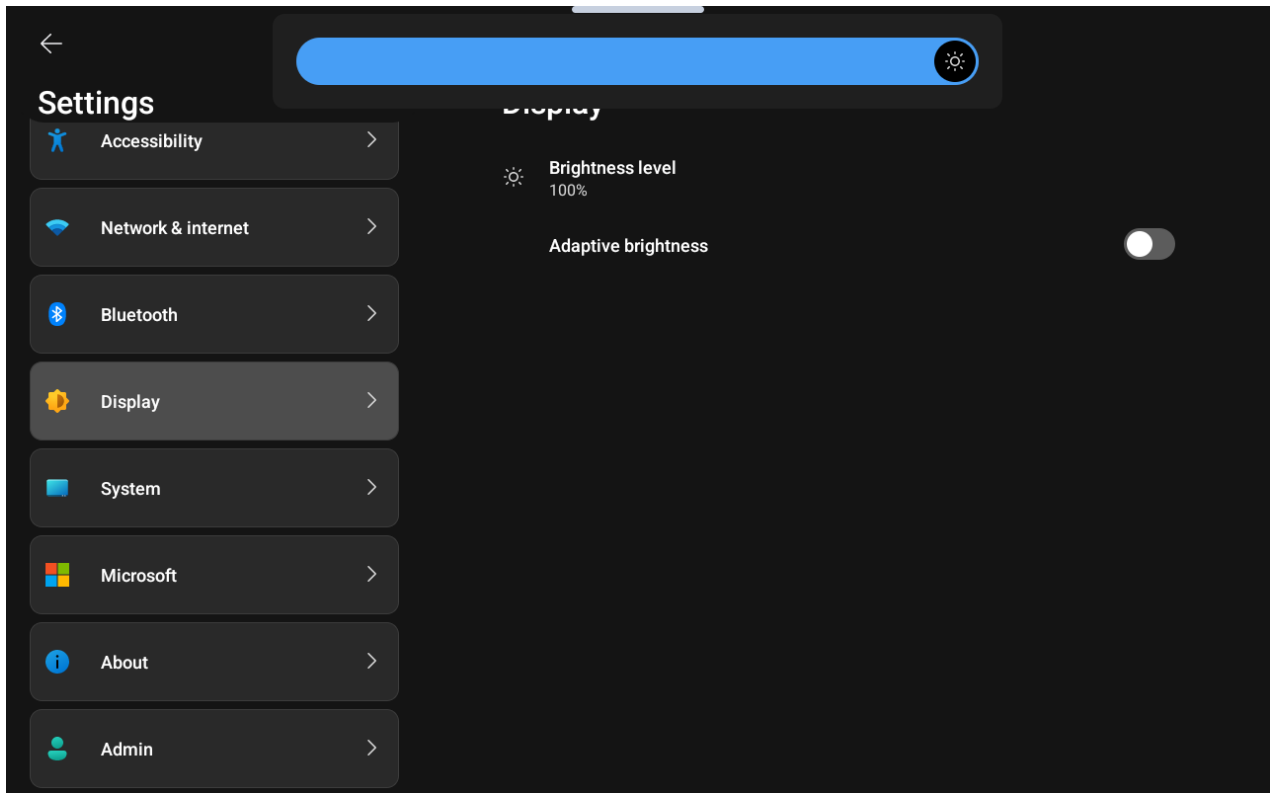

- Toggle **On** under **Adaptive Brightness** to allow the touch screen to adjust brightness levels, depending on the on-screen display, to provide ideal contrast levels.

System

Select **System** on the Settings screen to access the **System** screen.

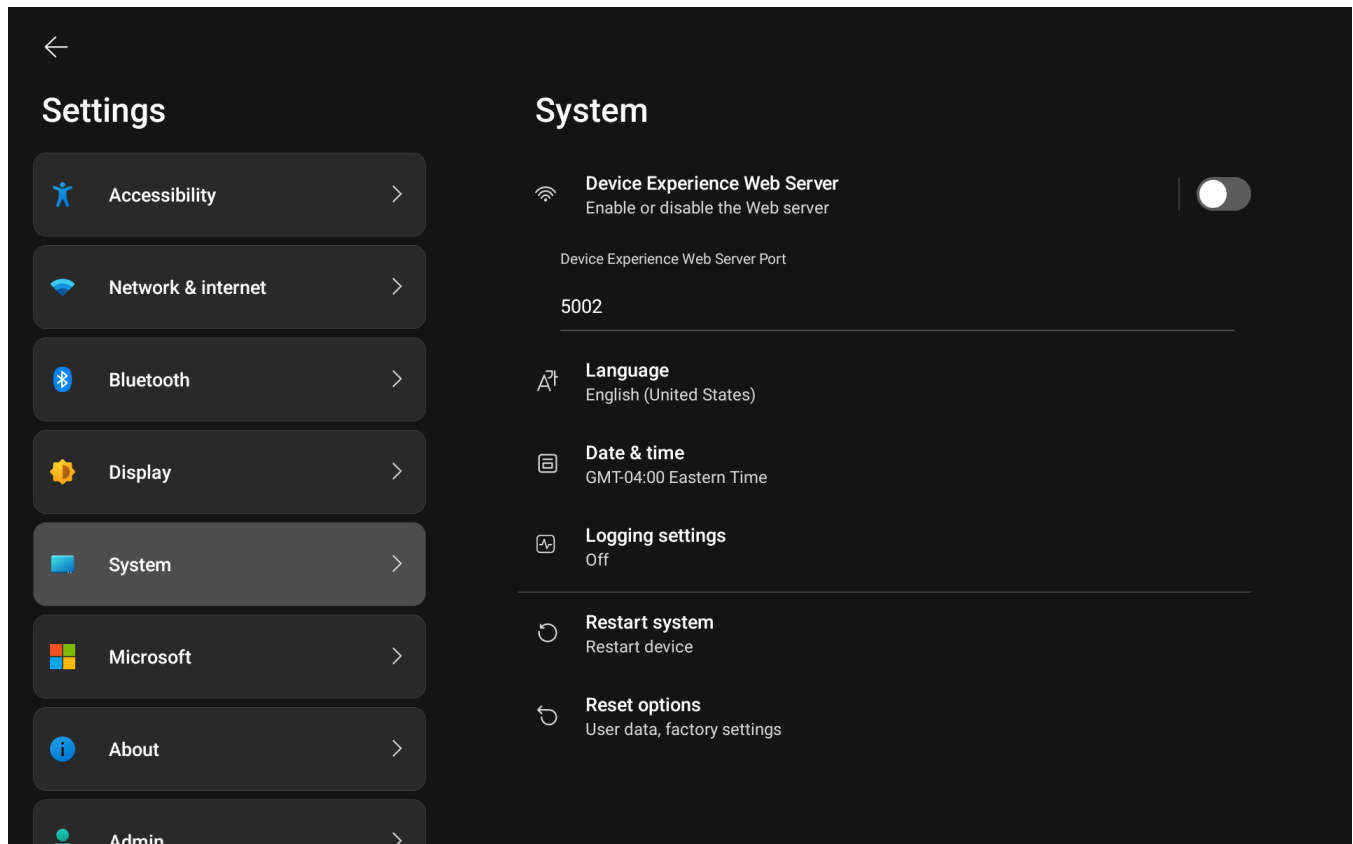


The following buttons or controls are provided for configuring System settings:

- Toggle on or off under **Device Experience Web Server** to enable or disable the web server. The port number is displayed.
- Select **Language** to change the device language. Use the pop-up menu to select the desired language.
- Select **Date & Time** to edit the date and time zone.
- Turn **Logging settings** on or off to begin logging data.
- Select **Restart system** to restart the device.
- Select **Reset options** to choose factory reset or user data reset.

CAUTION: Performing a factory restore returns all settings to their default values and removes any static IP addresses, IP table connections, and wireless access points (WAPs) that were previously added.

Microsoft


Select **Microsoft** to access the **Microsoft Privacy** screen.

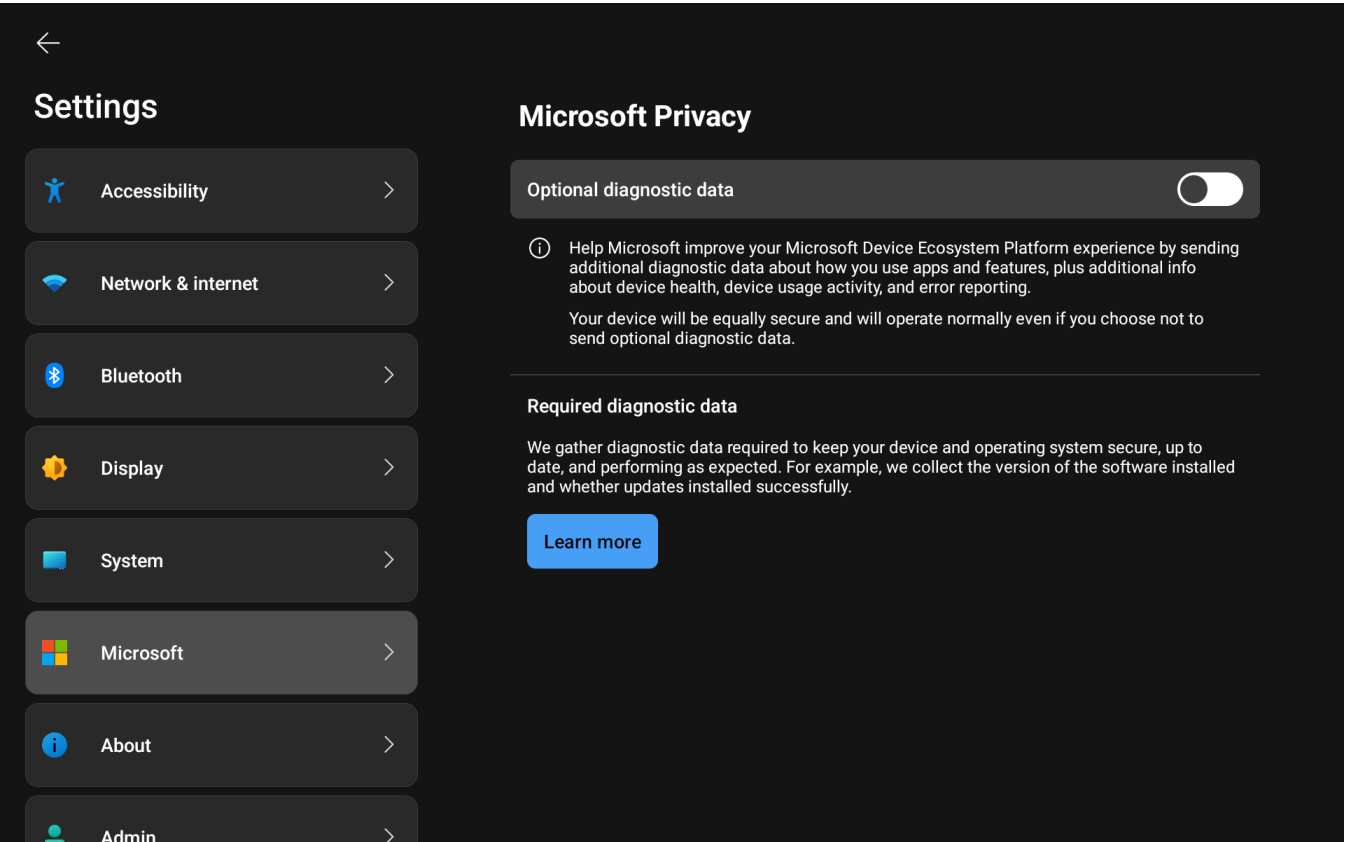

Turn **Optional diagnostic data** on or off to enable sending Microsoft information on use, device health, usage activity, and errors.

About


Select **About** to see device details on the **About** screen.

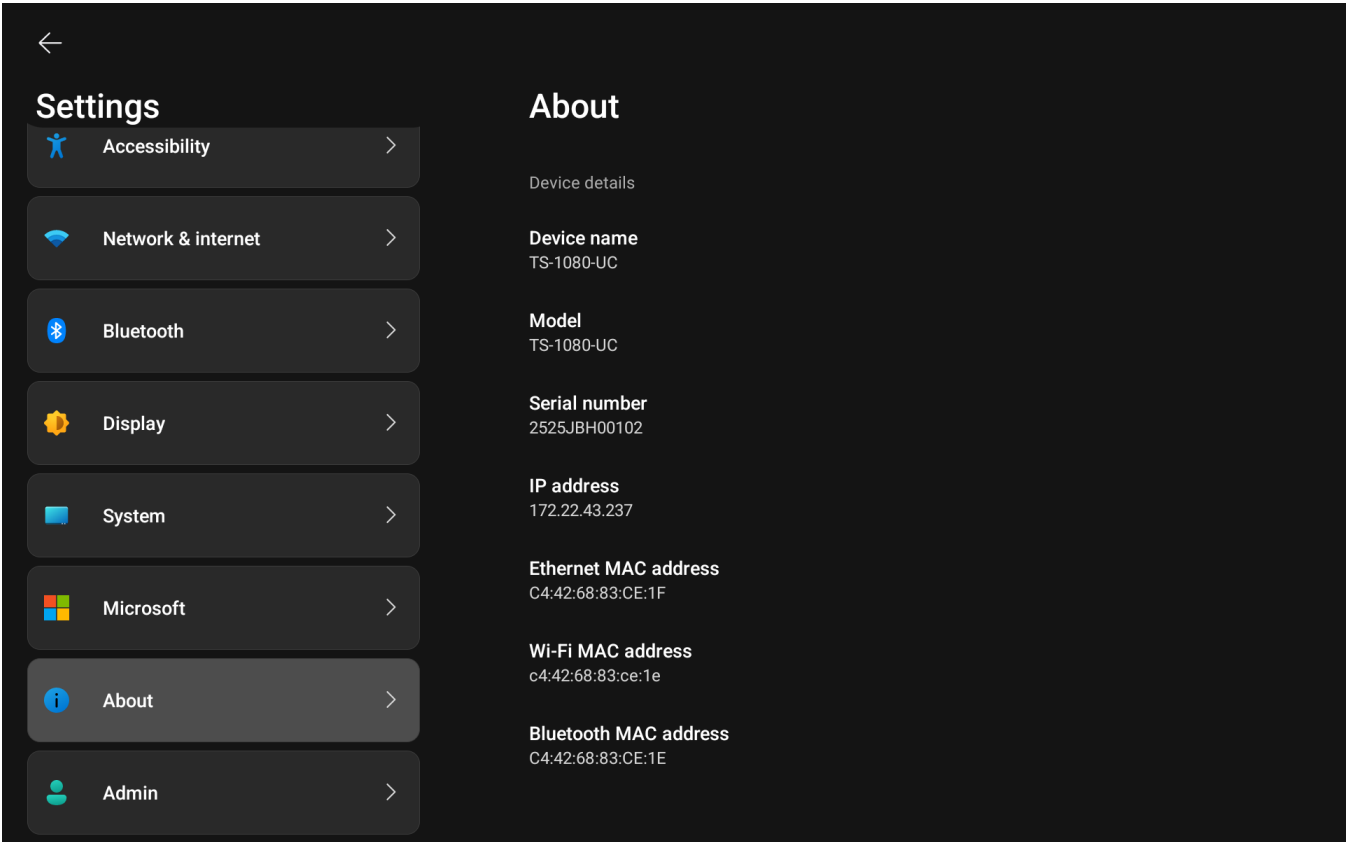

Device name, model, serial number, IP address, Ethernet MAC address, Wi-Fi MAC address, and Bluetooth MAC address information are displayed.

Admin

The **Admin** screen requires administrator log in. Select **Admin** to access the screen.

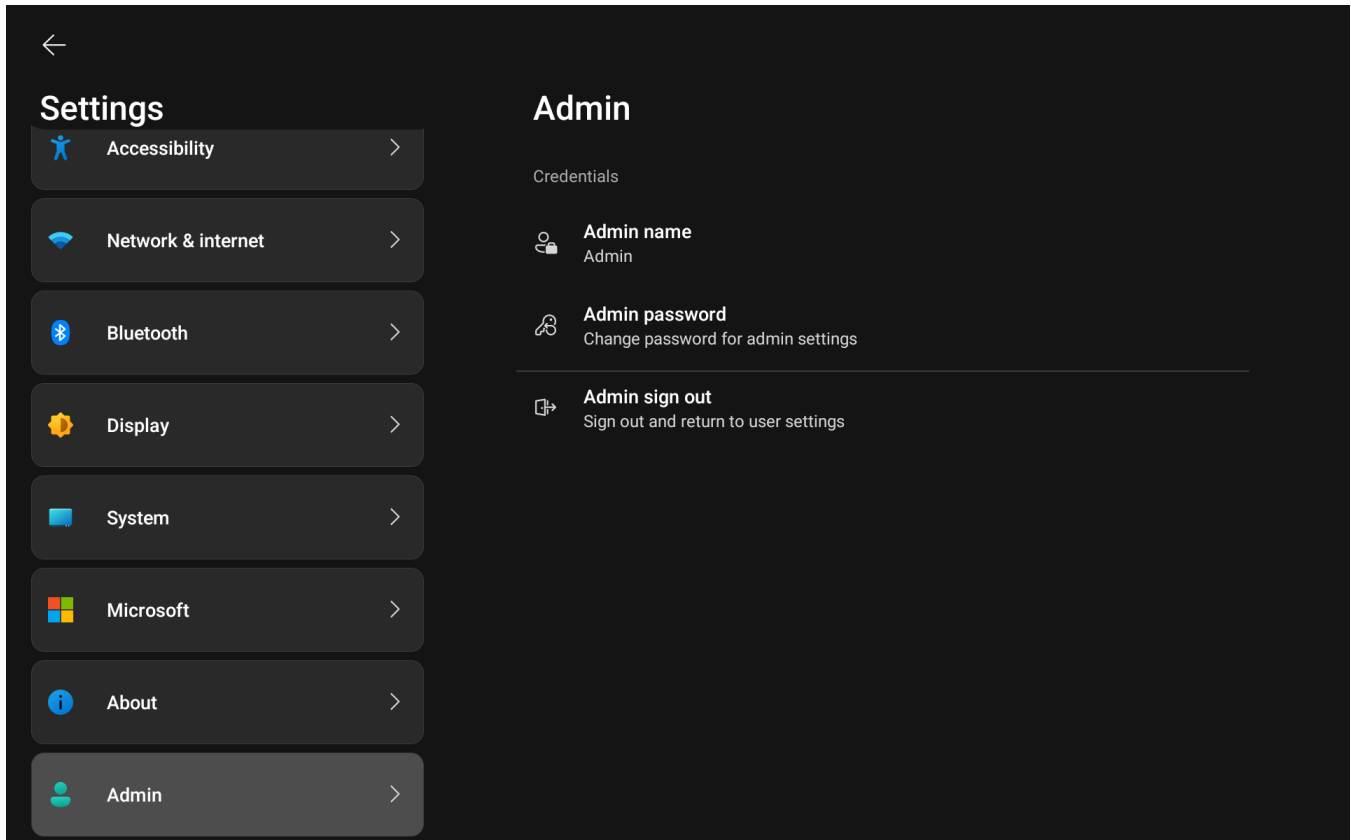

- Select **Admin name** to display the admin username.
- Select **Admin password** to change the user profile password.
- Select **Admin sign out** to sign out of the administrator account.

Application Selection

The TSS-880 and TSS-1080 touch screens ship with a variety of preconfigured applications:

- [Crestron room scheduling](#) application
- [Microsoft Teams® Scheduling Panels](#) application

External applications can be downloaded from the cloud and will install on the touch screen automatically. The following applications are supported:

- Crestron general web application
- [Crestron Home™ OS](#) user control application
- [22Miles ADSign](#) application
- [Appspace](#) application
- [Envoy® room scheduling](#) application
- [Eptura](#) application
- [Spaceti](#) application
- [Hyundai Autoever](#) application

NOTE: Support for additional applications will be provided by future firmware updates.

The touch screen runs only one app, which is selected at setup. Only the apps approved and delivered by Crestron may run on the touch screen.

NOTE: Additional subscriptions and/or licenses may be required. Refer to each provider's website for details about the capabilities and requirements of its scheduling application and services.

For more information on using and setting up each application, refer to the provider's website.

Operation

The touch screen is controlled by using its capacitive touch screen display. The touch screen supports gesturing and swiping controls to perform various functions. Supported touch controls vary by application or program.

The virtual toolbar is used to perform basic device functions if it has been enabled. By default, the virtual toolbar can be accessed by swiping down on the tab located at the top of the screen. The toolbar can be hidden by swiping up on the tab or is hidden automatically after a set timeout duration.

The following virtual buttons are provided by default and can be used to control the touch screen or the loaded application or program (if supported).



NOTE: Virtual button functionality can be custom programmed using a Crestron control system.

- **Power:** Powers the touch screen off.
- **Home:** Returns to the home page of the application or program.
- **Lighting:** Navigates to lighting controls in the application or program.
- **Up:** Moves up a page in the application or program.
- **Down:** Moves down a page in the application or program.
- **Microphone:** Enables or disables the microphone functionality.

Resources

The following resources are provided for the TSS-880 and TSS-1080.

NOTE: You may need to provide your Crestron.com web account credentials when prompted to access some of the following resources.

Crestron Support and Training

- [Crestron True Blue Support](#)
- [Crestron Resource Library](#)
- [Crestron Online Help \(OLH\)](#)
- [Crestron Technical Institute \(CTI\) Portal](#)

Programmer and Developer Resources

- help.crestron.com: Provides help files for Crestron programming tools such as SIMPL, SIMPL#, and Crestron Toolbox™ software
- developer.crestron.com: Provides developer documentation for Crestron APIs, SDKs, and other development tools

Product Certificates

To search for product certificates, refer to the [Product Certificates](#) section of the Crestron Resource Library.

Related Documentation

- [Crestron Technical Documentation](#)

