


GLA-EPC-D-F-ATS

Emergency Power Controller, Dimmer, 120-277VAC

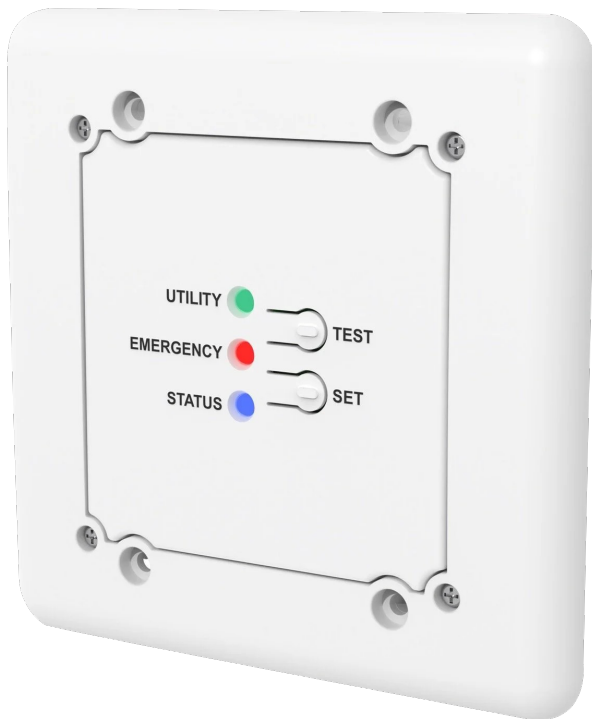

- LEDs indicate utility and emergency power
- Front-mounted manual switches
- Protects against power surges
- Includes automatic testing and fire alarm interface options
- Eliminates arcing and potential phase-to-phase shorts
- 50A rated relay contacts
- Compatible with inverter and generator systems, normally-on and normally-off types
- Slim enclosure for flush, surface, panel, and box mounting.

The [GLA-EPC-D-F-ATS](#) is a UL® 1008 listed, single zone, silent emergency transfer control with universal dimming capability. The GLA-EPC-D-F-ATS is used with 2 and 3-wire line voltage dimming systems, 0-10V, and DALI lighting control devices to manage the light fixtures for normal operation and those designated for emergency operation. During power interruption, the GLA-EPC-D-F-ATS automatically transfers emergency fixtures from the dimming control to the emergency power source. The fixtures go to full brightness, regardless of whether the dimming system is in operation or turned off. The GLA-EPC-D-F-ATS is suitable for use in indoor public spaces such as auditoriums, restaurants, conference rooms, theaters, and classrooms.

Specifications

Power

Sensing Input	120-277V
Load Rating	120-277V (16A)
Ballast Load Rating	16A magnetic, 16A electronic
Incandescent Load	1920 W (120V), 4432 W (277V)

Environmental

Temperature	32° to 140°F (0° to 60°C)
--------------------	---------------------------

Construction

Rating	UL 94V-0
---------------	----------

Mounting

Material	4-11/16 in. back-up box, plaster ring not required
Flush Mount Size	H: 6.00 in. (152 mm) x W: 6.00 in. (152 mm) x D: 0.5 in. (13 mm)

Dimensions

Height	4.00 in. (102 mm)
Width	4.00 in. (102 mm)
Depth	2.30 in. (59 mm)

Weight

18 oz (510 g)

Model

GLA-EPC-D-F-ATS

Emergency Power Controller, Dimmer, 120-277VAC

GLA-EPC-D-F-ATS

Emergency Power Controller, Dimmer, 120-277VAC

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or contact us for additional information by visiting www.crestron.com/contact/our-locations for your local contact.

The original language version of this document is U.S. English.
All other languages are a translation of the original document.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed online at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. UL is either a trademark or registered trademark of Underwriters Laboratories, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.

©2026 Crestron Electronics, Inc.

Rev 04/22/26