

UC-C160-Z

Crestron Flex UC Video Conference System Integrator Solution for Zoom Rooms™ Software

The Crestron® Flex UC Video Conference System Integrator Solution for Zoom Rooms™ software (UC-C160-Z) delivers a powerful, professional solution for knowledge workers who want the Zoom Rooms software experience in small to midsize meeting and conference rooms. The UC-C160-Z allows the installer to select audio and camera hardware dictated by the room.

Minimum Requirements

- A video display, connected to the UC-ENGINE-Z
- A Zoom Rooms account or activation code
- USB camera
- AEC-enabled USB speakerphone or DSP device


NOTE: (An integrated device containing a camera, speakerphone, or DSP can also be used) (not included)

Optional Items


- A secondary display

Check the Boxes


Bracket Assembly Box

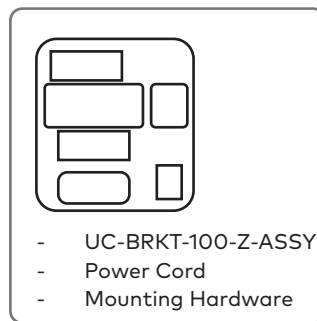

Accessory Box

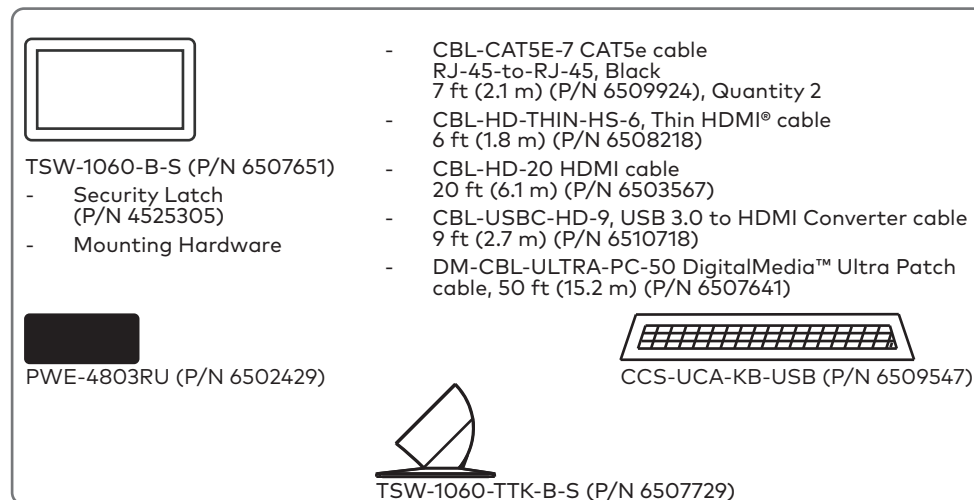


System Overview

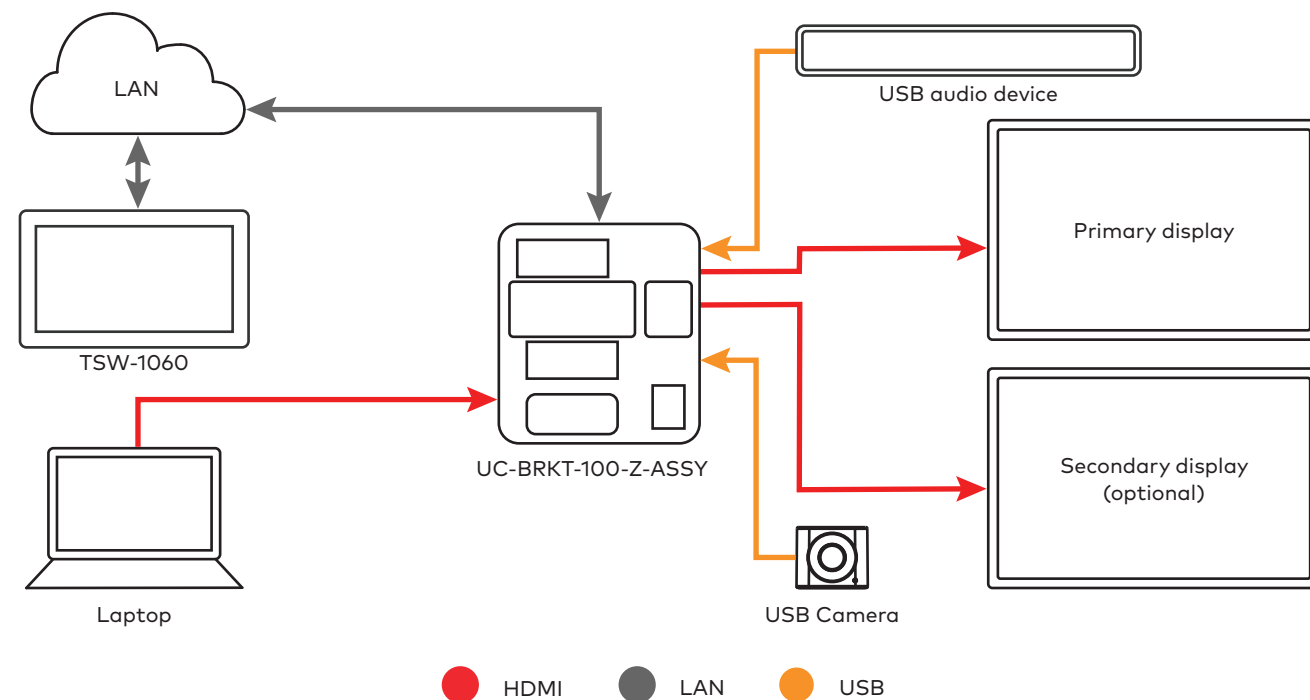


Connect the System

1. Remove connector covers to make connections.

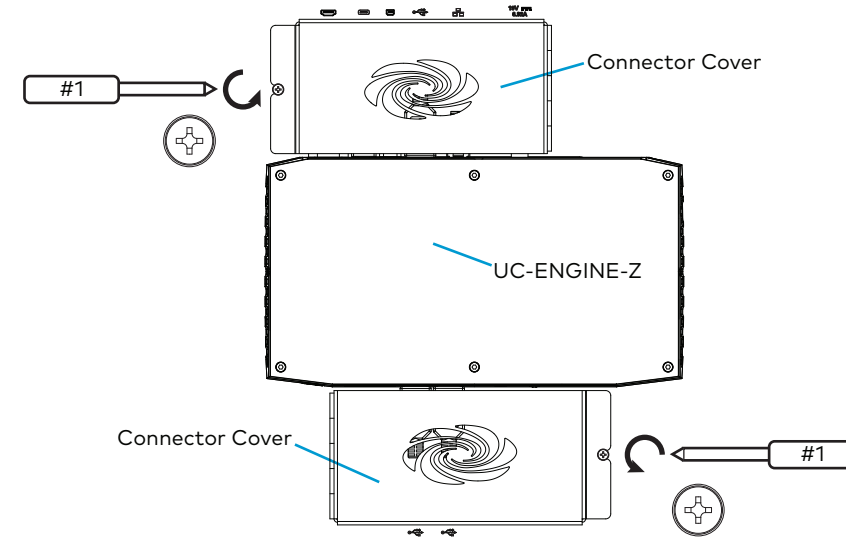


2. Make connections to the TSW-1060 and UC-BRKT-100-Z-ASSY as shown below.


CAUTION: The bracket assembly has cables and devices that are connected at the factory. **DO NOT DISCONNECT ANY DEVICES OR CABLES THAT ARE ALREADY CONNECTED.**

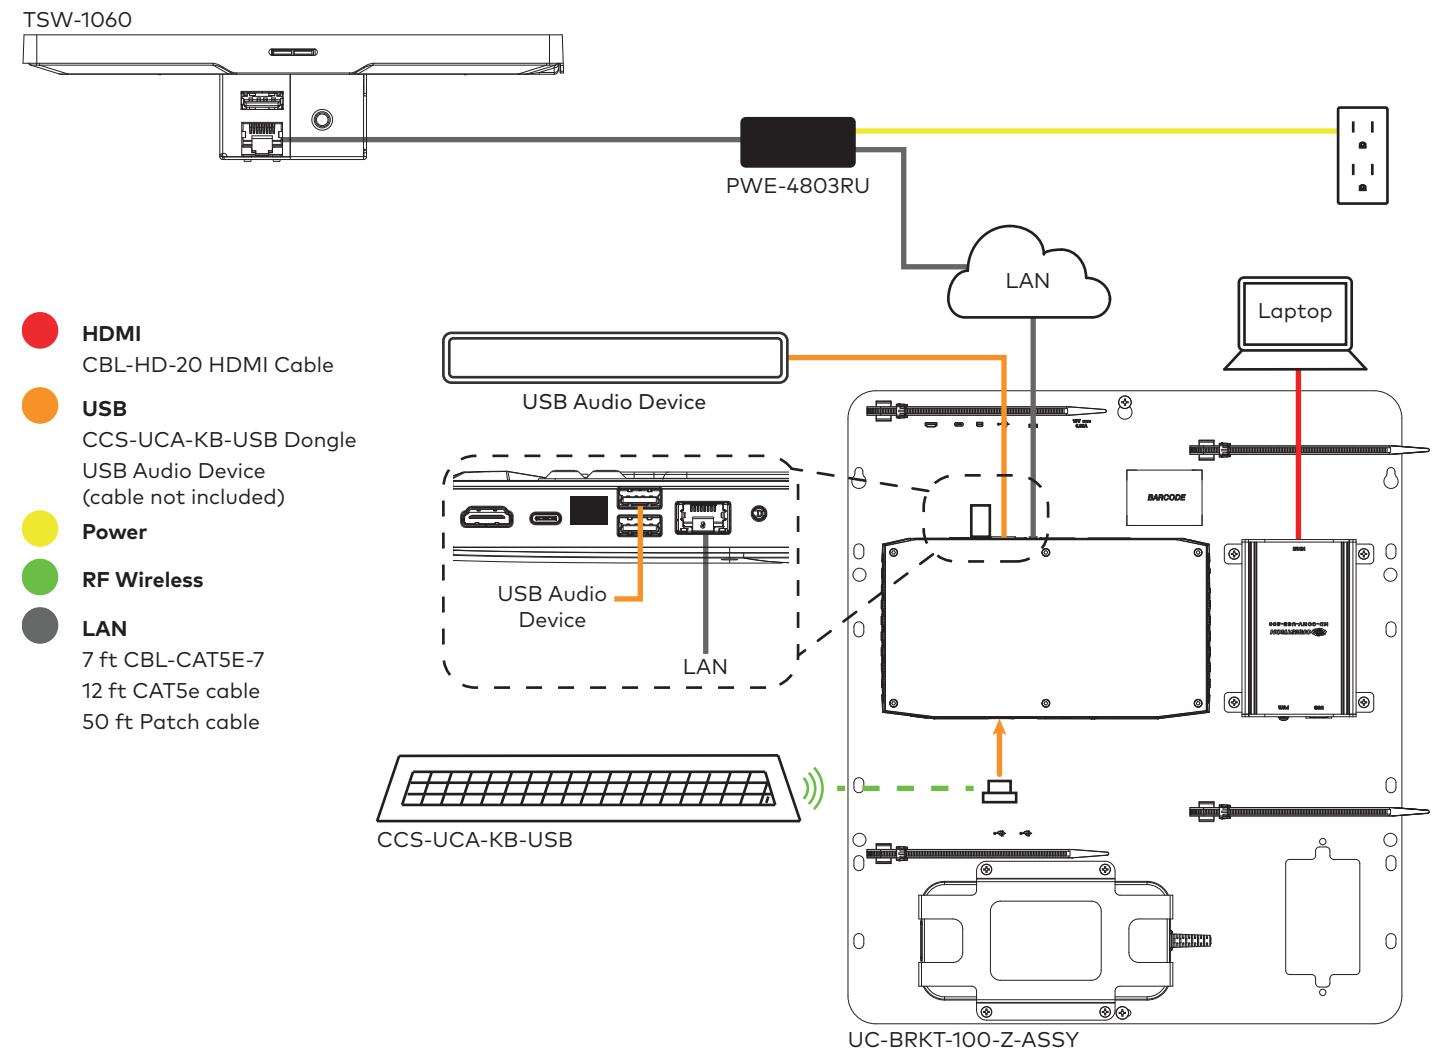

3. Connect the camera and display devices to components on the UC-BRKT-100-Z-ASSY as shown below.

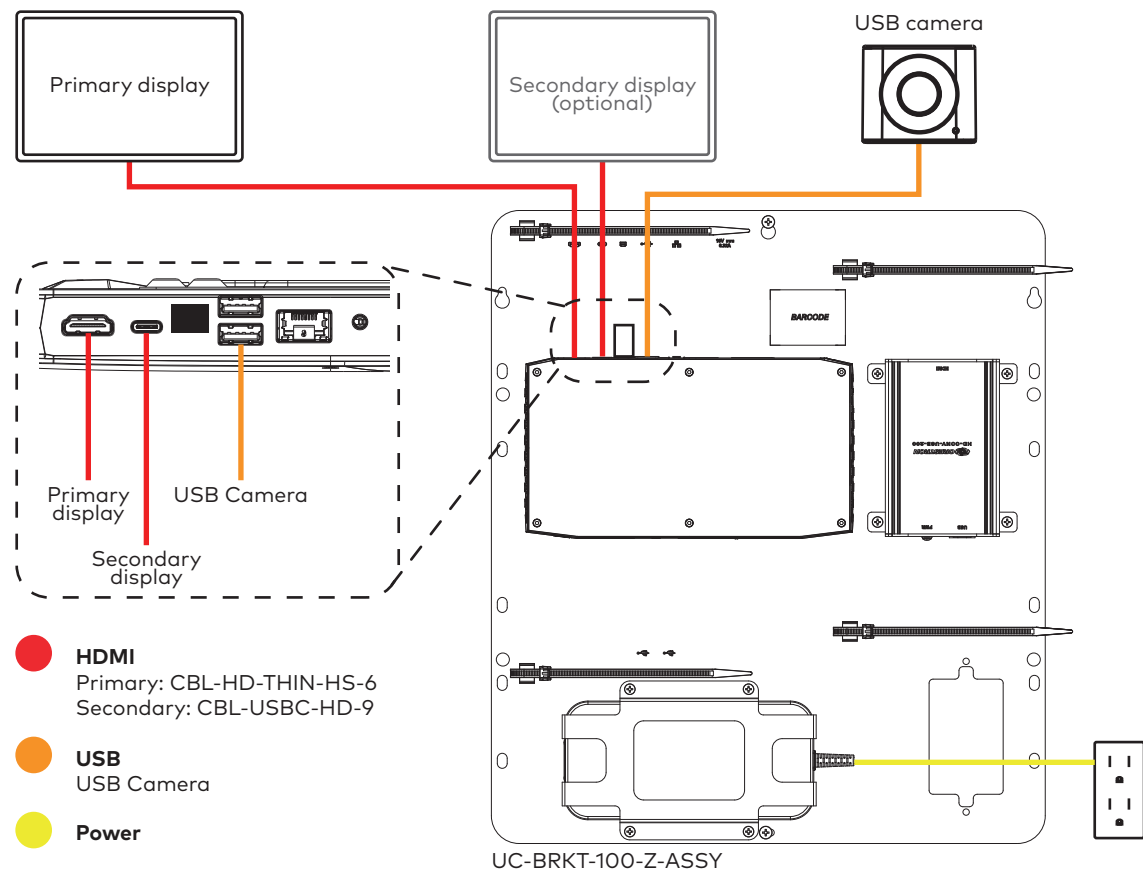


4. Bundle the cables with the integrated cable tie wraps. The cable tie wraps are reusable.

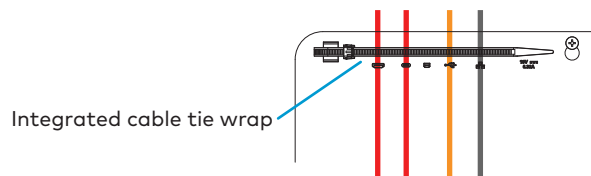

Complete the Installation

1. Secure the connector covers to protect the connections.

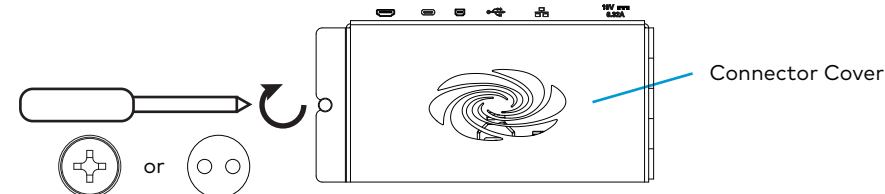

2. Press the power button on the bottom of the UC-ENGINE-Z and apply power to all of the other devices in the system. The connected display device will show a pairing code, and the TSW-1060 will show its IP address.

Configure the System

Use the TSW-1060 to sign in to the Zoom Rooms service using a Zoom Room Sign-In or an activation code.

1. Tap **Touch Here to Enable a Specific Application** on the bottom of the screen. A list of applications is displayed.
2. Tap **Zoom Rooms**, and then tap **Confirm**. The touch screen will reboot.

NOTE: Additional settings are available for switching between the Zoom Rooms application and a custom user project. For details, refer to the TSW-560/TSW-760/TSW-1060 Supplemental Guide (Doc. 7927) at www.crestron.com/manuals.

3. Enter the pairing code shown on the display to pair the TSW-1060 with the UC-ENGINE-Z. The Zoom Rooms Controller app is displayed.
4. Log in to the Zoom Rooms service with an activation code or Zoom Rooms Credentials (email and password).

- **Activation Code:**
 - i. Tap **Enter Activation Code**.
 - ii. Enter the 16-digit activation code provided by the administrator to activate the Zoom Room that is assigned to the activation code. The Zoom Rooms Conference Room screen is shown on the display.
- **Sign In:**
 - i. Tap **Sign In**
 - ii. Enter the Zoom Room credentials and tap **Sign In**.
 - iii. Select the conference room name from the list, and tap **Next**. The Zoom Rooms Conference Room screen is shown on the display.

5. Tap **Settings**. If a password is required, enter the password (default is **0000**). The **Settings** screen is displayed.

6. Tap **Microphone**, and select the USB audio device as the source.

7. Tap **Speaker**, and select the USB audio device as the source.

8. Tap **Meet Now** to exit.

Additional Information

Scan or click the QR code for detailed product information.



UC-C160-Z

HDMI

Compliance and Legal

Original Instructions: The U.S. English version of this document is the original instructions. All other languages are a translation of the original instructions.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, and DigitalMedia are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Zoom Rooms is either a trademark or registered trademark of Zoom Video Communications, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

©2019 Crestron Electronics, Inc.

Crestron Electronics, Inc.
15 Volvo Drive, Rockleigh, NJ 07647
Tel: 888.CRESTRON
Fax: 201.767.7576
www.crestron.com

Quick Start - Doc. 8469C
(2053830)
09/26/19
Specifications subject to change without notice.