

Infrared Presence Detectors with Züm® Wired Lighting Control



- *Ceiling-mount presence sensor*
- *Passive infrared (PIR) motion detection*
- *360 degree coverage pattern*
- *Fully digital circuitry for low cost and high reliability*
- *Built-in closed loop daylight sensor*
- *Control system communications the Züm® Link network*
- *Compatible with Züm wired keypad*
- *For the -RLY model, additional relays included for input-relay capable devices*

As part of providing professional lighting and control solutions for the entire enterprise, we are pleased to offer STEINEL™ products, which are available for sale through authorized Crestron® Commercial Lighting system integrators.

Based in Germany, STEINEL has been manufacturing lighting controls for over 25 years. Their product offering includes a wide variety of controls and sensors for indoor and outdoor applications.

STEINEL™ presence detectors with Züm® Link wired communication are part of a system designed to provide sophisticated lighting control with simple installation. A wired solution for Züm commercial lighting systems, the Züm Link Presence Detectors communicate via [CBL-CAT5E-ZUMLINK-P](#) cable (sold separately) which allow for in-room device daisy-chaining to other Züm Link devices (such as the [ZUMLINK-KP](#) keypad or Züm Link [load controllers](#)). The presence detectors are equipped with daylighting capabilities to adjust the lighting based on natural light. The RLY presence detectors also have a three-wire output relay to connect to a relay-input capable device, such as an HVAC call system. The presence detectors mount directly to the ceiling or via a junction box (not included).

Twelve Züm Link Presence Detectors are offered:

Presence Detector with Daylight Sensing

- [ZUMLINK-IR-QUATTRO-DLS](#) with passive infrared technology
- [ZUMLINK-DT-QUATTRO-DLS](#) with passive infrared and ultrasonic technology
- [ZUMLINK-US-QUATTRO-DLS](#) with ultrasonic technology
- [ZUMLINK-IR-QUATTRO-HD-DLS](#) with high-definition, passive infrared technology
- [ZUMLINK-US-HALLWAY-DLS](#) with ultrasonic technology and bidirectional detection for hallways
- [ZUMLINK-US-ONEWAY-DLS](#) with ultrasonic technology and unidirectional detection for hallways

Presence Detector with Daylight Sensing and Output Relay

- [ZUMLINK-IR-QUATTRO-DLS-RLY](#) with passive infrared technology
- [ZUMLINK-DT-QUATTRO-DLS-RLY](#) with passive infrared and ultrasonic technology
- [ZUMLINK-US-QUATTRO-DLS-RLY](#) with ultrasonic technology
- [ZUMLINK-IR-QUATTRO-HD-DLS-RLY](#) with high-definition, passive infrared technology
- [ZUMLINK-US-HALLWAY-DLS-RLY](#) with ultrasonic technology and bidirectional detection for hallways
- [ZUMLINK-US-ONEWAY-DLS-RLY](#) with ultrasonic technology and unidirectional detection for hallways

Züm Link Wired Technology

Züm Link technology enables in-room lighting control through keypads and sensors wired to controllers. Züm Wired devices connect via [CBL-CAT5E-ZUMLINK-P](#) CAT5e cable (sold separately) to provide daisy-chaining and lighting control of compatible loads.

Infrared Presence Detectors with Zūm[®] Wired Lighting Control

Easy Installation

For flexibility and ease-of-use, install Zūm devices (load controllers, keypads, and presence detectors) and connect them with Zūm Link ([CBL-CAT5E-ZUMLINK-P](#)) or Zūm Net ([CBL-CAT5E-ZUMNET-P](#)) CAT5e cable. Nonsystem occupancy, vacancy, or daylight sensors may also be installed in a Zūm space wired to the a load controller.

Easy Commissioning

Finish the installation by quickly commissioning the room through the [Zūm app](#). Expedite commissioning by copying a room configuration and sending it to an identical room. Save a room configuration template and share it via the [ZUM-HUB4](#) or the Zūm app. The [ZUMLINK-KP](#) Bluetooth[®] connection is required to configure a Zūm wired space with the Zūm app.

Specifications

Load Control

Control Output	1A @ 30VAC/VDC
----------------	----------------

Zūm Link Power Bus Requirements

Max Current Consumption	17 mA
-------------------------	-------

Passive Infrared (PIR) Detection

Coverage	360° square mechanically scalable detection zones
Sensors	Single infrared pyroelectric detector
Detection Zones	Presence: Major motion as described by NEMA WD7; Maximum: 30 x 30 ft (900 sq ft) Radial: Motion either directly toward or away from the sensor; Maximum: 30 x 30 ft (900 sq ft) Tangential: Motion perpendicular to the sensor; Maximum: 46 x 46 ft (2,116 sq ft)
Light Level Setting	10-1000lux / 1-100 fc

Controls & Indicators

LED	(3) Blue LEDs on the sensor head frontplate Flashes upon start up and when triggered to identify itself
-----	--

Connections

ZUMLINK	(2) RJ-45 orange ports; In-room Zūm Link device daisy-chaining; Maximum 750mA pass-through current including any internal power supply
Output Relays	(1) Green: Normally open
(Relay models only)	(1) Blue: Normally closed (1) Red: Common

Environmental

Temperature Rating	32° to 104°F (0° to 40°C)
	IP20 rated

Enclosure

Material	Plastic
----------	---------

Infrared Presence Detectors with Züm® Wired Lighting Control

Mounting Mount directly in the ceiling, 4 in. square or round junction boxes (not included), or 3 in. mud rings (not included)

Specifications are subject to change without notice.

©2024 Crestron Electronics, Inc.

Rev 12/02/24

Dimensions

Height	4.73 in. (121 mm)
Width	4.73 in. (121 mm)
Depth	3.03 in. (77 mm)

Compliance

Regulatory Mode: M202111001

UL® Listed

Models

ZUMLINK-IR-QUATTRO-DLS

Infrared Presence Detector with Daylight Sensing and Link Communication for Züm® Wired Lighting Control

ZUMLINK-IR-QUATTRO-DLS-RLY

Infrared Presence Detector with Daylight Sensing, HVAC Control, and Link Communication for Züm® Wired Lighting Control

Available Accessories

For a list of available accessories, visit [ZUMLINK-IR-QUATTRO-DLS](#) and [ZUMLINK-IR-QUATTRO-DLS-RLY](#) product pages.

The original language version of this document is U.S. English. All other languages are a translation of the original document.

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or contact us for additional information by visiting www.crestron.com/contact/our-locations for your local contact.


The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed online at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, and Züm are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Bluetooth is either a trademark or registered trademark of Bluetooth SIG, Inc. in the United States and/or other countries. STEINEL is either a trademark or registered trademark of Steinel Vertrieb GmbH in the United States and/or other countries. UL is either a trademark or registered trademark of UL LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Infrared Presence Detectors with Zūm[®] Wired Lighting Control

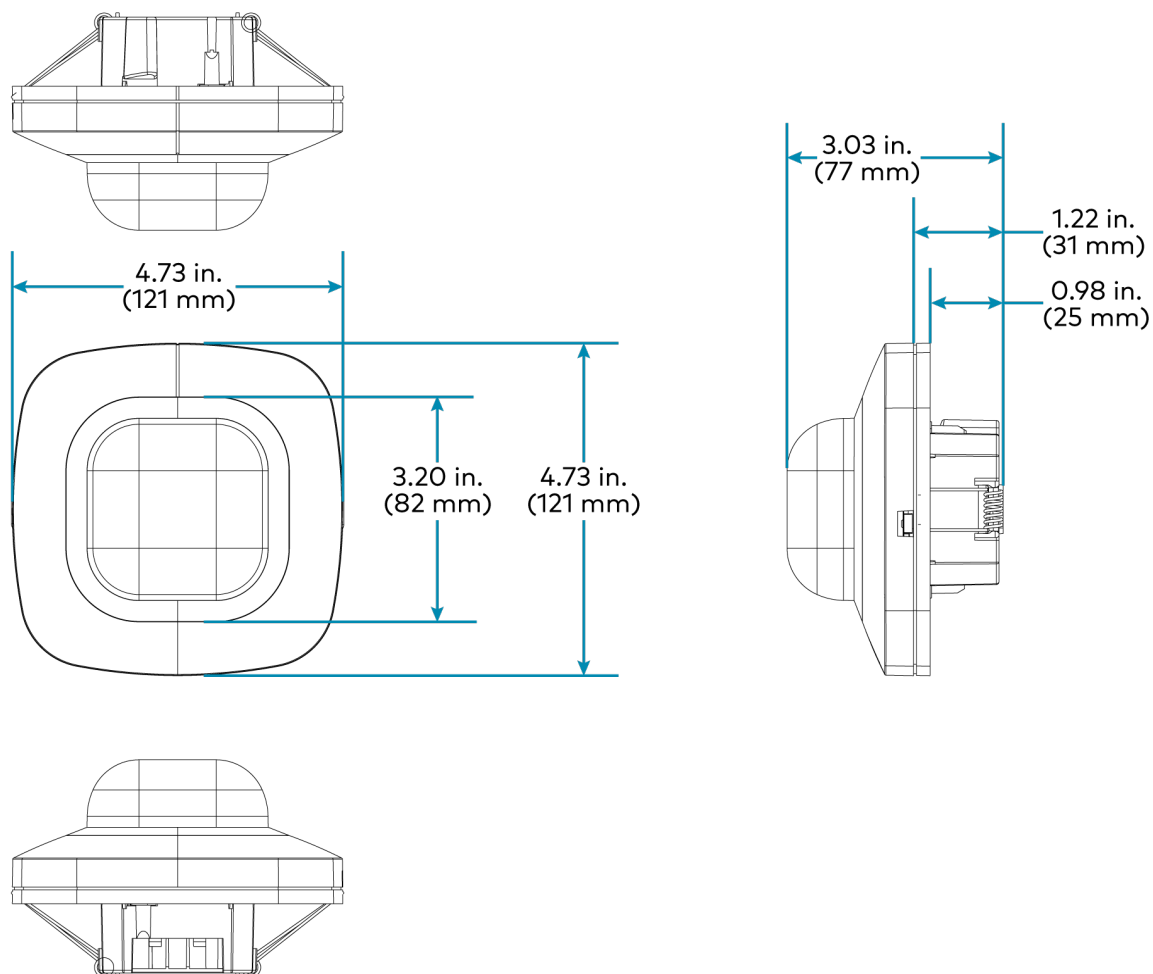


Infrared Presence Detectors with Zūm[®] Wired Lighting Control


Beam Pattern Coverage

NOTE: Detection along the far edge of the detection range may be inconsistent.

Top View

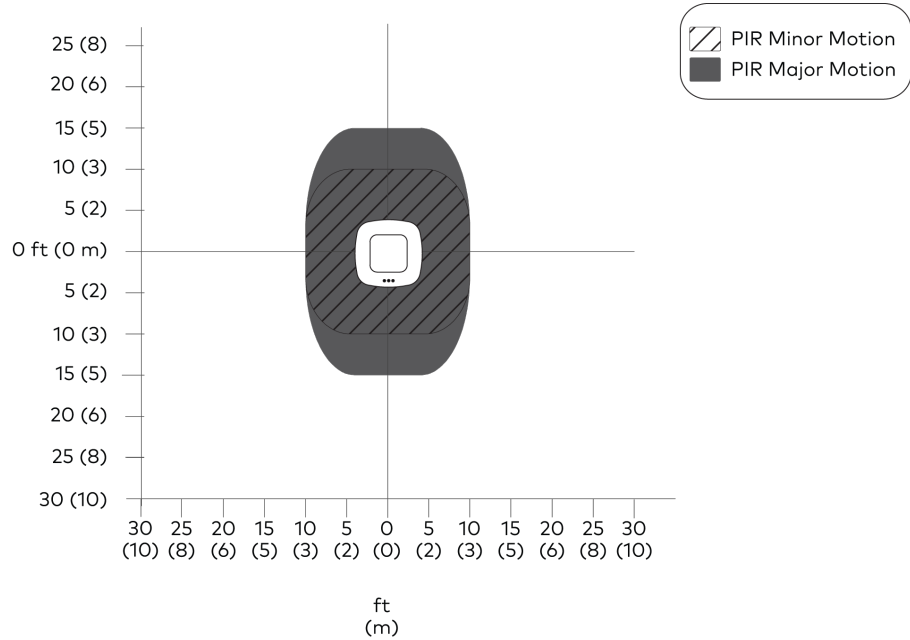

Side View Sensor Orientation A

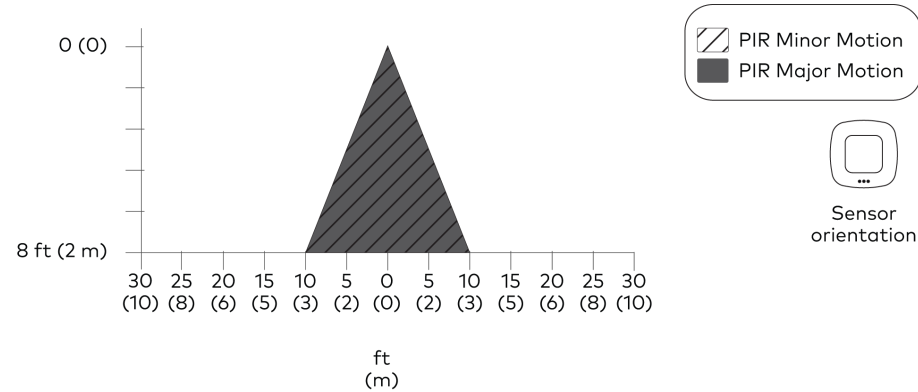

Infrared Presence Detectors with Zūm[®] Wired Lighting Control

Side View Sensor Orientation B

