


Laptop Single USB-C connection

System provides transmission of source content and UC peripherals using AVoIP. Host Laptop connects using a single USB-C port for power as well as all signals.

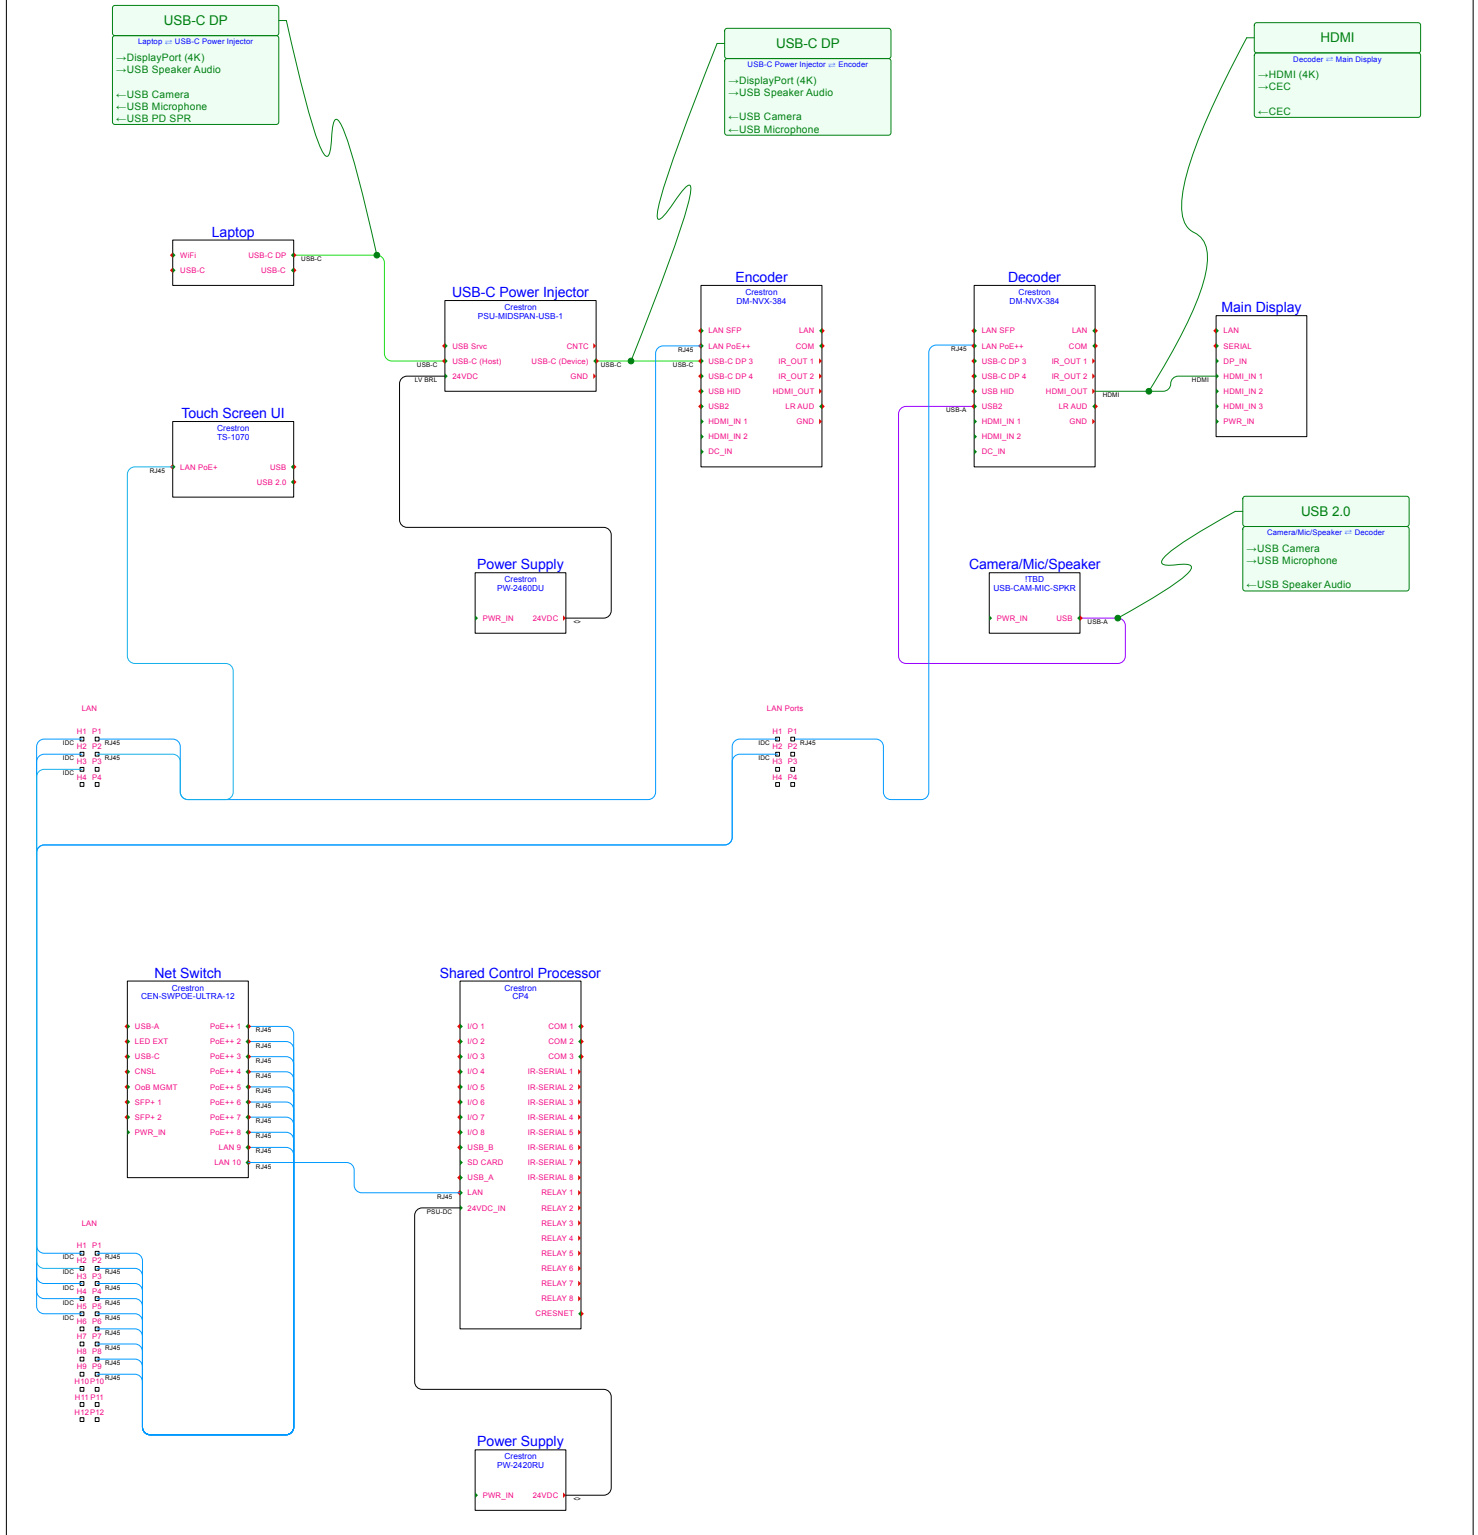

Signal Line Types	
	24VDC
	USB-C DP
	HDMI
	LAN PoE+
	LAN PoE++
	USB 2.0