AM-3200-GV

AirMedia® 3200 Receiver, Government Version



- *Fully featured TAA-compliant solution for government deployments*
- *Complete room solution enables secure presentation from laptops, smartphones, and tablet devices using either a wired HDMI® connection or a wireless AirMedia® connection*
- *Integration friendly features such as HDMI® input, dual LAN, balanced audio output, and display control via RS-232 and IR*
- *Enables smart automation via intelligent display control, occupancy detection, and integration into a broader connected ecosystem*
- *Enterprise-grade security and content encryption protects privacy and ensures compliance with IT policies*
- *XiO Cloud® service support for remote provisioning and management*
- *Built-in digital signage functionality with support for Appspace® software and other web-based signage providers*
- *Supports simultaneous display of up to four sources with AirMedia Canvas when presenting using the AirMedia Applications, Apple Screen Mirroring or Chrome Extension.*
- *Wireless conferencing and presentation allows for collaboration with in-room and remote participants*

The AirMedia® Receiver 3200, Government Version (AM-3200-GV) enables secure wireless collaboration in the modern digital workspace. Easy to deploy and manage, install the Receiver in conference rooms, huddle rooms, lounges, lobbies, or almost any space to establish a productive meeting environment. The AirMedia receiver is a fully featured TAA-compliant solution that is suitable for government deployments.

Connect and Present

The AirMedia Series 3 Receiver can be installed beneath, beside, or behind a wall-mount display and enables a smart room with wireless collaboration. The receiver features AirMedia wireless presentation capability, an HDMI® output that connects to a display (up to 4K), an HDMI input, and various USB interfaces for wireless conferencing. Connect your laptop, smart phone, tablet, or other source type to instantly present the source image on the display.

AirMedia Wireless Presentation

With AirMedia technology, users can wirelessly present content from laptops, smartphones, and tablet devices via a Wi-Fi wireless network. Present content from desktop or laptop computers using or the AirMedia extension for Google Chrome™ browser. Present content from Android™ and iOS® mobile devices with the AirMedia app.

For more information about AirMedia, visit www.crestron.com/airmedia.[1]

HDMI Connectivity

In addition to AirMedia, the AM-3200-GV includes an HDMI input for direct connection of a local source, such as a Mini PC, or a portable laptop computer via an optional wall plate or cable. The HDMI input supports HD 1080p/60 signals.[2]

Multi-Source Presentation

Supports simultaneous display of up to four sources with AirMedia Canvas when presenting using the AirMedia Applications, Apple Screen Mirroring or Chrome Extension. To maximize screen coverage, AirMedia Canvas automatically configures the best possible layout based on the number of active presenters, the type of sources, and their aspect ratios.[3] Use the AirMedia app or a connected Crestron touch screen (sold separately) to manage sources and their position on the display.

Wireless Conferencing

Wireless conferencing provides a premium collaboration experience by enabling video calling from almost any device.[4] The AirMedia application provides wireless access to a host of connected conferencing peripherals, such as soundbars, cameras, or speakerphones. When using the AirMedia application, peripherals are immediately available on the user's laptop for use in Microsoft Teams® or Zoom™ software.

Enhanced Onscreen Experience

When no source is connected, the AM-3200-GV displays a customizable welcome screen on the room display with simple

Crestron Electronics Inc.
15 Volvo Drive | Rockleigh, NJ 07647
www.crestron.com | 800.237.2041

AM-3200-GV

AirMedia® 3200 Receiver, Government Version

instructions for connecting and presenting. Integration with Microsoft Exchange Server® (for Outlook® and Microsoft 365® software users), Google Calendar™, or Crestron Fusion® room scheduling software enables the space's availability and meeting details to appear on screen. Throughout the meeting, notifications periodically indicate the remaining time and the next scheduled event. Pop-up messages sent from Crestron Fusion may also appear in the event of an emergency or to deliver an important announcement.

Add-on Control Options

Add a Power over Ethernet occupancy sensor (CEN-ODT-C-POE) to control display or digital signage on/off based on room occupancy or vacancy.

XiO Cloud® Provisioning and Management Service

The AM-3200-GV is compatible with the XiO Cloud service, which enables installers and IT managers to easily deploy and manage thousands of devices. The XiO Cloud service allows for system alerts and network management and provisioning.

For more information, visit www.crestron.com/xiocloud.

Crestron Fusion® Room Monitoring

Presentation spaces can be managed and centrally monitored through the Crestron Fusion enterprise management service. By adding an optional occupancy sensor (CEN-ODT-C-POE), the AM-3200-GV can detect and log when people are present in the space, automatically turn the display on and off, and make unoccupied spaces available for new bookings. Crestron Fusion software supports room scheduling, and can integrate with a variety of third-party calendaring applications. Instant alerts notify the help desk to rapidly resolve any problems and maximize uptime and workflow.

For more information about Crestron Fusion, visit www.crestron.com/fusion.

Digital Signage Functionality

Integrate the Appspace® digital signage application or other web-based signage providers with the AM-3200-GV. The AM-3200-GV can display digital signage content when no presentation is in progress or the room is unoccupied.

Enterprise-Grade Security

The AirMedia Presentation System is an enterprise-grade solution that can be deployed across multiple spaces and set up easily using a web browser or XiO Cloud software. Employing standard network security protocols such as 802.1x network access control, Active Directory® authentication, and AES content encryption, the AM-3200-GV protects privacy and ensures compliance with your organization's IT policies.

Crestron Electronics Inc.
15 Volvo Drive | Rockleigh, NJ 07647
www.crestron.com | 800.237.2041

AM-3200-GV

AirMedia® 3200 Receiver, Government Version

Specifications

Communications

Ethernet	100/1000 Mbps, auto-switching, autonegotiating, autodiscovery, full/half duplex, TCP/IP, UDP/IP, DHCP, SSL, TLS[5], SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1x, Active Directory authentication, HTTPS web browser setup and XiO Cloud service, 802.3at compliant
AirMedia	Via Ethernet: IPv4, mDNS, TLS, AES[1]
USB Host	USB 2.0 for connecting a USB conferencing peripheral; USB 3.0 for connecting a USB conferencing peripheral
USB Device	USB 3.0 for computer console (Toolbox setup and firmware update)
RS-232	2-way display device control up to 115.2k baud with hardware and software handshaking
IR/Serial	1-way display device control via infrared up to 1.1 MHz or serial TTL/RS-232 (0-5V) up to 19.2k baud
HDMI Input	HDCP 1.4, EDID; Supports management of HDCP and EDID
HDMI Output	HDCP 2.2, EDID, CEC; Supports management of HDCP and EDID

AirMedia Software[1]

OS Support	Apple® iOS®, Android™, Windows 10, Windows 11, macOS®, Chrome OS™
Video Frame Rate	Up to 30 fps, audio supported
Output Resolutions	640x480@60Hz, 800x600@60Hz, 1024x768@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x800@60Hz, 1366x768@60Hz, 1440x900@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60)

> **NOTE:** All video inputs will be scaled to the selected HDMI output resolution.

Bitrate Peak	0.25 to 8.5 Mbps, variable depending on content complexity
Bitrate Average	1.4 Mbps typical

> **NOTES:**
>
> - The bitrate for Apple native mirroring may deviate from above depending on the OS version and content.
> - The AirMedia Extension for the Google Chrome browser relies on web technologies for screen sharing that are built-in to the web browser. Performance variations with motion video (quality and frame rate) may occur based upon the encoding capabilities of the Chrome OS device and the nature of the content being displayed (i.e., high-motion video).

Audio Format	Stereo

Wireless Conferencing

OS Support (AirMedia Application)	Windows 10, Windows 11
Supported Conferencing Services	Microsoft Teams software; Zoom software
Supported Conferencing Peripherals	For a list of supported conferencing peripherals, refer to OLH Answer ID 1001764.

Video

Input Signal Types	AirMedia, HDMI (DVI & Dual-Mode DisplayPort™ compatible[2]); Supports simultaneous display of up to four sources with AirMedia Canvas when presenting using the AirMedia Applications, Apple Screen Mirroring or Chrome Extension.

Crestron Electronics Inc.
15 Volvo Drive | Rockleigh, NJ 07647
www.crestron.com | 800.237.2041

AM-3200-GV

AirMedia® 3200 Receiver, Government Version

Maximum Input Resolutions	HDMI Input: 1920x1080@60Hz (HD 1080p60); AirMedia presentation: 1920x1080@30Hz (1080p30)

> **NOTES:**
>
> - Other input resolutions are supported at pixel clock rates up to 148 MHz; interlaced video is not supported.
> - All video inputs will be scaled to the selected HDMI output resolution.

Output Signal Types	HDMI (DVI compatible[2])
HDMI Output Resolutions	1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x800@60Hz,[6] 1366x768@60Hz,[6] 1440x900@60Hz,[6] 1600x900@60Hz,[6] 1600x1200@60Hz, 1680x1050@60Hz,[6] 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 3840x2160@30Hz (2160p30), 3840x2160@50Hz (2160p50), 3840x2160@60Hz (2160p60)

> **NOTE:** All video inputs will be scaled to the selected HDMI output resolution.

Background & Logo File Support	JPEG, PNG

Audio

Input Signal Types	AirMedia, HDMI (Dual-Mode DisplayPort™ compatible[2])
Output Signal Type	HDMI
Input/Output Format	2 channel LPCM

> **NOTE:** Audio input signals are passed to the output without any processing. Volume control capability requires a display device with discrete volume, up, down, and mute commands available via CEC, IP, IR, or RS-232.

Connectors

IR	(1) 2-pin 3.5 mm detachable terminal block; IR/Serial output port for display device control; IR output up to 1.1 MHz; 1-way serial TTL/RS-232 (0-5V) up to 19200 baud
COM	(1) 5-pin 3.5 mm detachable terminal block; Bidirectional RS-232 port for display device control; Up to 115.2k baud, hardware and software handshaking support
AUDIO OUT	(1) 5-pin 3.5 mm detachable terminal block; Balanced/unbalanced stereo line-level audio output; Maximum Output Level: 4 Vrms balanced, 2 Vrms unbalanced; Output Impedance: 200 ohms balanced, 100 ohms unbalanced
microSD	For caching digital signage content
HDMI INPUT	(1) HDMI Type A connector; HDMI digital video/audio input; (DVI & Dual-Mode DisplayPort compatible[2])
HDMI OUTPUT	(1) HDMI Type A connector; HDMI digital video/audio output (DVI compatible)
USB	(2) USB Type A connectors; (1) USB Type B connector; USB 3.0 device port for computer console
LAN PoE+	(1) 8-pin RJ-45 connector; 100Base-TX/1000Base-T Ethernet port and PoE+ Class 4
LAN AUX	(1) 8-pin RJ-45 connector; 100Base-TX/1000Base-T Ethernet port; Connects to a secondary, guest-only network
24VDC 1.25A	(1) 2.1 x 5.5 mm DC power connector; 24VDC power input; PW-2412WU power pack sold separately

Controls and Indicators

PWR	(1) Green LED, indicates operating power supplied via the local power pack or PoE+

Crestron Electronics Inc.
15 Volvo Drive | Rockleigh, NJ 07647
www.crestron.com | 800.237.2041

AM-3200-GV

AirMedia® 3200 Receiver, Government Version

RESET	(1) Recessed push button for hardware reset
SETUP	(1) Green LED and (1) recessed push button for onscreen IP address display
ONLINE	(1) Green LED, indicates control system connection
HDMI IN/OUT	(2) Green LEDs, indicate HDMI signal presence at the HDMI input/output
microSD	(1) microSD slot
LAN PoE+	(2) LEDs, green LED indicates Ethernet link status, amber LED indicates Ethernet activity
LAN AUX	(2) LEDs, green LED indicates Ethernet link status, amber LED indicates Ethernet activity

Power

Power over Ethernet	IEEE 802.3at Class 4 Powered Device
Power Pack (sold separately)	Input: 100-240VAC, 50/60 Hz; Output: 1.25A @ 24VDC; Model: PW-2412WU
Power Consumption	14 W (typical)

> **NOTE:** When wireless conferencing is used, the receiver must be powered by either Power over Ethernet+ (PoE+) or a power pack (sold separately).

Environmental

Temperature	32° to 104°F (-0° to 40° C)
Humidity	10% to 90% RH (non-condensing)
Heat Dissipation	47.8 BTU/hr

Construction

Chassis	Metal, black finish, with (2) integral mounting flanges, vented sides
Mounting	Freestanding, surface mount, or attach to a single rack rail

Dimensions

Height	1.26 in. (33 mm)
Width	7.40 in. (188 mm)
Depth	6.54 in. (166 mm)

Weight

1.9 lb (0.86 kg)

Compliance

Regulatory Model: M202011001

Intertek® Listed for US & Canada, CE, IC, FCC Part 15 Class B digital device

Model

AM-3200-GV

AirMedia® Receiver 3200, Government Version

Available Accessories

Notes:

1. AirMedia wireless presentation requires a wired network connection between the AirMedia receiver and an external Wi-Fi wireless access point (not included). Laptops may alternately connect to AirMedia using a wired Ethernet connection. Full-motion video performance is dependent upon the performance of the network and the sending device. Computer client software and mobile device apps are available for download at www.crestron.com/airmedia.
2. Using an appropriate adapter or interface cable, the HDMI input can support DVI and Dual-Mode DisplayPort sources, and the HDMI output can provide a DVI signal. CBL-HD-DVI interface cables are available separately.
3. When the AirMedia Canvas feature is enabled, the 4:2:0 color space is used for high definition sources connected to the HDMI input port. When the AirMedia Canvas feature is disabled, the 4:4:4 color space is used. If the 4:4:4 color space is required by sources connected to the HDMI input port, the AirMedia Canvas feature should be disabled.
4. Crestron supports most mainstream devices and applications. For a list of supported conferencing peripherals, refer to OLH Answer ID 1001764.
5. TLS 1.3 is currently not supported.
6. With or without reduced blanking.

Crestron Electronics Inc.
15 Volvo Drive | Rockleigh, NJ 07647
www.crestron.com | 800.237.2041

AM-3200-GV

AirMedia® 3200 Receiver, Government Version

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or contact us for additional information by visiting www.crestron.com/contact/our-locations for your local contact.

The original language version of this document is U.S. English.
All other languages are a translation of the original document.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed online at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, AirMedia, Crestron Fusion, and XiO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Apple and macOS are either trademarks or registered trademarks of Apple, Inc. in the United States and/or other countries. Appspace is either a trademark or a registered trademark of Appspace Inc. in the United States and/or other countries. Bluetooth is either a trademark or registered trademark of Bluetooth SIG, Inc. in the United States and/or other countries. IOS is either a trademark or registered trademark of Cisco Systems, Inc. in the United States and/or other countries. Android, Chrome, Chrome OS, Google, and Google Calendar are either trademarks or registered trademarks of Google Inc. in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Intertek is either a trademark or registered trademark of Intertek Group in the United States and/or other countries. Active Directory, Microsoft 365, Microsoft Exchange Server, Microsoft Teams, Outlook, and Windows are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. USB-C is either a trademark or registered trademark of USB Implementers Forum, Inc. in the United States and/or other countries. DisplayPort is either a trademark or registered trademark of Video Electronics Standards Association in the United States and/or other countries. Zoom Rooms is either a trademark or registered trademark of Zoom Video Communications, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.


©2026 Crestron Electronics, Inc.


Rev 08/07/26


Crestron Electronics Inc.
15 Volvo Drive | Rockleigh, NJ 07647
www.crestron.com | 800.237.2041

AM-3200-GV

AirMedia® 3200 Receiver, Government Version



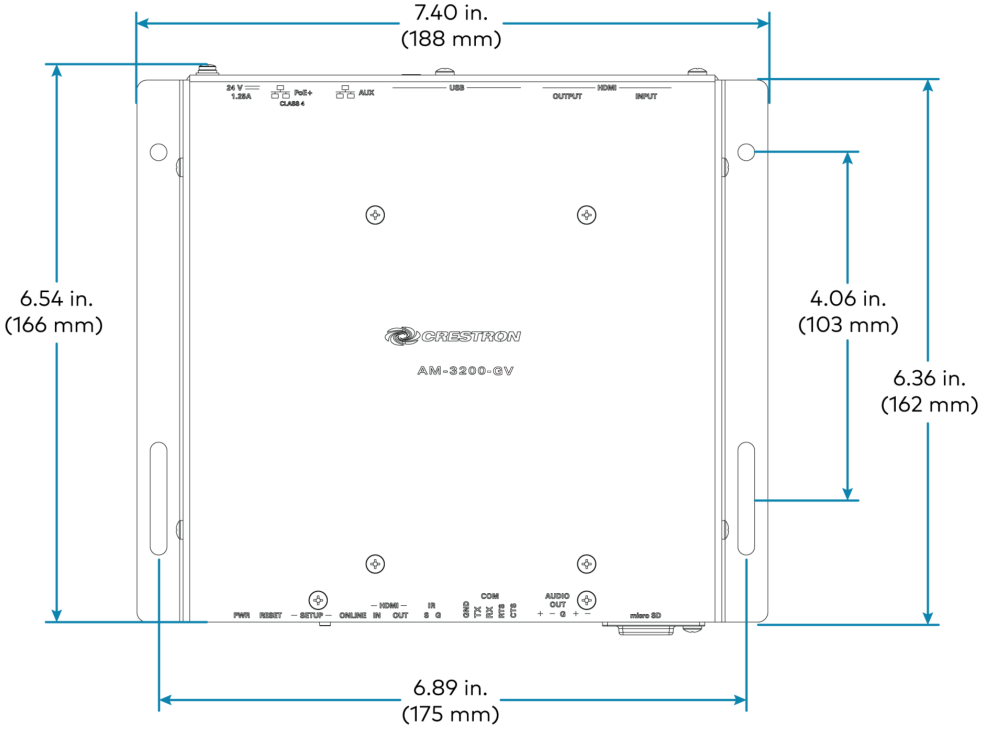

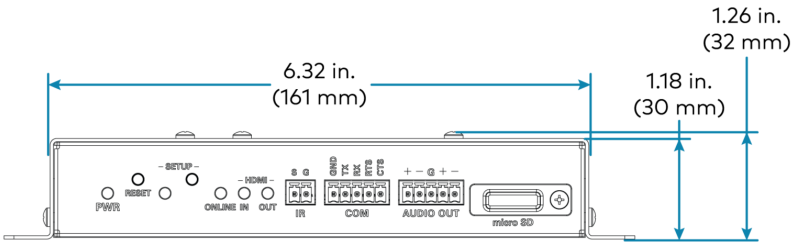

Crestron Electronics Inc.
15 Volvo Drive | Rockleigh, NJ 07647
www.crestron.com | 800.237.2041