


C2N-RTHS

Remote Temperature and Humidity Sensor, Cresnet® Wired

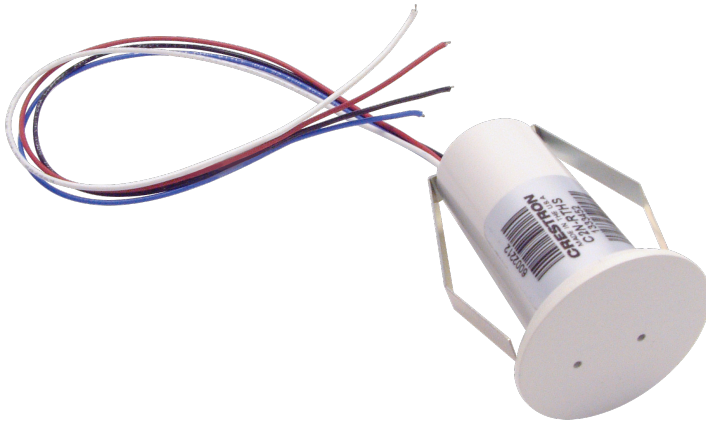

- *Wall-mounted remote temperature and humidity sensor*
- *System integration via Cresnet® wired communications*
- *Simple installation*
- *Optional [MMK-RS](#) pre-construction mounting kit (sold separately) allows for simplified rough-in for wiring and positioning, as well as an option to completely flush mount the sensor*

The [C2N-RTHS](#) is a wall-mounted remote temperature and relative humidity sensor that communicates with a Crestron® [Control System](#) over the Cresnet® wired control network. One-piece mounting makes the C2N-RTHS simple to install. The 1-1/2 in. diameter face protrudes just 1/8 in. from the wall surface and is easily painted or wallpapered to blend into the wall surface.

Use with the [MMK-RS](#) (sold separately) to simplify the wiring and sensor positioning during the rough-in stage of construction. The MMK-RS has an option to completely flush mount the sensor and make it virtually hidden on a wall.

Specifications

Measurement Range

Temperature	-40° to 176°F (-40° to 80°C)
Humidity	0% to 100% RH

Temperature Tolerance

Over Full Range	±1°F (±0.5°C)
Output Resolution	0.1°F (0.1°C); 1% RH

Humidity Tolerance

±5%

Connections

(1) ~10 in. (254 mm) 4-wire pigtail;
Connects to Cresnet® wired control network

Controls

Setup (1) recessed miniature push button;
Used for Touch-Settable ID (TSID)

Power Requirements

Cresnet Power Usage 0.25 W (0.01A @ 24VDC)

Construction

Material	Cylindrical plastic; Primed metal cap suitable for paint or wallpaper
Mounting	Drywall mountable in a 1 in. (26 mm) diameter round hole, protrudes ~1/8 in. (3 mm) from wall surface; Flush drywall mount or non-drywall surface mount with MMK-RS mounting kit (sold separately)

Dimensions

Diameter	1.50 in. (39 mm)
Depth	2.22 in. (57 mm)

Model

C2N-RTHS

Remote Temperature and Humidity Sensor, Cresnet® Wired

C2N-RTHS

Remote Temperature and Humidity Sensor, Cresnet® Wired

Available Accessories

For a list of available accessories, visit the [C2N-RTHS](#) product page.

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or contact us for additional information by visiting www.crestron.com/contact/our-locations for your local contact.

The original language version of this document is U.S. English. All other languages are a translation of the original document.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed online at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, and Cresnet are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.

©2024 Crestron Electronics, Inc.

Rev 02/05/24

C2N-RTHS

Remote Temperature and Humidity Sensor, Cresnet® Wired

