


CLX-4HSW4

4 Channel High-Inrush Switch Module, 4 Feeds, 120V

- > Four-channel high-inrush switch module for residential lighting applications
- > Installs in a Crestron® CAEN or CAEN-MLO enclosure
- > Supports on/off switching of LED, incandescent, fluorescent, magnetic low-voltage, electronic low-voltage, neon/cold cathode, and high-intensity discharge lighting loads
- > Also supports on/off switching of 1/2 HP motor loads
- > Individual feed inputs per channel
- > Rated 16 Amps per channel, 64 Amps total (using four 20 Amp feeds), at 120 Volts AC
- > Built-in air gap relay per channel
- > Convection cooled for silent operation
- > Closure-activated override mode
- > UL® 924 and CSA® C22.2 No. 141-15 listed for emergency lighting control
- > Crestron system integration via Cresnet®
- > Easy termination using a CLT-4HSW4 terminal block (sold separately)
- > CEC Title 24 2013 compliant

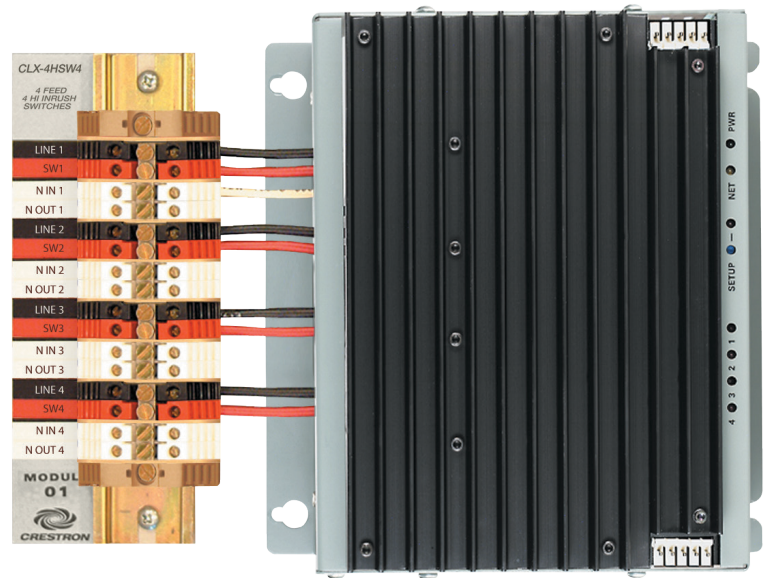

Shown with CLT-4HSW4 terminal block (sold separately)

The Crestron® CLX-4HSW4 is a four-channel, four-feed switch module designed for 120V lighting system applications. It installs in a [CAEN](#) or [CAEN-MLO](#) enclosure and provides control of non-dimmable lighting loads including LED, incandescent, fluorescent, magnetic low-voltage, electronic low-voltage, neon/cold cathode, and high-intensity discharge. It can also be used to switch motor loads. Individual feed capability provides four independent single-channel switches in one module space. Each channel is rated for 16 Amps, with a total module rating of 64 Amps when fed from four separate 20 Amp feeds.

Air-Gap Relays

An air-gap relay on each channel output allows individual circuits to be serviced without disabling the entire module.

Silent Operation

Low-maintenance convection cooling with over-sized heatsinks affords silent operation with no mechanical components to wear out.

Centralized Lighting Cabinet Installation

Crestron CLX series lighting control modules are designed to be installed in a CAEN or CAEN-MLO wall mount enclosure. Available in a variety of sizes, CAEN and CAEN-MLO enclosures provide a scalable, high-density centralized lighting control solution for any-sized residence. A selection of CLX module types is offered to accommodate a wide range of load types and system configurations.

Termination of high-voltage wiring to the CLX-4HSW4 module is facilitated using a [CLT-4HSW4](#) terminal block, which is sold separately to enable termination of the wiring prior to installing the module. This terminal block mounts beside the module within the enclosure. Low-voltage control signals are bussed between each of the modules within an enclosure via a simple 5-wire link (interconnect jumpers included), which terminates to a single terminal block (model [CAEN-BLOCK](#), sold separately) at the bottom of the enclosure.

Cresnet® Communications

The CLX-4HSW4 interfaces with a Crestron [control system](#) (a.k.a., control processor or automation processor) via Cresnet. Cresnet is a simple 4-wire network bus that provides the communications backbone for a system of Crestron lighting dimmers, switches, keypads, shades, thermostats, and other devices.

Emergency Lighting Control

The CLX-4HSW4 is UL® 924 and CSA® C22.2 No. 141-15 listed for use in controlling emergency lighting loads. In the event of a power failure, a contact closure from a power loss sensor (Crestron [GLS-PLS-120/277](#), sold separately) activates the override mode in the CLX-4HSW4 to turn on each designated lighting load if it is off (assuming line power is supplied by a backup power source).

CLX-4HSW4 4 Channel High-Inrush Switch Module, 4 Feeds, 120V

SPECIFICATIONS

Load Control

Switch Channels: 4

Switched Load Types: LED, incandescent, fluorescent, magnetic low-voltage, electronic low-voltage, neon/cold cathode, high-intensity discharge (HID), motor

Per Channel Load Rating: 16 Amps, 1/2 HP

Module Total Load Rating: 64 Amps ^[1]

Line/Load Voltage: 120 Volts AC, 60 Hz; requires up to four single-phase feeds (may be same or different phases)

Connections

Via Terminal Block (sold separately):

LINE 1 – 4: (4) Screw terminals, black, line power feed inputs (per channel)

SW 1 – 4: (4) Screw terminals, red, load outputs (per channel)

N IN 1 – 4: (4) Screw terminals, white, line power feed neutrals (per channel)

N OUT 1 – 4: (4) Screw terminals, white, load neutrals (per channel)

Note: Each terminal accepts one 14-10 AWG wire.

Module Interconnect: (2) 5-pin 0.156 inch headers;

Cresnet/Override interconnect ports;

Each connects to the adjacent module using the interconnect jumper provided; connects to a **CAEN-BLOCK** (sold separately) when installed in the lowest position within the enclosure

Controls & Indicators

PWR: (1) Green LED, indicates line power is applied to the LINE 1 terminal

NET: (1) Yellow LED, indicates Cresnet communication with the control system

SETUP: (1) Pushbutton and (1) red LED, used to enter Local mode and test each channel

1 – 4: (4) Red LEDs, each indicates the status of the corresponding channel

Environmental

Temperature: 32° to 104° F (0° to 40° C)

Humidity: 10% to 90% RH (non-condensing)

Heat Dissipation: 16 BTU/hr + (0.41 BTU/hr x Load Current in Amps);
42 BTU/hr at maximum load

Enclosure

Gray metal with black heat sink, surface mount module with (2) integral mounting flanges;

Occupies 1 module space in a **CAEN** or **CAEN-MLO** enclosure

Dimensions

Height: 7.59 in (193 mm)

Width: 6.92 in (176 mm)

Depth: 3.43 in (87 mm)

Weight

3.00 lb (1.36 kg)

Compliance

UL Listed for US & Canada, IC, UL 508, UL 924, CSA C22.2 No. 14, CSA C22.2 No. 141-15, CEC Title 24 2013, FCC Part 15 Class A digital device

MODELS & ACCESSORIES

Available Models

CLX-4HSW4: 4 Channel High-Inrush Switch Module, 4 Feeds, 120V

Available Accessories

CLT-4HSW4: Terminal Block for CLX-4HSW4

CAEN: Automation Enclosures

CAEN-MLO: Automation Enclosures with Integrated Breaker Panel

Notes:

1. When connecting to a third-party arc fault breaker, the total load should not exceed 1,000 Watts per feed.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, and Cresnet are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. CSA is either a trademark or registered trademark of Canadian Standards Association in the United States and/or other countries. UL is either a trademark or registered trademark of UL LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2021 Crestron Electronics, Inc.

CLX-4HSW4 4 Channel High-Inrush Switch Module, 4 Feeds, 120V

