

## DIN Rail Enclosures, 18 M Wide Rails



DIN-EN-2X18 shown

- DIN rail enclosure for Crestron® DIN devices
- Available with 2, 3, or 6 DIN rails, 18 M wide
- Removable front cover for easy device access
- Intertek® Listed for US & Canada

The Crestron® DIN-EN series of enclosures provide centralized mounting solutions for DIN rail products such as the [DIN-AP3](#), [DIN-DALI-2](#), and [DIN-1DIMU4](#). Third-party DIN devices can also be installed. Included with these enclosures is a removable front cover for easy access to installed devices.

### DIN Rail Mounting

Crestron DIN-EN enclosures utilize 18 M wide DIN rails with 1 M (18 mm) of extra space between the end of the DIN rail and the enclosure wall to provide room for DIN device locking blocks or for wiring along the sides of the enclosure. Each enclosure is available in three sizes to accommodate two, three, or six DIN rails.

## Specifications

### DIN Rail Detail

DIN-EN-2X18	(2) 342 mm x 35 mm rails
DIN-EN-3X18	(3) 342 mm x 35 mm rails
DIN-EN-6X18	(6) 342 mm x 35 mm rails

### Environmental

Temperature	32° to 104° F (0° to 40° C)
Humidity	10% to 90% RH (noncondensing)

### Construction

Enclosure	16-gauge galvanized steel
Cover	16-gauge galvanized steel; Gray powder coat finish
Mounting	Surface wall mount

### Dimensions

DIN-EN-2X18	Height: 12.32 in. (323 mm); Width: 14.13 in. (359 mm); Depth: 4.38 in. (111 mm)
DIN-EN-3X18	Height: 23.50 in. (597 mm); Width: 14.38 in. (366 mm); Depth: 4.44 in. (113 mm)
DIN-EN-6X18	Height: 38.88 in. (989 mm); Width: 14.38 in. (366 mm); Depth: 4.44 in. (113 mm)

### Weight

DIN-EN-2X18	11.4 lb (5.17 kg)
DIN-EN-3X18	20.3 lb (9.18 kg)
DIN-EN-6X18	30.5 lb (13.83 kg)

### Compliance

Intertek® Listed for US & Canada;  
Empty enclosure is designed to meet UL50 & CSA C22.2 No 94.1

## Models

### DIN-EN-2X18

Enclosure for DIN Rail Devices, 2 DIN Rails, 18 M Wide

### DIN-EN-3X18

Enclosure for DIN Rail Devices, 3 DIN Rails, 18 M Wide

### DIN-EN-6X18

Enclosure for DIN Rail Devices, 6 DIN Rails, 18 M Wide

## DIN Rail Enclosures, 18 M Wide Rails

The original language version of this document is U.S. English.  
All other languages are a translation of the original document.

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/How-To-Buy/Find-a-Representative](http://www.crestron.com/How-To-Buy/Find-a-Representative) or contact us for additional information by visiting [www.crestron.com/contact/our-locations](http://www.crestron.com/contact/our-locations) for your local contact.

The product warranty can be found at [www.crestron.com/warranty](http://www.crestron.com/warranty).


The specific patents that cover Crestron products are listed online at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/opensource](http://www.crestron.com/opensource).


Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Intertek is either a trademark or registered trademark of Intertek Group in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.  
©2025 Crestron Electronics, Inc.  
Rev 07/22/25

DIN Rail Enclosures, 18 M Wide Rails

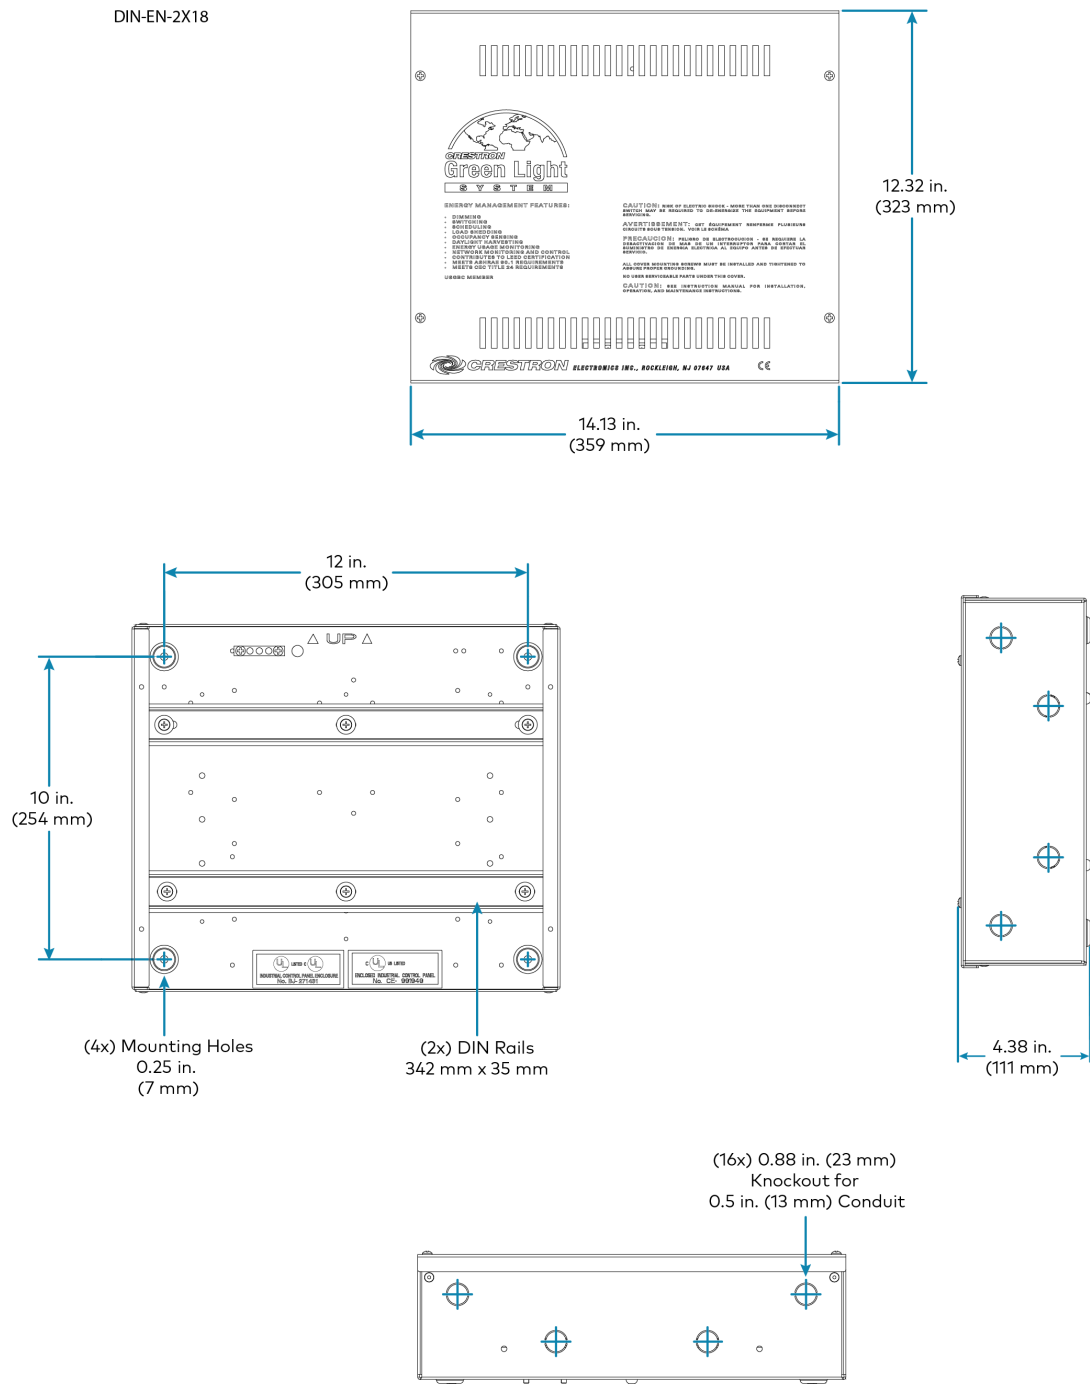

DIN Rail Enclosures, 18 M Wide Rails

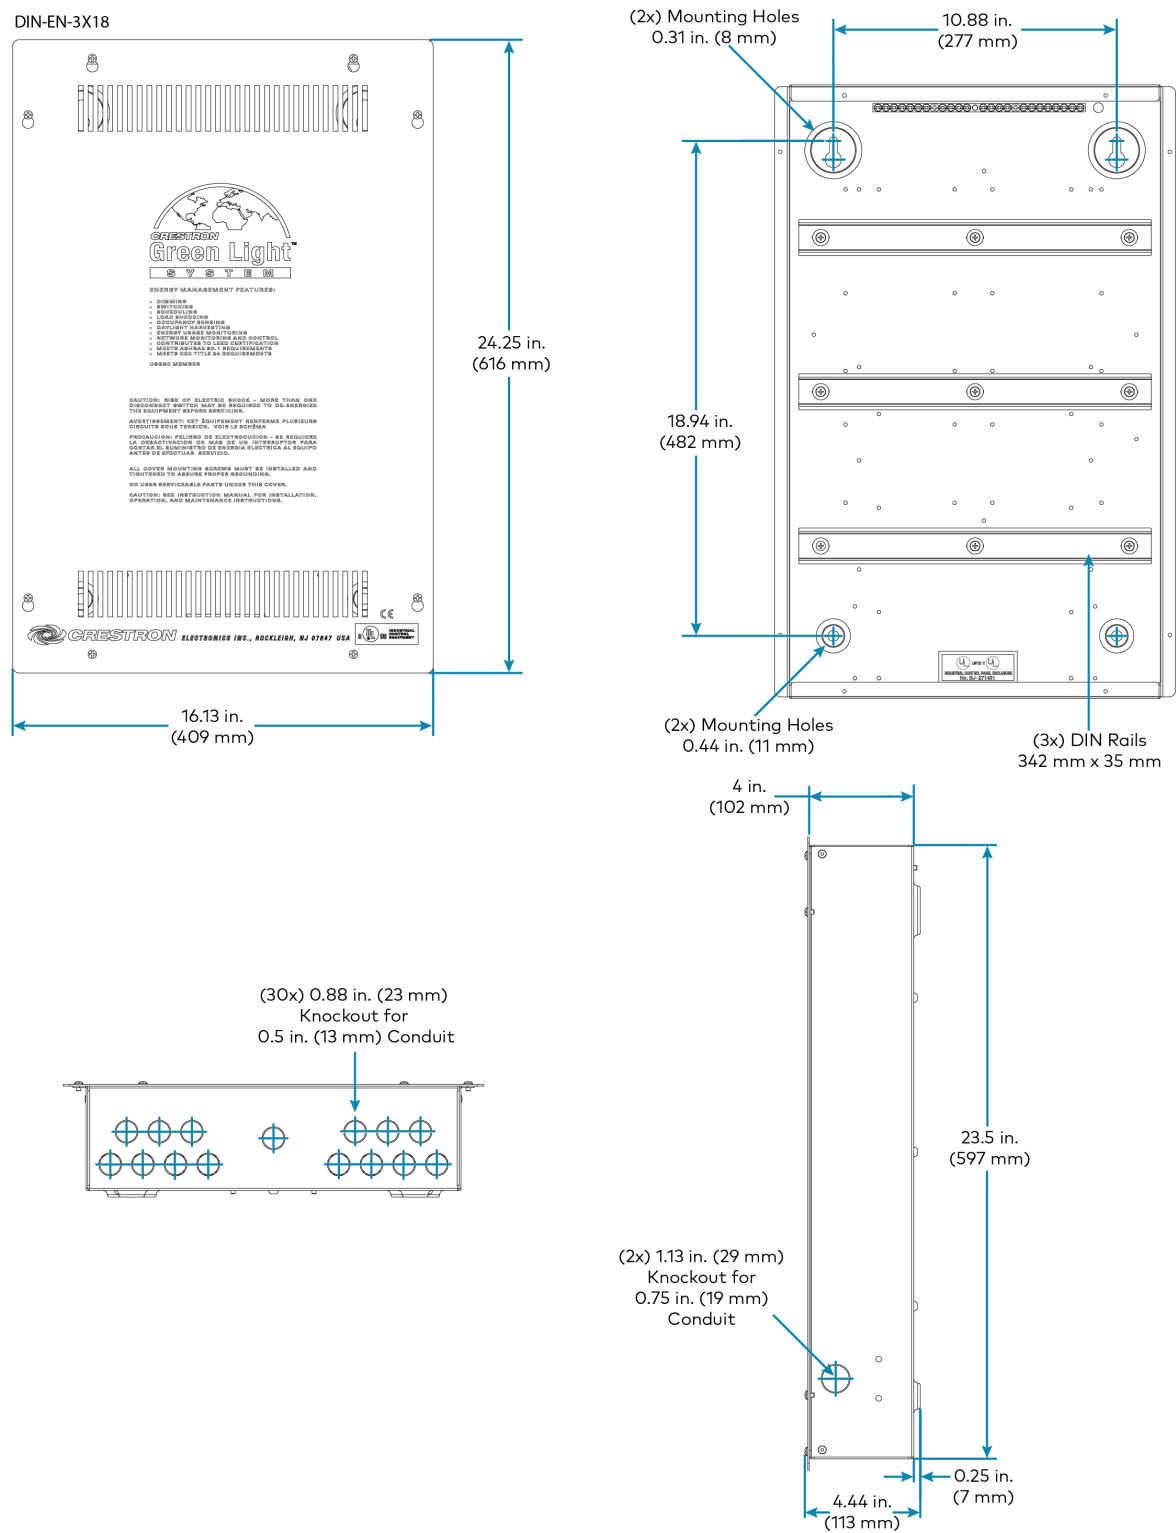

DIN Rail Enclosures, 18 M Wide Rails

DIN-EN-6X18

